


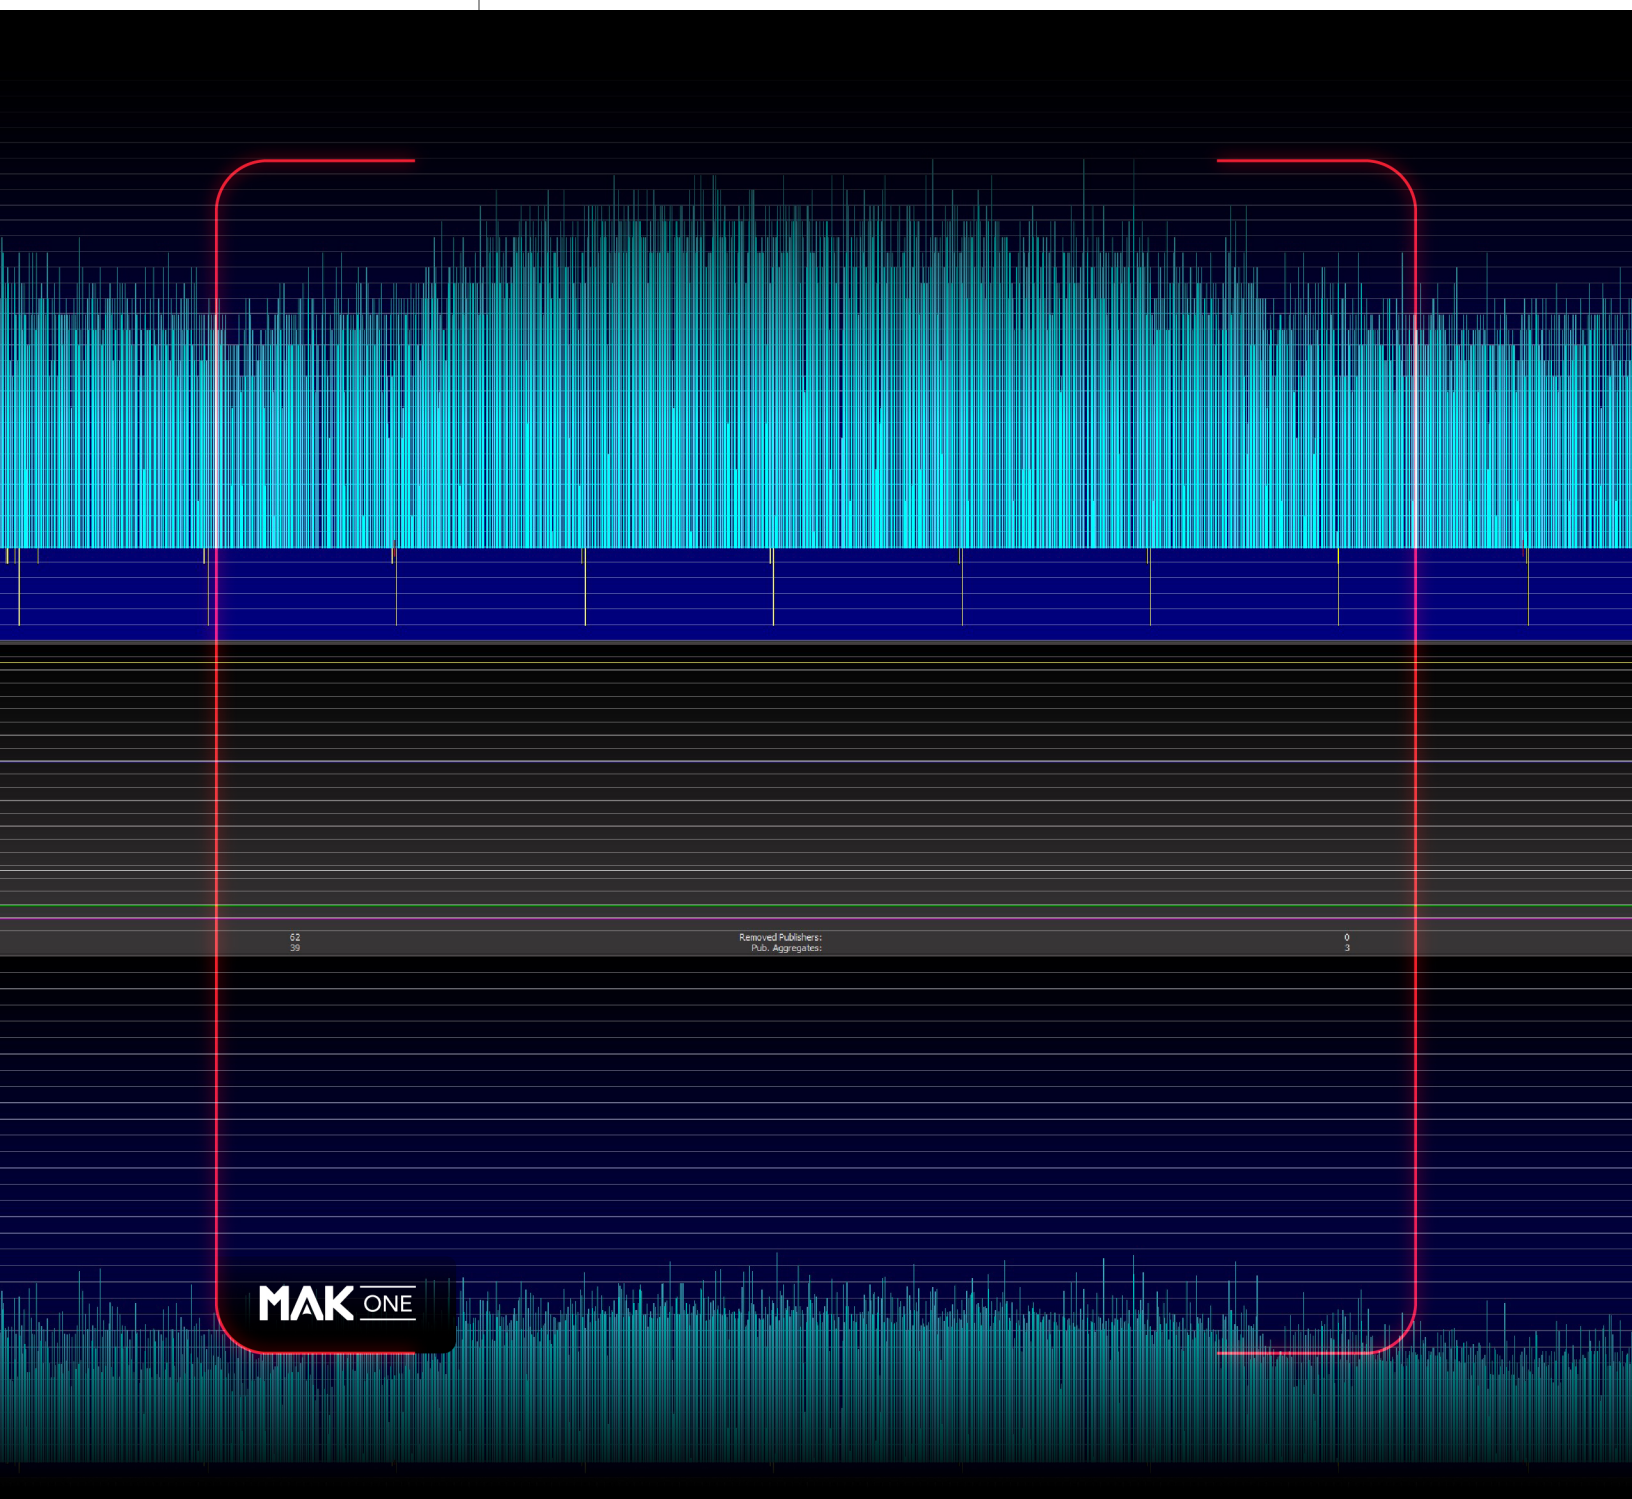

Copyright © 2024 MAK Technologies
All rights Reserved. Printed in the United States.

Under copyright laws, no part of this document may be copied or reproduced in any form without prior written consent of MAK Technologies.

VR-Exchange™, VR-TheWorld™, VR-Vantage™, DI-Guy™, and DI-Guy Scenario™ are trademarks of MAK Technologies. MAK Technologies®, VR-Forces®, RTIsPy®, B-HAVE®, and VR-Link® are registered trademarks of MAK Technologies.

GL Studio® is a registered trademark of The DiSTI® Corporation.

Portions of this software utilize SpeedTree® technology (©2008 Interactive Data Visualization, Inc.). SpeedTree is a registered trademark of Interactive Data Visualization, Inc. All rights reserved.

SilverLining™ is a trademark of Sundog Software.

Terrain Profiles are based in part on the work of the Qwt project (<http://qwt.sourceforge.net>).

3ds Max® is a registered trademark of Autodesk, Inc.

All other trademarks are owned by their respective companies.

For third-party license information, see "Third-Party Licenses" on page 19 in the Preface.

MAK Technologies
10 Fawcett Street, Suite 204
Cambridge, MA 02138 USA

Voice: +1 617.876.8085

Fax: +1 617.876.9208

info@mak.com

www.mak.com

Revision LOG-5.11.1-1-240930



Contents

Preface

3.1. How the Manual is Organized	14
Logger Documentation	15
Try the Help	15
MAK Products	15
How to Contact Us	17
Telephone	17
E-mail	17
Internet	17
Post	18
Document Conventions	18
Mouse Button Naming Conventions	19
Third-Party Licenses	19
Third-Party Libraries Supported	19
Library Licensing	20
Boost License	22
libXML and libICONV	23

1. Introduction

1.1. Logger Features	26
1.1.1 Logger Interfaces	26
1.1.2 Filtering	27
1.1.3 Annotations	27
1.1.4 Editing	27
1.1.5 Streaming Video	27
1.1.6 Data Export	28
1.1.7 HLA Traffic Analyzer	28
1.1.8 The Remote Control Logger	28

1.1.9 Sample Logger Files	28
1.1.10 Sample Programs	30
1.2. Distributed Simulation Standards Supported	30
1.2.1 RTI Support	30
1.2.2 FOM Support	30

2. Installing the Logger

2.1. Installing MAK Data Logger	34
2.1.1 Installation and Data Packages	34
2.1.2 Installing the Logger on Windows	34
2.1.3 Installing the Logger on Linux Systems	35
2.1.4 Installing Logger PDB Files for Debugging Purposes	35
2.1.5 Required Software for Toolkit Users	37
2.1.6 ODBC Driver Support	37
2.1.7 Uninstalling from Windows	37
2.1.8 Uninstalling from Linux	38
2.2. The Logger Directory Structure	38
2.3. Installing and Setting Up the MAK License Manager	39
2.3.1 Specifying the License Server	39
2.4. Installing an RTI	41
2.4.1 Installing the MAK RTI	42
2.5. Localizing the Graphical User Interface	43
2.5.1 Translating Other Interface Files	45
2.5.2 Applying the Language Files	45

3. Logger Concepts

3.1. What the Logger Does During Recording and Playback	48
3.1.1 The Exercise Connection	48
3.1.2 What The Logger Does During Recording	48
3.1.3 What the Logger Does During Playback	49
3.1.4 Recording and Playback Using HLA Time Management	50
3.2. Timescale During Playback	51
3.2.1 Using Time Scaling with Time Management	51
3.2.2 Compensating for Timescale Effects During Playback	51
3.3. HLA Support	53
3.3.1 FOM Flexibility	53
3.3.2 Backward Compatibility	53

4. Configuring the Logger Connection

4.1. Configuring the Exercise Connection	57
4.1.1 Viewing Connection Properties	57

4.1.2 Editing a Connection	57
4.2. Configuring the Logger for HLA	58
4.2.1 Specifying the Name of the Logger Federate (HLA Evolved Only)	59
4.2.2 Specifying the Type of the Logger Federate	60
4.2.3 Specifying the Federation Execution Name	60
4.2.4 Specifying a FED File	61
4.2.5 Specifying FOM Modules (HLA Evolved Only)	61
4.2.6 Specifying the MIM (HLA Evolved Only)	61
4.2.7 Specifying the RPR FOM Version	62
4.2.8 Specifying the RPR FOM Revision	62
4.2.9 Ignoring Advisory Messages	63
4.2.10 Specifying a FOM Mapper	63
4.2.11 Configuring Time Management	65
4.2.12 Specifying the Logger Subscription List	66
4.2.13 Subscribing Passively to Objects and Interactions	68
4.2.14 Enabling Request Attribute Updates	69
4.2.15 Sending Only Updated Values	69
4.3. Configuring the Logger for DIS	70
4.3.1 Specifying a UDP Port	70
4.3.2 Setting the Exercise ID	71
4.3.3 Setting the Site ID	71
4.3.4 Setting the Application Number	71
4.3.5 Using Asynchronous I/O	72
4.3.6 Specifying a Destination Address for Outgoing and Incoming Data	72
4.3.7 Setting the Subnet Mask	72
4.3.8 Setting the Buffer Size for Sending and Receiving PDUs	73
4.3.9 Setting the Multicast Time to Live Value	73
4.3.10 Setting the Network Interface Address	73
4.3.11 Specifying the Heartbeat	74
4.3.12 Specifying the Timeout	75
4.3.13 Specifying the DIS Version	75
4.3.14 Subscribing to Multicast Groups	75

5. Configuring the Logger

5.1. Configuring the Logger	78
5.2. Configuring Indexing	78
5.2.1 Configuring Indexing with the Command Interfaces	79
5.3. Configuring Faster Playback	80
5.3.1 The SetEntityTracking Command	80
5.3.2 The SetFastJumpsWithoutDiff Command	81
5.3.3 The SetPlaybackReadTimeLimit Command	81
5.3.4 Configuring HLA Heartbeating	82

5.3.5 Configuring HLA Timeouts	83
5.4. Setting the Dead Reckoning Algorithm on Pause	83
5.5. Configuring Network Read Time	84
5.6. Using Data Distribution Management	85
5.6.1 Specifying Subscription Regions	86
5.6.2 Using Conveyed Regions	88
5.6.3 Using Simulation Data	89
5.6.4 Configuring DDM	89
5.6.5 Configuring DDM in lgrConfig.xml	91
5.7. Setting the Notification Level	91
5.7.1 Specifying the Log File	92
5.8. Configuring Streaming Video	92
5.8.1 Video Record Settings	92
5.8.2 Video Playback Settings	93
5.8.3 Video Advanced Settings (Configuring GStreamer)	94
5.9. Disabling and Enabling Dark Mode	95
5.10. Editing lgrConfig.xml	95
Command Syntax	97
Variable Syntax	97
5.10.1 Adding a Command to lgrConfig.xml	98
5.11. Summary of Command-line Options for the Logger	99

6. Starting the Logger

6.1. Starting the Logger	104
6.1.1 Starting the Logger on Linux	104
6.1.2 Starting the Logger in Windows	104
6.1.3 Running the Logger without a GUI	104
6.2. The Logger Window	104
6.2.1 The Timeline	106
6.2.2 Hiding Plug-in Views	106
6.2.3 Docking and Undocking GUI Plug-in Views and Toolbars	107
6.2.4 Saving the Window Layout	107
6.3. Connecting to the Simulation Network	108
6.3.1 Disconnecting from the Simulation Network	108
6.4. Opening Logger Files	108
6.4.1 Upgrading a Logger File's Format	110
6.4.2 Opening Incomplete Files	110
6.4.3 Closing a Logger File	110
6.5. Listening to the Network	111
6.6. Viewing and Editing Logger File Information	111
6.6.1 Displaying Information about a Logger File	111
6.6.2 Editing the Logger File Description	112

7. Recording Logger Files

7.1. Recording Exercises	116
7.1.1 Recording Immediately (to a Temporary File)	116
7.1.2 Recording to a Specified File	116
7.1.3 Recording to Multiple Files	117
7.1.4 Pausing the Recording Process	119
7.1.5 Stopping the Recording Process	119
7.2. Enabling Video Recording	119
7.2.1 Recording Streaming Video from VR-Vantage	120
7.2.2 Recording Streaming Video from a Webcam	120
7.3. Saving Files	121
7.3.1 File Backups	121
7.3.2 Saving a File to a New Name	122
7.3.3 Saving a Portion of a File to a New File	122

8. Playing Logger Files

8.1. Playing Logger Files	124
8.1.1 Playing a Logger File	124
8.1.2 Pausing Playback of a Logger File	124
8.1.3 Looping Playback	124
8.1.4 Stopping Playback of a Logger File	124
8.1.5 Viewing Video	125
8.1.6 Playing a Segment of a File	125
8.1.7 Setting the Playback Speed	126
8.1.8 Using High-Speed Playback	127
8.1.9 Playing a File While Recording It	128
8.2. Zooming the Timeline	128
8.2.1 Zooming the Timeline with the Mouse	129
8.2.2 Setting the Zoom from the Set Zoom Dialog Box	129
8.2.3 Moving the Zoomed Selection	130
8.3. Moving the Timepoint to a Specific Time	130
8.3.1 Jumping to the Beginning or End of the Playback Range	130
8.3.2 Moving to a Specific Time in a File	130
8.3.3 Setting the Time Using the Timeline Cursor	131
8.4. Viewing Packet Histograms	131
8.4.1 Scaling the Packet Count View	132
8.5. Viewing Object Statistics	132
8.6. Viewing Streaming Video Using VLC	133
8.6.1 Reducing Latency in VLC	133
8.7. Playing HLA 1.3 Logger Files in HLA 1516 Federations	135

9. Annotating Logger Files

9.1. Annotating a Logger File	138
9.2. Adding an Annotation	138
9.2.1 Adding an Instant Point Annotation	139
9.2.2 Dynamically Resetting an Annotation's Start or End Time (Update)	140
9.3. Saving an Annotation File	140
9.4. Opening an Annotation File	140
9.5. Importing an Annotation File	141
9.6. Selecting an Annotation	141
9.7. Editing an Annotation	141
9.7.1 Editing a Point Annotation Directly	141
9.7.2 Editing a Range Annotation Directly	141
9.7.3 Converting an Annotation to the Other Annotation Type	141
9.8. Deleting an Annotation	142
9.9. Moving the Timeline Cursor to the Start of an Annotation	142
9.9.1 Moving the Timeline Cursor to the End of an Annotation	142
9.10. Jumping to the Next or Previous Annotation	142
9.11. Zooming the Timeline to an Annotation	142
9.12. Bounding Playback to an Annotation	144

10. Filtering Input and Output

10.1. Filtering Logger Input and Output	146
10.2. Filtering by Entity Type	146
10.2.1 Removing Entity Types from the Entity Types Lists	147
10.2.2 Configuring the List of Common Entity Types	147
10.3. Filtering DIS PDUs by PDU Kind	147
10.4. Including Custom PDUs in Filter Lists	148
10.5. Filtering DIS Messages by Entity ID	149
10.6. Filtering HLA Messages by Object Name	150
10.7. Filtering HLA Exercises by Class	152
10.8. Filtering by Marking Text	152
10.9. Filtering VR-Forces Messages	153

11. Analyzing HLA Data

11.1. The HLA Traffic Analyzer	156
11.1.1 Showing or Hiding the HLA Traffic Analyzer	156
11.2. Traffic Analyzer Data Views	156
11.2.1 Hiding the Attributes Pane	157
11.3. How the Traffic Analyzer Evaluates Data	157
11.3.1 Representing Complex Datatypes	158
11.3.2 Datatype Representations Included in the Traffic Analyzer	158

11.4. Viewing Object and Interaction Classes and Attributes	159
11.4.1 Viewing the Attributes of an Object Class	159
11.4.2 Viewing the Parameters of an Interaction Class	159
11.5. Viewing Object Instances	160
11.6. Viewing Interaction Instances	161
11.7. Configuring the HLA Traffic Analyzer	162
11.7.1 Changing the Data Delimiter	163
11.7.2 Mapping Datatypes	163
11.7.3 Configuring Attribute Display Options	164
11.7.4 Mapping Entity Type Enumerations to Strings	165
11.7.5 Removing Brackets from the Display of Array Types	165

12. Editing Logger Files

12.1. Editing Files	168
12.1.1 Reverting to the Saved Version of a File	168
12.2. Clearing and Deleting Segments of a File	168
12.3. Merging Files	170
12.4. Concatenating Files	170
12.5. Trimming Files	170
12.6. Offsetting Files	171

13. Exporting Logger Data

13.1. Exporting Data	174
13.1.1 ODBC Driver Support	174
13.2. Understanding Exported Data	175
13.3. Exporting Data to a Database	176
Notes	176
13.3.1 Configuring an ODBC Data Source	179
13.3.2 Exporting DIS Data to a Database	179
13.3.3 Exporting HLA Data to a Database	180
13.3.4 The Export Log	180
13.4. Configuring a Data Source for Microsoft Access	180
13.5. Installing MySQL and Configuring a Data Source	183
13.5.1 Installing MySQL and the MySQL ODBC Driver	183
13.5.2 Creating a MySQL Database	184
13.5.3 Configuring a Data Source for MySQL	184
13.6. Exporting Data on Linux	186
13.6.1 Install the ODBC Driver	186
13.6.2 Install MySQL	186
13.6.3 Install and Set Up MySQL	186
13.6.4 Run MAK Data Logger	187
13.7. Importing Logger Data into a Spreadsheet	187

13.7.1 Importing Data from MySQL to Microsoft Excel	187
13.7.2 Importing Data from Access to Excel	190

14. Using Logger Commands

14.1. Using Logger Commands on the Command Line	194
14.2. Using Logger Commands in the Configuration File	195
14.3. Using Logger Commands in the Text Interface	195
14.3.1 Entering Commands	195
14.3.2 Displaying a List of Commands	196
14.4. Command Descriptions	196
14.4.1 Argument Types	196
14.4.2 System Domain Commands	197
14.4.3 Player Domain Commands	198
14.4.4 Recorder Domain Commands	200
14.4.5 Simulation Domain Commands	202
14.4.6 Editor Domain Commands	212
14.5. Command List	214

15. Using the Logger Remote Control

15.1. The Logger Remote Control	218
15.2. Configuring Loggers to be Controlled Remotely	218
15.3. Starting the Logger Remote Control	218
15.4. Recording Exercises with the Logger Remote Control	219
15.5. Playing Exercises with the Logger Remote Control	220
15.6. Configuring the Logger Remote Control Connection	221
15.7. Specifying the Refresh Rate	222
15.8. Setting the Timebar Color	222
15.9. Exiting the Logger Remote Control and Connected Loggers	223
15.10. Logger Remote Control Command-line Options	223

A. Troubleshooting

A.1. Troubleshooting Logger Network Communications (DIS Only)	226
A.1.1 Using the Correct Broadcast Address and UDP Port	226
A.2. Playing HLA 1.3 Logger Files in HLA 1516 Federations	226
A.3. Playing DIS Files with VR-Forces Embarkation	227
A.4. Using Older MAK RTIs with HLA 1516	227

B. FED File Naming Conventions

B.1. FED File Naming Conventions	230
B.2. FED File Mappings	230

MAK Products Glossary 233

Index 245

MAK Data Logger Quick Reference Card 265



Preface

The MAK Data Logger (Logger) records network activity of HLA or DIS exercises and plays it back for review. The Logger has a graphical user interface, a text interface, and an API.

This manual is for persons who will install the Logger, for persons who will record or play back simulations, and for persons who will develop plug-ins or applications using the Logger APIs. It assumes that you are familiar with your operating system.

Consult the *MAK Data Logger Release Notes* for your version of the Logger for release-specific information and updates that occurred after this manual went to press.

3.1. How the Manual is Organized

The manual is organized as follows:

"Chapter 1. Introduction" on page 25 describes the Logger's features.

"Chapter 2. Installing the Logger" on page 33 explains how to install the Logger and related software such as the FLEXlm license manager and an RTI.

"Chapter 3. Logger Concepts" on page 47 provides an overview of what the Logger does.

"Chapter 4. Configuring the Logger Connection" on page 55 explains how to configure the Logger for use with either the HLA or the DIS protocol.

"Chapter 5. Configuring the Logger" on page 77 describes how to configure the Logger for faster performance, how to configure HLA DDM, and how to edit the Logger configuration file.

"Chapter 6. Starting the Logger" on page 103 explains how to start the Logger, connect to an exercise, and open Logger files.

"Chapter 7. Recording Logger Files" on page 115 shows how to record network traffic and save the recordings.

"Chapter 8. Playing Logger Files" on page 123 shows how to play Logger files.

"Chapter 9. Annotating Logger Files" on page 137 explains how to create and edit annotations in Logger files.

"Chapter 10. Filtering Input and Output" on page 145 explains how to use the Logger's filtering capabilities to limit the messages being sent or received.

"Chapter 11. Analyzing HLA Data" on page 155 explains how to use the HLA Traffic Analyzer to understand the HLA data that the Logger is receiving or sending.

"Chapter 12. Editing Logger Files" on page 167 explains how to edit Logger files, including cutting segments, inserting files, and offsetting packet timestamps.

"Chapter 13. Exporting Logger Data" on page 173 explains how to export Logger files to other formats, such as text, and to MySQL or Microsoft Access databases.

"Chapter 14. Using Logger Commands" on page 193 explains how to execute Logger commands from the command line, from a console window, and from the configuration file.

"Chapter 15. Using the Logger Remote Control" on page 217 explains how to use the Remote Control Logger to control multiple Loggers from one location.

"Appendix A. Troubleshooting" on page 225 explains how to correct network problems that may prevent the Logger from communicating properly.

"Appendix B. FED File Naming Conventions" on page 229 maps old FED file names to current FED file names.

The "MAK Products Glossary" on page 233 defines terms used in the manual.

The "MAK Data Logger Quick Reference Card" on page 265 lists command-line options, keyboard shortcuts, and the commands that you can use with the command-line interface.

Logger Documentation

Logger documentation is provided as manuals in PDF format, online help, and class documentation. Electronic versions of the documentation are in *makLogger/doc*. On Windows, you can access the documentation from the Logger folder on the Start menu. You can also find the most current documentation on the [Product Specifications & Dependencies](#) page for the Logger at <https://www.mak.com/mak-one-specs>. The Logger documentation set includes:

- *MAK Data Logger First Experience Guide* introduces the Logger by walking you through some simple exercises.
- *MAK Data Logger Users Guide* describes how to install and use the Logger.
- API documentation and a class reference based on the header files is provided in HTML format.
- HTML5 help. The help, accessible from the Help menu, replicates most of the information in the *MAK Data Logger Users Guide*.
- *MAK Products Interoperability Guide* describes general issues of HLA and DIS interoperability and specific issues for running MAK products together.
- *MAK Data Logger Release Notes* lists system requirements, release-specific requirements, new features and updates, bug fixes, and known problems.

Try the Help

MAK's HTML5 help is the best way to use our documentation. It's easy to navigate, with improved natural language search tools and filters to focus your search. You can click the illustrations to see high-resolution enlargements that show more detail. It's built into the product and installed locally — simply press **F1** to launch the help in your browser. You do not need to be connected to the internet to use it.

 If you attempt to view the help in a browser that does not fully support HTML5, you may experience issues with some features.

MAK Products

The MAK Technologies product line includes:

- VR-Link® Network Toolkit. VR-Link is an object-oriented library of C++ functions and definitions that implement the High Level Architecture (HLA) and the Distributed Interactive Simulation (DIS) protocol. VR-Link has built-in support for the NETN FOM and RPR FOM and allows you to map to other FOMs. This library minimizes the time and effort required to build and maintain new HLA or DIS-compliant applications, and to integrate such compliance into existing applications.

VR-Link includes a set of sample debugging applications and their source code. The source code serves as an example of how to use the VR-Link Toolkit to write applications. The executables provide valuable debugging services such as generating a predictable stream of HLA or DIS messages, and displaying the contents of messages transmitted on the network.

- **MAK RTI.** An RTI (Run-Time Infrastructure) is required to run applications using the High Level Architecture (HLA). The MAK RTI is optimized for high performance. It has an API, RTIsPy®, that allows you to extend the RTI using plug-in modules. It also has a graphical user interface (the RTI Assistant) that helps users with configuration tasks and managing federates and federations.
- **VR-Forces®.** VR-Forces is a computer generated forces application and toolkit. It provides an application with a GUI, that gives you 2D and 3D views of a simulated environment.

You can create and view entities, aggregate them into hierarchical units, assign tasks, set state parameters, and create plans that have tasks, set statements, and conditional statements. You can simulate using entity-level modeling, which focuses on the actions of individual people and vehicles, and aggregate-level modeling, which focuses on the interaction of large hierarchical units.

VR-Forces also functions as a plan view display for viewing remote simulation objects taking part in an exercise. Using the toolkit, you can extend the VR-Forces application or create your own application for use with another user interface.

- **VR-Vantage™.** VR-Vantage is a line of products designed to meet your simulation visualization needs. It includes VR-Vantage and the VR-Vantage Toolkit.
 - VR-Vantage displays a realistic, 3D view of your virtual world, a 2D plan view, and an exaggerated reality (XR) view. Together these views provide both situational awareness and the big picture of the simulated world. You can move your viewpoint to any location in the 3D world and can attach it to simulation objects so that it moves as they do.
 - **SensorFX.** SensorFX is an enhanced version of VR-Vantage that uses physics-based sensors to view terrain and simulation object models that have been materially classified. It is built in partnership with JRM Technologies.
 - The VR-Vantage Toolkit is a 3D visual application development toolkit. Use it to customize or extend MAK's VR-Vantage applications, or to integrate VR-Vantage capabilities into your custom applications. VR-Vantage is built on top of OpenSceneGraph (OSG). The toolkit includes the OSG version used to build VR-Vantage.
- **MAK Data Logger.** The Data Logger, also called the Logger, can record HLA and DIS exercises and play them back for after-action review. You can play a recorded file at speeds above or below normal and can quickly jump to areas of interest. The Logger has a GUI and a text interface. The Logger API allows you to extend the Logger using plug-in modules or embed the Logger into your own application. The Logger editing features let you merge, trim, and offset Logger recordings.
- **VR-Exchange™.** VR-Exchange allows simulations that use incompatible communications protocols to interoperate. For example, within the HLA world, using VR-Exchange, federations using the HLA RPR FOM 1.0 can interoperate with simulations using RPR FOM 2.0, or federations using different RTIs can interoperate. VR-Exchange supports HLA, TENA, and DIS translation.

- **VR-TheWorld™.** VR-TheWorld is a simple, yet powerful, web-based streaming terrain server, developed in conjunction with Pelican Mapping. Delivered with a global base map, you can also easily populate it with your own custom source data through a web-based interface. The server can be deployed on private, classified networks to provide streaming terrain data to a variety of simulation and visualization applications behind your firewall.
- **DI-Guy™.** DI-Guy is an SDK that allows you to embed the DI-Guy library in your real-time application and populate your world with lifelike human characters. DI-Guy provides high-fidelity human characters that move realistically, respond to simple high-level commands, and travel throughout the environment as directed by the hosting visual application. It comes with thousands of ready-to-use characters, appearances, and motions. DI-Guy character simulation is an integral part of all MAK's visual applications, including VR-Engage, VR-Forces, and VR-Vantage.
- **RadarFX.** RadarFX is a client-server application that simulates synthetic-aperture radar (SAR). The server application, which is based on VR-Vantage and SensorFX, loads a terrain database and, optionally, connects to simulations. A client application requests SAR images from the server. RadarFX includes a sample client application.
- **VR-Engage.** VR-Engage is a multi-role virtual simulator that lets users play the role of a first person human character, a ground vehicle driver, gunner or commander, a sensor operator, or the pilot of a fixed wing aircraft or helicopter. It incorporates the VR-Force simulation engine and the VR-Vantage graphics rendering capabilities.
- **WebLVC Server.** WebLVC Server implements the server side of the WebLVC protocol so that web-based simulation federates can participate in a distributed simulation. It is part of the WebLVC Suite, which includes the server and several sample applications that work with VR-Forces and VR-Vantage.
- **MAK Legion.** MAK Legion is a collection of applications and an SDK designed to support simulations with millions of simulation objects.

How to Contact Us

For technical support, information about upgrades, and information about other MAK products, you can contact us in the following ways:

Telephone

Call or fax us at:	Voice:	617-876-8085
	Fax:	617-876-9208

E-mail

Sales and upgrade information:	info@mak.com
Technical support:	support@mak.com

Internet

MAK website home page:	www.mak.com
License key requests:	www.mak.com/support/get-licenses

Technical support: www.mak.com/mak-one/support/portal
Product version and platform information: www.mak.com/support/product-versions
For the free, unlicensed MAK RTI: www.mak.com/support/bonus-material

Post

Send postal correspondence to: MAK Technologies
10 Fawcett Street, Suite 204
Cambridge, MA 02138 USA

When requesting support, tell us the product you are using, the version, and the platform on which you are running. If you are using VR-Vantage, VR-Forces, VR-Engage, or DI-Guy, please also include your data compatibility version and date.

Document Conventions

This manual uses these typographic conventions:

Sans Serif Bold	Indicates a key on the keyboard or menu options. Mentions of letter keys do not require you to press the Shift key. If Shift is necessary, that will be included, for example, Shift+Q . Also indicates parameters.
Monospaced	Indicates values you enter such as commands or arguments.
<i>Monospaced</i>	Indicates command variables that you replace with appropriate values.
<i>Italic</i>	
{ }	Indicates required arguments.
[]	Indicates optional arguments.
	Separates options in a command where only one option may be chosen at a time.
()	In command syntax, indicates equivalent alternatives for a command-line option, for example, (-h --help).
/	Indicates a directory. Since MAK products run on both Linux and Windows PC platforms, we use the / (slash) for generic discussions of pathnames.
<i>Italic</i>	Indicates a file name, pathname, or a class name.
►	Indicates a procedure.
Menu > Option	Indicates a menu choice. For example, an instruction to select the Save option from the File menu appears as: Choose File > Save .
	Indicates supplemental or clarifying information.
	Indicates additional information that you must observe to ensure the success of a procedure or other task.

Directory names are preceded with dot and slash characters that show their position with respect to the Logger home directory. For example, the directory *./makLogger5.11.1/doc* appears in the text as *./doc*.

Mouse Button Naming Conventions

An instruction to click the mouse button refers to clicking the primary mouse button, usually the left button for right-handed mice and the right button for left-handed mice. The context-sensitive menu, also called a popup menu or right-click menu, refers to the menu displayed when you click the secondary mouse button, usually the right button on right-handed mice and the left button on left-handed mice.

Third-Party Licenses

MAK software products may use code from third parties. This section contains summary license information and, where required, specific license documentation required by these third parties.

Third-Party Libraries Supported

Logger 5.11.1 uses the indicated versions of these libraries:

- VR-Link 5.9.1
- Qt 5.15.2 (VC 15 and Red Hat 8)
- OpenSceneGraph 3.6.4
- Boost 1.63.0
- FreeGlut 2.4.0 (Windows), 2.6.0 (Linux)
- GL Studio 8.2
- DI-Guy 13.7 (development version)
- Triton 4.43
- SilverLining 6.20
- SpeedTree 6.3.2
- CDB API 2.2 (Windows), 2.1 (Linux)
- osgEarth 3.2
- CUDA 11.7

Library Licensing

These libraries are covered by the GNU Lesser General Public License (LGPL) license:

- CIGI
- DevIL
- GEOS
- GStreamer
- LibIconV
- LibWebSockets
- OPCODE
- OpenAL
- OSG
- OsgEarth
- Pthread
- Qt
- Qwt

These libraries are covered by the ZLib license:

- Bullet Physics
- LibPNG
- LibSDL
- Minizip
- Zlib

These libraries are covered by the MIT license:

- Expat
- FreeGLUT
- GDAL
- GeoTIFF
- GLM
- HarfBuzz
- LibCURL
- LibSquish
- LibXML
- LUA
- LuaBind
- Proj
- SMHasher
- TCLAP
- Qt Visual Graph Editor
- ZeroBrane Studio

These libraries are covered by the BSD license:

- FreeType
- GLEW
- JPEG
- LibTiff
- Protobuf
- PCRE
- Ogg Vorbis
- WebP

These libraries are covered by the commercial licenses:

- FLEXlm
- Gameware
- GLStudio
- JRM Technologies SenSimRT and SigSimRT
- OpenFlight
- SpeedTree
- Sundog Triton
- Sundog SilverLining
- CDB API

These libraries are covered by custom licenses:

- NVIDIA CG Toolkit
- FreeImage (FreeImage Public License)
- Boost (Boost Software License)
- Poco (Boost Software License)

COLLADA DOM is covered by the SCEA Shared Source license.

Thread Building Blocks is covered by the GPL license:

SQLite is in the public domain.

SWIG is covered by the GPL license.

Boost License

VR-Link, and all MAK ONE products that use VR-Link, uses some code that is distributed under the Boost License. All header files that contain Boost code are properly attributed. The Boost website is: www.boost.org.

Boost Software License - Version 1.63 - August 17th, 2003

Permission is hereby granted, free of charge, to any person or organization obtaining a copy of the software and accompanying documentation covered by this license (the “Software”) to use, reproduce, display, distribute, execute, and transmit the Software, and to prepare derivative works of the Software, and to permit third parties to whom the Software is furnished to do so, all subject to the following:

The copyright notices in the Software and this entire statement, including the above license grant, this restriction and the following disclaimer, must be included in all copies of the Software, in whole or in part, and all derivative works of the Software, unless such copies or derivative works are solely in the form of machine-executable object code generated by a source language processor.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE

LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

libXML and libICONV

VR-Link, and all MAK ONE products that use VR-Link, links in libXML and libICONV. On some platforms the compiled libraries and header files are distributed with MAK products. MAK has made no modifications to these libraries. For more information about these libraries, see the following websites:

- The LGPL license is available at: <http://www.gnu.org/licenses/lgpl.html>.
- Information about IconV is at: <http://www.gnu.org/software/libiconv>.
- Information about LibXML is at: <http://xmlsoft.org>.



1. Introduction

This chapter describes the basic features of the Logger.

1.1. Logger Features	26
1.1.1 Logger Interfaces	26
1.1.2 Filtering	27
1.1.3 Annotations	27
1.1.4 Editing	27
1.1.5 Streaming Video	27
1.1.6 Data Export	28
1.1.7 HLA Traffic Analyzer	28
1.1.8 The Remote Control Logger	28
1.1.9 Sample Logger Files	28
1.1.10 Sample Programs	30
1.2. Distributed Simulation Standards Supported	30
1.2.1 RTI Support	30
1.2.2 FOM Support	30

1.1. Logger Features

The Logger records network activity of HLA and DIS exercises¹ and plays it back for review.

DIS Only

In record mode, the Logger monitors all DIS traffic on a specified UDP port and stores it in a file. In playback mode, the Logger transmits DIS data packets stored in a Logger file. When the playback scale is less than or greater than 1.0, the Logger scales the dynamic quantities stored in the PDUs, such as velocity, acceleration, and so on.

HLA Only

The HLA version of the Logger performs recording and playback while acting as a separate federate. In record mode, by default, it subscribes to all objects, attributes, and interactions in the RPR FOM, and records updates, interactions, and object removals that it perceives through the RTI. It records values for all published attributes of an object by requesting attribute updates as it discovers each new object.

In playback mode, the HLA Logger acts as a federate that owns each of the objects for which updates appear in the file. The Logger sends interactions and updates only for classes that other federates are subscribed to. The Logger serves as a proxy simulator, answering requests for attribute updates and making objectRemove RTI calls when it encounters removals in the recorded file. In addition, just as in DIS, velocities, accelerations, and angular velocities are scaled in outgoing messages when the Logger's time scale is not equal to zero.

If possible, the Logger uses the same object names as those used in the original simulation. If this is not possible, for example, if another federate is using the name, the Logger lets the RTI assign a name for the object in question.

1.1.1 Logger Interfaces

There are options for how you use the Logger:

- A graphical user interface (GUI).
- A text-based interface.
- A remote control interface.
- APIs that let you control the Logger through plug-ins, external applications, or over a network.

¹The HLA counterpart to a DIS exercise is a federation execution. For simplicity, we use the term exercise to represent both.

These interfaces have nearly identical capabilities. (Some features are only available through the GUI; others through the Logger API.) Common features include:

- Start, stop, or pause when playing a file.
- Navigate to a specific time-point when playing a file.
- Control playback speed and direction.
- Load a specific file for playback.

You can use all the interfaces at the same time.

Localization

The Logger includes translation files that allow you to localize the Logger's GUI. See "2.5. Localizing the Graphical User Interface" on page 43 for details.

1.1.2 Filtering

You can filter the messages that the Logger records and sends to reduce network traffic or focus on a particular set of objects or interactions. In HLA, you can specify which classes you want to subscribe to. For details, see "Chapter 10. Filtering Input and Output" on page 145.

1.1.3 Annotations

You can annotate Logger files. Point annotations identify a specific time in a file. Range annotations identify a segment of a file. You can easily zoom the display to a range annotation and can bind the playback segment to a range annotation. For details, see "Chapter 9. Annotating Logger Files" on page 137.

1.1.4 Editing

The Logger lets you easily edit Logger files. It supports the following types of edits:

- Merge files.
- Concatenate files.
- Clear or delete a segment of a file.
- Trim dead space at the beginning of a file.
- Offset the timestamps of the packets in a file.

For details, see "Chapter 12. Editing Logger Files" on page 167.

1.1.5 Streaming Video

The Logger can record or play a video stream file while synchronously recording or playing a recording of the related simulation exercise traffic.

The video stream can be captured from the network and saved to a separate video file. The video stream can come from VR-Vantage, a webcam, an external live camera, or from any source generating a stream over the network. For details, see "7.1. Recording Exercises" on page 116.

The video file can be played back to an embedded video window, much like using VLC or another media player. The video file can also be streamed back onto the network. If you have an application that was reading video stream data during the exercise, it will now be able to read the same data when the Logger is playing back the exercise. The video playback will be synchronized to the Logger data stream. So if you are playing back your exercise at 2x speed, the video playback speeds up as well. Similarly, if you jump to a specific point in time, both the video and the simulation data jump to that location. For details, see "7.2. Enabling Video Recording" on page 119 and "8.1.5 Viewing Video" on page 125.

1.1.6 Data Export

The Logger can export data to these formats:

- Text.
- Logger file.
- MySQL database using ODBC driver.
- Microsoft Access database using ODBC driver.

For details, see "Chapter 13. Exporting Logger Data" on page 173.

Developers can add additional export formats using the Logger API.

1.1.7 HLA Traffic Analyzer

The HLA Traffic Analyzer provides details about the FOM you are using and displays the data for the current known object instances and recent interactions. By examining the classes, you can debug problems that you are experiencing in your federation, such as an entity's location not being within the area for the scenario or an interaction missing parameter values.

1.1.8 The Remote Control Logger

The Remote Control Logger lets you control one or more Loggers from one location. You can record data and play it back from the Remote Control Logger. The primary use for the Remote Control Logger is to provide one point of control when you are using multiple Loggers to record a large exercise.

The Remote Control Logger is protocol-independent. It can control DIS Loggers, HLA Loggers, or both.

1.1.9 Sample Logger Files

The Logger includes several sample files. The files names indicate which protocol they support, such as DIS or HLAe (HLA Evolved). For tapes that support HLAe, the file name also indicates the version of the RPR FOM.

- *bombMission2024*. (DIS, HLAe) The mission is to drop a bomb on a high priority target on the island of Oahu, Hawaii. To accomplish the mission, several F-16 decoys are used to distract enemy forces while a B-2 drops a high altitude JDAM on the primary target.

- *FollowSuspect-2024*. (DIS, HLAe) This scenario follows human suspects through a section of Honolulu, Hawaii. The suspect moves through the scenario using various vehicles and retrieves a weapon while an overhead UAV tracks the events.
- *hawaiiNaval2016*. (DIS) This scenario demonstrates naval warfare capabilities of VR-Forces in six separate vignettes:
 - Mine clearing.
 - Naval gunfire.
 - Sonar and sonobuoys.
 - Submarine maneuvers.
 - Ballistic missiles.
 - Ship-ship engagement.
- *HawaiiTour2019*. (DIS, HLAe) The Hawaii Tour scenario showcases a helicopter flying around the island of Oahu.
- *ProceduralEarth-MtRainier2015*. (DIS) Several different recordings demonstrate MAK Technologies's procedural terrains. Terrain to load with: ProceduralEarth.
- *Raid2021, Raid2024, Raid-SFX-ViewControl-DIS*. (DIS, HLAe) This scenario simulates a warehouse raid in Honolulu, Hawaii. Soldiers approach the raid location by helicopter and boat. They disembark, and four two-man teams move through cover to the doors of the warehouse, while the rest of the soldiers stay back to cover the approach. After the soldiers disembark, the helicopters leave and fly a route nearby, waiting for the signal to come back. One version has view controls. Another version is designed for use with SensorFX.
- *rhoneValleyTour-2019*. (DIS) The Rhone Valley Tour scenario showcases two small aircraft flying around the valley.
- *SouthernCaliforniaFlythrough-2024*. (DIS) Shows an aircraft flying over the southern region of California.
- *SwissFlyThrough-2024*. (DIS) Shows an aircraft flying through a valley in Switzerland.
- *VehicleLights2015-DIS*. Demonstrates lighting effects and lights cast by a HMMWV on the Hawaii terrain.
- *VR-Engage_FirstExperienceDIS*. This is a webcam recording of some engineers going through the First Experience scenario for VR-Engage 1.3.
- *VR-TheWorld_FirstExperience*. (DIS). This recording is for use with *VR-TheWorld First Experience Guide*.

 Some of these files contain View Control messages, which cause MAK's 3D visualization products to follow the action automatically, switching among many predetermined viewpoints. For information about manually controlling the eyepoint in this demo, please see the 3D product documentation.

1.1.10 Sample Programs

The Logger includes some example programs:

- Simple examples of using the Logger API — `playFile`, `readFile`, `recordFile`, `writeFile`, and `exportFileToDatabase`. Compiled versions of these examples are provided in the `./bin64` directory.
- Example plug-ins — `stateObserver` displays a graph of object statistics. `lgrDump` prints details of each packet to the console. `sampleFilter` shows how to filter out selected packets. Look for these in the `./examples` directory.
- An example Logger application — `loggerApp`. You can use this example as a starting point for changing and recompiling the Logger application. It is also in the `./examples` directory.
- A remote control application — `lgrControl`. Compiled versions of the example are provided in the `./bin64` directory.
- A DDM example — `sampleDdm` in the `./examples` directory shows how to manipulate DDM regions using packet data.
- `lgrModSqlExporter` — An example that extends the database export to include the DIS Data PDU. This is also in the `./examples` directory.
- `matrexTspiFomMapper` — A VR-Link FOM Mapper for the entity attributes of the MATREX FOM for Time and Space Position Information. This is also in the `./examples` directory.

For more information about these and other examples, see the Examples page in the online API documentation.

1.2. Distributed Simulation Standards Supported

The Logger has built-in support for DIS and the HLA RPR FOM. Please see release documentation for a list of DIS versions, RPR FOM versions, and RTI versions supported by your release of the Logger.

1.2.1 RTI Support

The Logger supports the HLA RTI 1.3 specification, the IEEE 1516 specification (SISO Dynamic Link Compatibility HLA API <http://www.sisostds.org/index.cfm>), and HLA Evolved (IEEE 1516-2010). The SISO 1516 API is an alternative mapping of the IEEE 1516 specification to C++. It supports dynamic link compatibility between different RTI implementations.

1.2.2 FOM Support

The Logger provides native support for several versions of the RPR FOM: 0.5, 0.7, 0.8, 1.0, 2.0 drafts 6, 14, 17, and 20, and RPR FOM 2.0 final version. It also supports VR-Link's ability to support alternative FOMs through the FOM Mapper. By default, Logger 5.10 uses RPR FOM 2.0.

The Logger comes with FED files for HLA 1.3, HLA 1516, and HLA Evolved. The default FED file for HLA 1.3 is *MAK-RPR2-1-10.fed*, which contains all of the RPR FOM 2.0 objects and interactions. For HLA 1516, the Logger uses *MAK-RPR2-1-10.xml*. By default, the Logger joins the federation execution called VR-Link and uses this FED file, which is distributed with the Logger, and with other MAK tools.

The HLA Evolved version of the Logger uses *RPR_FOM_v2.0_1516-2010.xml* with the desired extensions (*MAK-DIGuy-7_evolved.xml*, *MAK-LgrControl-1_evolved.xml*, *MAK-VRFExt-1_evolved.xml*).

The NETN FOM is also supported for HLA Evolved. It is an extension of RPR FOM 2.0.

Using FOMs other than the RPR FOM

For simple recording and playback, the Logger can use any FOM. If you want to use advanced Logger features with FOMs other than the RPR FOM, you can write a VR-Link FOM mapper to provide the information necessary to properly map between VR-Link's internal object model and your FOM. Please see the *VR-Link Developer's Guide* for complete details about creating FOM mappers.



2. Installing the Logger

This chapter explains how to install the Logger and related software.

2.1. Installing MAK Data Logger	34
2.1.1 Installation and Data Packages	34
2.1.2 Installing the Logger on Windows	34
2.1.3 Installing the Logger on Linux Systems	35
2.1.4 Installing Logger PDB Files for Debugging Purposes	35
2.1.5 Required Software for Toolkit Users	37
2.1.6 ODBC Driver Support	37
2.1.7 Uninstalling from Windows	37
2.1.8 Uninstalling from Linux	38
2.2. The Logger Directory Structure	38
2.3. Installing and Setting Up the MAK License Manager	39
2.3.1 Specifying the License Server	39
2.4. Installing an RTI	41
2.4.1 Installing the MAK RTI	42
2.5. Localizing the Graphical User Interface	43
2.5.1 Translating Other Interface Files	45
2.5.2 Applying the Language Files	45

2.1. Installing MAK Data Logger

2.1.1 Installation and Data Packages

MAK ONE installations are provided in one or more files (packages) that you can download from the MAK website.

There are four types of installation products for MAK ONE:

- Product installers – Each product has a single main installer for each operating system.
- Optional installers – Some products have installers for developer options.
- Required data packages – MAK ONE applications (VR-Vantage, VR-Forces, VR-Engage, SensorFX, and RadarFX) and the DI-Guy SDK have a collection of data packages that are required for those products' basic functions.
- Recommended data packages – Additional data packages (if available) are recommended to access the full capabilities of MAK ONE applications.

As of spring 2022, new releases of MAK ONE applications share the same data installation, therefore the same set of data packages is all you need for any or all applications (VR-Vantage, VR-Forces, VR-Engage, SensorFX, and RadarFX).

Dependencies

Licensing tools and dependent products have their own installers. For details, see "2.3. Installing and Setting Up the MAK License Manager" on page 39.

For interoperability using HLA, see "2.4. Installing an RTI" on page 41.

Before you install the MAK Data Logger, please read the release notes to see if there are any special instructions for installation.

2.1.2 Installing the Logger on Windows

Windows versions of the Logger are provided as downloaded files.

- To install the Logger, run the installer. Follow the instructions in the installation wizard.

Note the following:

- The installers are named to indicate the compiler used to build that version of the Logger.
- When you install large applications on Windows, there may be a delay of up to several minutes from the time you try to run the setup program to the time that an installation dialog box displays. This is due to how Windows scans setup programs before it executes them. If you experience this problem, turning off User Access Control can reduce or eliminate this delay.

Default Windows Installation Directory

The default root directory for installing MAK ONE products is *C:/MAK*.

You can use an environment variable, `MAK_INSTALL_DIR`, to specify a different location where all MAK ONE products and data should be installed by default. For example, if you define it as `MAK_INSTALL_DIR = D:\MyProject`, then all MAK ONE products automatically install to that location. The data packages and products would then install in that directory by default: `D:/MyProject/SharedData`, `D:/MyProject/vrlink5.9.1`, and so on.

2.1.3 Installing the Logger on Linux Systems

Linux versions of the Logger are provided as compressed TAR files.

► **To install a product from a TAR file:**

1. Create the directory in which you want to install the product.
2. Copy the tar file to the install directory.
3. Uncompress and untar the tar file:

```
tar -xzf applicationxx-os.tar.gz
```

where `xx-os` is the release, operating system, and other product release coding.

2.1.4 Installing Logger PDB Files for Debugging Purposes

When a MAK ONE application crashes, it can be difficult to determine the cause of the crash. The application generates a `.dmp` file that contains valuable information about the state of the application at the time of the crash. MAK technical support can analyze this file to help diagnose the issue.

In addition, with the application's PDB (program database) files, the application is able to generate a call stack log file (`.callstack.log`) of the application at the time of the crash. The call stack log provides information in plain text about the sequence of functions that were called leading up to the crash, which is also helpful in identifying the specific cause.

By providing the `.dmp` or `.callstack.log` files to technical support, you help support personnel to resolve the issues. They use specialized debugging tools to analyze the files and determine the cause of the crash, and that information aids in the development of a solution to prevent future crashes.

Due to security reasons or organization policies, some customers cannot send the `.dmp` file to technical support. Because the call stack log file is a plain text file, it is easier to inspect and analyze than the `.dmp` file. Users can easily attach it to an email and pass it out of secure areas with visual inspection, making it a convenient option for customers with restrictions on sharing binary files.

It is important to note that the call stack log file alone might not be sufficient for support personnel to fully diagnose the issue. They may require more information to gain a complete understanding of the issue. A detailed procedure for reproducing the crash often helps them solve the problem you encountered.

- Support for the generation of the call stack log file was introduced in MAK ONE 2024. It is supported only in MAK ONE products part of that release and later versions.
- The PDB files are part of the Linux installation. You do not need to install them separately.

Installing PDB Files on Windows

Before installing the PDB files on Windows, you must install the Logger. Next, make sure that the PDB files you are installing are from the same build as the application. When you download the installer from the [MAK ONE Product Downloads](#) page, the appropriate PDB installer is also available for download.

► To install the PDB files:


1. After installing the Logger, run the PDB installer for that product.
2. The installer looks for the matching product directory by searching the registry and then it automatically sets the install directory to the appropriate path. If that is not correct for your product, see the note below.
3. Complete the installation wizard. The necessary PDB files are installed in the product's `./bin64` directory.

- The default installation directory is `C:\MAK`. See "Default Windows Installation Directory" on page 34 to learn about setting the default to other locations.
- Be sure that the folder in the Select Destination Location page of the installation wizard is correct. It should be the top-level folder for the product installation.
- If the PDB installer displays a warning that the SVN revisions do not match, make sure that you have the correct PDB installer for the version of Logger that you installed.

Reporting an Issue Using the `.callstack.log` and `.dmp` Files

Send the `.callstack.log` and `.dmp` files (or only the `.callstack.log` if you are unable to provide the `.dmp` file) to MAK support through the Support Portal (<https://www.mak.com/support>) or support@mak.com. The files will have similar names and are located in the central directory for MAK ONE log files (Figure 1). Please also provide information on anything you experienced when the issue occurred.

Figure 1. Example of `.callstack.log` and `.dmp` files for VR-Forces

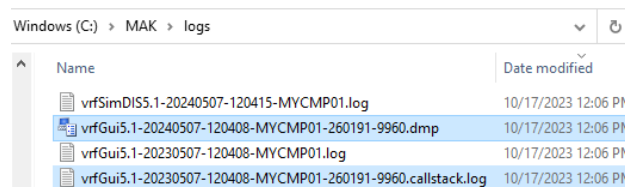

① The default directory for MAK ONE log files is *C:/MAK/logs*. You can customize the location by specifying a different path in the *MAK_LOG_DIR* environment variable.

2.1.5 Required Software for Toolkit Users

The Logger GUI is built using the Qt Toolkit, a cross-platform GUI toolkit. Logger 5.11.1 uses Qt 5.15.2 (VC14 and Red Hat 8). You do not need Qt to do development that does not affect the GUI. If you plan to build the Logger GUI, you must download and install the appropriate version. You can download it at: <https://www.mak.com/mak-one/support/help/bonus-material>.

Qt is also available as a free download under the LGPL version 2.1 license at <https://www.qt.io>. This version should be satisfactory for most Logger customers. If you need a Qt commercial license, you must purchase the license from Qt.

2.1.6 ODBC Driver Support

The Logger database export feature supports these ODBC drivers:

- MySQL ODBC 2.50 Driver
- MySQL ODBC 5.351 Driver
- MySQL ODBC 5.1 Driver
- MySQL ODBC 5.2w Driver
- Microsoft Access

A 64-bit connector is required.

You can download the MySQL 5.1 server and connector at:

- server: <https://dev.mysql.com/downloads/file/?id=411970>
- connector: <https://dev.mysql.com/downloads/file/?id=411736>

2.1.7 Uninstalling from Windows

MAK ONE product installations include an uninstaller application (*unins000.exe*), which you can find in the installation directory. Run that program to uninstall the product.

When you run other installers for the product, such as the PDBs, there are additional uninstallers. If you run the uninstallers from the highest number down (for example, *unins002.exe* and then *unins001.exe*), running *unins000.exe* uninstalls everything else and removes the install folder.

When you uninstall VR-Vantage, VR-Forces, or VR-Engage, files such as scenarios or SMSs that reside in the product directory are also deleted. Before uninstalling, copy any of your custom files from the product directory to another folder.

The uninstaller does not remove the data package. That is in a separate directory (for example, *./SharedData/18/latest*).

i If you run only the product uninstaller, you can then simply delete the rest of the product's install folder. Note that if you do not run all of the uninstallers, running only the product uninstaller may not remove all of the shortcuts from the Windows Start menu.

2.1.8 Uninstalling from Linux

To remove installations from Linux machines, simply delete the installation directory. This catches all of the files associated with the product.

When you uninstall VR-Vantage, VR-Forces, or VR-Engage, files such as scenarios or SMSs that reside in the product directory are also deleted. Before uninstalling, copy any of your custom files from the product directory to another folder.

Deleting the installation directory does not remove the data package. That is in a separate directory (for example, `./SharedData/18/latest`).

2.2. The Logger Directory Structure

The MAK Data Logger installation process creates a directory structure like the one shown in Figure 2.

Figure 2. Logger directory structure

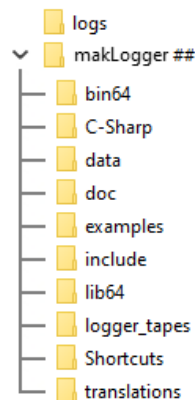


Table 1 describes the contents of the Logger directories.

Table 1. Logger directory structure

Directory	Contents
<i>bin64</i>	Executables and DLLs.
<i>C-Sharp</i>	C# Remote Control API and examples.
<i>data</i>	Subdirectories contain default configuration files and images used in the GUI.
<i>doc</i>	Documentation.
<i>examples</i>	Examples of the Logger API and the Logger File API.

Table 1. Logger directory structure (continued)

Directory	Contents
<i>include</i> and <i>lib64</i>	Header files and libraries for the Logger API and Logger File API.
<i>logger_tapes</i>	Sample Logger files.
<i>Shortcuts</i>	Contains the shortcuts to the documentation, which is used for the Windows Start menu.
<i>translations</i>	Translation files for localizing the Logger.

2.3. Installing and Setting Up the MAK License Manager

Before you can use a MAK ONE product, you must obtain a valid license file, install the MAK License Manager, and configure the license server and client machines. The License Manager uses a client-server architecture, so you do not need to install the License Manager on every computer on which you install MAK ONE products. You only need to install it on the computer that you will use as the license server.

 If you have already installed the License Manager for another MAK ONE product, you do not have to install it again. You only need licenses for your newly installed products.


The License Manager installer is included with MAK installation media. It is separate from the product installers. You can download the installers from the [MAK ONE Product Downloads](https://www.mak.com/mak-one-downloads) page at <https://www.mak.com/mak-one-downloads>.

Complete installation and configuration instructions are included with the License Manager installer. The *MAK ONE Installation Guide* is available at <https://mak.com/mak-one-installation-guide>.

Some customers use dongle licenses instead of running a license server. Instructions for using dongles are also in the *MAK ONE Installation Guide*.

2.3.1 Specifying the License Server

The first time you run a MAK ONE product on a particular computer, the License Setup dialog box opens (Figure 3). It prompts you to enter the hostname of the license server and, optionally, a port number.

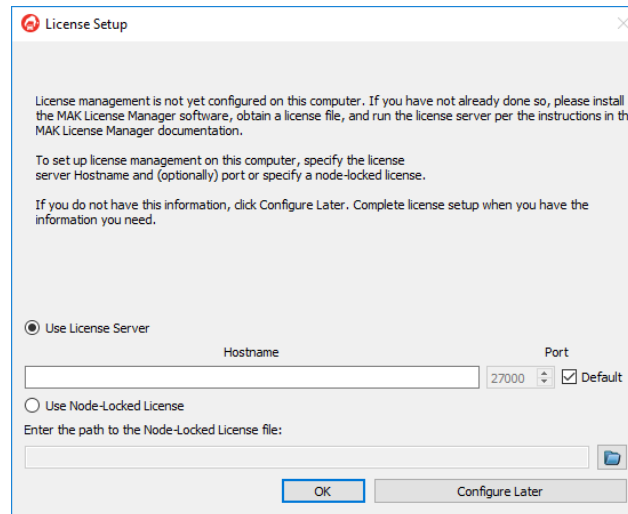Figure 3. License Setup dialog box

If you do not know the hostname of the license server, click **Configure Later**. When you have the hostname, you can start the application again and complete the dialog box. You will not be able to run any MAK ONE products until you set up license management.

If you know the hostname, enter it in the **Hostname** box and then click **OK**. The application will start.

Under limited circumstances, MAK issues node-locked licenses. If you have a node-locked license, select the **Use Node Locked License** option and enter the path to the license file.



- If you are running MAK ONE products on the license server machine, it is also a client, so you must specify the license server on that machine, too.
- If you change the license server, the saved configuration will no longer be valid and the License Setup dialog box will open the next time you start a MAK ONE product.
- If you have changed the license server, you may want to clear the license cache. You can clear the saved license configuration by deleting the cache file. On Windows, it is `C:\Users\user_name\AppData\Roaming\MAK\licenses<n>.txt`. (The `AppData` directory is hidden by default.) On Linux, it is `.mak/license<n>.txt`. (There may be more than one cache file, for example, `licenses1.txt` and `licenses2.txt`.) You can also clear the cache in the RTI Assistant.

Setting the MAKLMGRD_LICENSE_FILE Environment Variable

As an alternative to using the license setup procedure described in the previous section, you can configure the license server or node-locked license in an environment variable. The `MAKLMGRD_LICENSE_FILE` environment variable identifies the server machine. If you set this environment variable, it overrides the settings stored by the license setup procedure.

For license servers, the syntax for the environment variable is: `@server_name`. For example, if the server machine is `oak`, set the environment variable to `@oak`.

The following sections explain how to set environment variables on the different platforms that MAK ONE products run on.

Windows

► To set MAKLMGRD_LICENSE_FILE in Windows:

1. On the Start menu, click the Settings button (⚙️). The Settings window opens.
2. In the Search box, enter `environment`. A list of choices displays.
3. Select `Edit the System Environment Variables`. The System Properties dialog box opens to the Advanced tab.
4. Click the Environment Variables button. The Environment Variables dialog box opens.
5. Below the System Variables list, click `New`. The New System Variable dialog box opens.
6. In the Variable Name field, enter `MAKLMGRD_LICENSE_FILE`.
7. In the Variable Value field, enter `@server_name`, where `server_name` is the name of the license server.
8. Click `OK` to save out of each dialog box and set the variable.

Linux

On Linux, you set environment variables in your `.cshrc` (or equivalent startup file).

► To specify a license server, set the variable similarly to:

```
setenv MAKLMGRD_LICENSE_FILE @oak
```

If you are using the `sh` or `bash` shells, you set environment variables in your `.profile` file (or `.bashrc`). Set the variable similarly to:

```
MAKLMGRD_LICENSE_FILE=@oak
export MAKLMGRD_LICENSE_FILE
```

Do not put spaces around the equal (=) sign.

You are ready to run the license server and use your new licenses or MAK ONE products.

2.4. Installing an RTI

An RTI is a software library (and perhaps supporting executables) that implements an HLA Interface Specification. In HLA, applications exchange FOM data through RTI calls, which means that all HLA applications need to use an RTI. MAK Technologies has the MAK RTI, but MAK ONE products do not require that you use the MAK RTI.



Because of differences in the low-level network mechanisms used by different RTI implementations (which include, but are not limited to, packet layout), applications that want to interoperate in the same federation execution must use the same RTI implementation.

Because RTIs are usually provided as dynamic libraries that implement a fixed API, a federation can often switch from one RTI implementation to another between runs (without even recompiling the applications), but during each run, all participants must agree on which RTI to use, much as they must also agree on which FOM to use.

For the most recent information about the RTI versions supported by MAK ONE products, please visit the Product Specifications & Dependencies page (<https://www.mak.com/mak-one-specs>).

The following instructions explain how to install the MAK RTI. If you are using an RTI provided by another vendor, please refer to that RTI's documentation for installation and setup instructions.

2.4.1 Installing the MAK RTI

To install the MAK RTI, follow the instructions in Chapter 2 of *MAK RTI Users Guide*. To install another RTI, see the vendor's documentation.

Configuring Your System to Use the MAK RTI

The RTI dynamic libraries must be located somewhere on your dynamic library search path. The path is specified in the PATH environment variable. The path is indicated by an environment variable:

- Linux — LD_LIBRARY_PATH.
- Windows — PATH.
- The MAK RTI needs to know where to find these configuration files:
 - The federation configuration file (*.fed*, *.fdd*, or *.xml*) for your federation execution (required).
 - The RID file (*rid.mtl*) (optional).

Put the configuration files in the directory from which you are running, or set the environment variable RTI_CONFIG to the directory that contains them.

Running Applications with the MAK RTI

► To run a MAK ONE product with the MAK RTI:

1. Ensure that the license server is running.
2. Start the application. The RTI Assistant prompts you to choose an RTI configuration.
3. Choose a configuration. If necessary start the rtiexec.
4. Click Connect. The application should run.

In many cases, you do not need to run the rtiexec to use the MAK RTI, however you can run the rtiexec if you want to. (It is required to use certain features of the MAK RTI.) For more information, please see your RTI documentation.


2.5. Localizing the Graphical User Interface

You can localize your MAK ONE product's graphical user interface so that it uses languages other than English. Your product includes a file called `./translations/product_untranslated.ts`, for example, `logger_untranslated.ts`. The file contains entries for all of the application-specific menu and dialog box text. The Qt Linguist tool, which is included with the Logger, lets you map the English text provided by MAK to your chosen language.

► **To edit a resource file:**


1. Start the Qt Linguist utility. It is `./translations/linguist.exe`
2. In the Qt Linguist window, choose **File > Open**. Select the file `./translations/product_untranslated.ts`. The Settings for *filename* dialog box opens (Figure 4).

Figure 4. Linguist settings dialog box

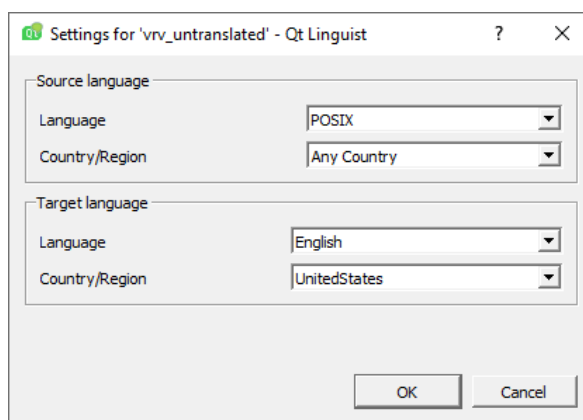


3. Select values for the source language, target language, and target region or country.
4. Click OK. The translation file opens and a list of classes displays on the left side of the window (callout 1 in Figure 5).

Figure 5. Linguist window

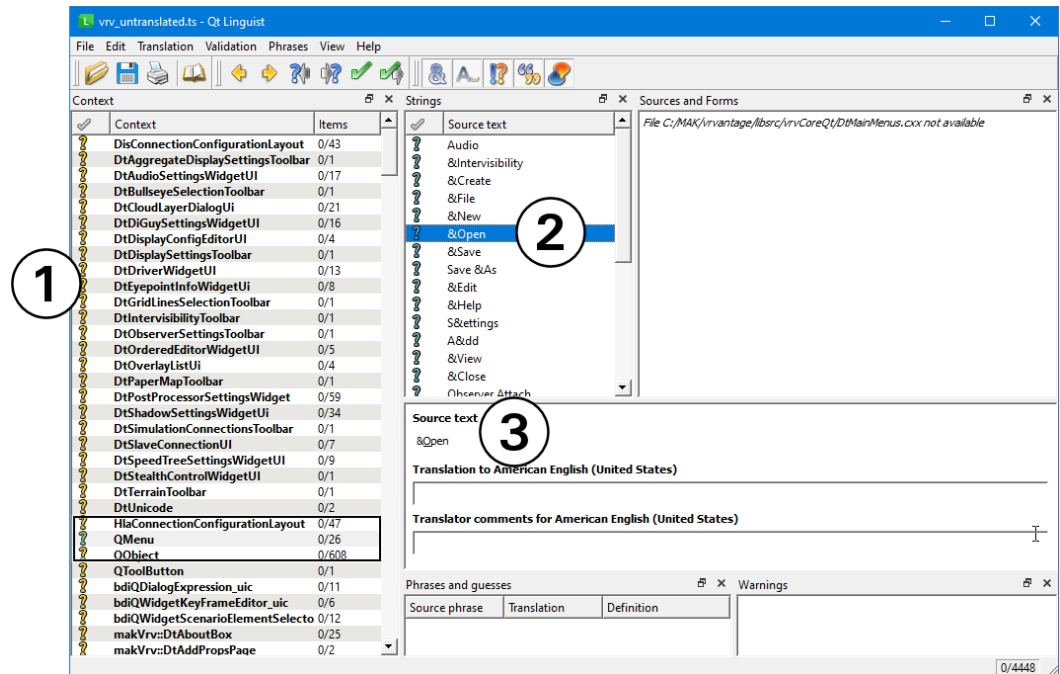

- To translate text, select each class in turn and translate the text associated with that class. You do not have to understand anything about what the classes mean; you only need to translate the text. In Figure 5, **QMenu** is selected. The Strings window lists text that can be translated (callout 2). Text that has not been translated has a blue question mark in the checkmark column.
- In the Source Text list, select the word you want to translate. The text displays under Source Text in the translation area (callout 3 in Figure 5).
- Place the cursor in the text box below *language* Translation, where *language* is the target language that you selected when you opened the translation file.
- Type the translation text.
- When you are done and you are certain of the translation, select the Done and Next button () on the toolbar. A green check mark replaces the question mark (Figure 6). If you move to a different text string without clicking Done and Next, a yellow question mark is displayed for the string you translated. When you translate all elements for a class, a green check mark replaces the question mark next to the class name.

Figure 6. Completed translation for Open

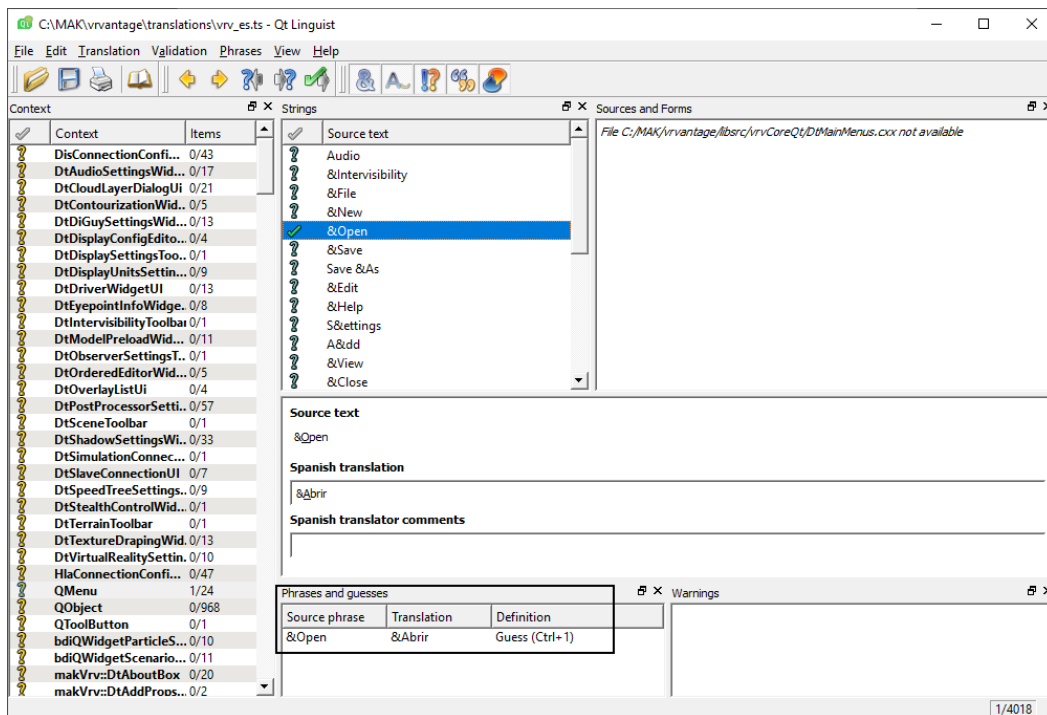

10. Repeat this process for each element of source text for each class.
11. Choose **File > Release**. The file is saved in the format *filename.qm*.
12. Rename the file to a name that indicates the language to which you have translated the file, using the two-character abbreviation typically used with your language. For example, a Spanish translation would be renamed *product_es.qm*.
13. Save your translated *.ts* file.

2.5.1 Translating Other Interface Files

The *logger_untranslated.ts* file contains all the text used in the Logger interface. However, there may be other text and messages that are not specific to the Logger that are generated by the software that implements the Logger GUI. To translate this text, you need to translate the file *qt_untranslated.ts*. Follow the same procedure as you did for *logger_untranslated.ts*.

2.5.2 Applying the Language Files

► To put the language file into effect, use one of the following methods:

- Set your computer's environment to the proper language (LANG environment variable).
- Set the locale to the proper language.
- Start the Logger with the *-G locale* command-line option, where *locale* is the two-letter country code for the local language.



3. Logger Concepts


This chapter describes the Logger's basic functioning.

3.1. What the Logger Does During Recording and Playback	48
3.1.1 The Exercise Connection	48
3.1.2 What The Logger Does During Recording	48
3.1.3 What the Logger Does During Playback	49
3.1.4 Recording and Playback Using HLA Time Management	50
3.2. Timescale During Playback	51
3.2.1 Using Time Scaling with Time Management	51
3.2.2 Compensating for Timescale Effects During Playback	51
3.3. HLA Support	53
3.3.1 FOM Flexibility	53
3.3.2 Backward Compatibility	53

3.1. What the Logger Does During Recording and Playback

This section describes, in general, what happens when you record and play back exercises. Figure 7 illustrates the Logger window with a file loaded.

Figure 7. The Logger window

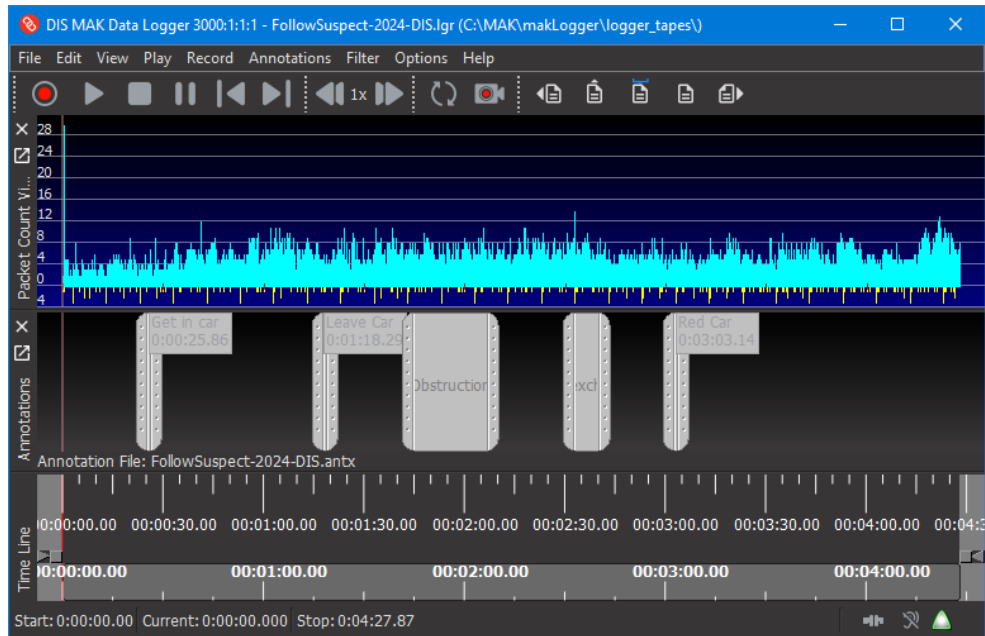

3.1.1 The Exercise Connection

Before you can record an exercise or play one back, you must connect to a DIS or HLA exercise. You can set connection parameters in the appropriate *lgrConfig.xml* file, from the command line, or through the GUI. For details, see "4.1. Configuring the Exercise Connection" on page 57.

i Each version of the Logger has its own configuration file (*lgrConfigDIS.xml*, *lgrConfigHLA13.xml*, *lgrConfigHLA1516.xml*, and *lgrConfigHLA1516e.xml* in the *bin64* directory). For simplicity, this manual refers to these files generically as *lgrConfig.xml* when the reference is not protocol-specific.

3.1.2 What The Logger Does During Recording

In record mode, the Logger is in either a recording state or paused state. When paused, the Logger does not record data and does not advance time.

DIS Only

By default, the Logger connects to exercises using an exercise ID of 0, which means Any Exercise. When the exercise ID is 0, the Logger records all DIS packets it receives, without regard to exercise ID. With each PDU it records, the Logger stores a timestamp indicating when the PDU occurred relative to the start of the file.

If you specify that the Logger connect with an exercise ID other than 0, it only records PDUs that have the same exercise ID.

HLA Only

The Logger subscribes to objects, attributes, and interactions, and it records updates, interactions, and object removals that it perceives through the RTI. It requests updates as it discovers each new object, and records values for all published attributes of those objects.

If a recorded object has a name beginning with HLA_, the Logger adds LGR_ to the beginning of the name. This allows these objects to be properly published during playback. You can configure this behavior with the `SetDynamicNamePrefix` command.

3.1.3 What the Logger Does During Playback

When the Logger is in playback mode, it is in a playing state, a paused state, or a stopped state. When the Logger is playing, it reads messages from a file and transmits them in sequence over the network. When the Logger is paused, it halts at the current timepoint in the file and stops sending new data.

During playback, you can control the playback speed to produce real-time, fast motion, and slow-motion effects. For more information, see "3.2. Timescale During Playback" on page 51.

The Logger lets you navigate to any timepoint in a file. For procedures, see "8.3. Moving the Timepoint to a Specific Time" on page 130.

DIS Only

When the Logger is paused, it repeatedly retransmits messages that represent the current state of each entity to maintain the DIS heartbeat. (This retransmission is not needed in HLA.)

In DIS, when you start the Logger and specify a file for playback, the Logger sends the recorded PDUs to the UDP port specified in *lgrConfigDIS.xml*, the command line, or in the Connection dialog box. If the Logger's exercise ID is 0, it sends each PDU with the same exercise ID as the PDU had when it was recorded. If the Logger's exercise ID is set to a number other than 0, all of the PDUs get sent with the Logger's exercise ID.

HLA Only

In HLA, the Logger acts as a federate that owns each of the objects represented in the file. The Logger sends interactions and updates only for classes that other federates are subscribed to. The Logger serves as a proxy simulator, answering requests for attribute updates and making objectRemove RTI calls when it encounters removals in the recorded file.



By default, HLA 1516 and HLA Evolved use name reservation. When name reservation is in effect, the RTI does not allow the Logger to create entities with names that have previously been used. This becomes an issue when you loop a Logger file. The RTI can rename objects the second time they are created, but this renaming is not passed along to the attributes of objects such as aggregates or to interaction parameters. They will look for objects that have the original names and will not be able to find them.

If you are using the MAK RTI, you can work around this problem by disabling the **RTI_enableNameReservation**, **RTI_strictNameReservation**, and **throwExceptionForDisabledService** parameters in *rid.mtl*.

3.1.4 Recording and Playback Using HLA Time Management

The Logger supports HLA Time Management in both record and playback mode. In record mode, the Logger participates as a time-constrained federate. In playback mode, it participates as a time-regulating federate. The contents of the files created in time-managed mode are identical to those created when not using Time Management, however the arrival time recorded for each packet is determined differently when using Time Management.



HLA Time Management is not supported in the text interface.

Playback Using Time Management

You can play any Logger file with or without Time Management enabled. If you play a file without using Time Management, packets are sent as RO updates. If you are using Time Management, they are sent as TSO updates.

To play files with Time Management enabled, you must use a FED file that is coded to indicate which FOM attributes and parameters are to be sent in TSO mode. The Logger comes with a properly written FED file named *VR-LinkTM.fed* for use with Time Management.

When the Logger joins a federation in time-managed mode, it asks to be a time-regulating federate. Its initial time request is the current value of the lower bound timestamp (LBTS). If there are no other time regulating federates (LBTS is infinity), the initial time request is zero.

The Logger starts playback at the point in the file where the arrival time equals or exceeds the current federation time grant plus the lookahead. Therefore, it is possible that the Logger could skip significant portions of the file, or even all of it. To ensure that you play

the entire file, make sure that the Logger is the first time-regulating federate to join the federation execution, or offset the times in the file relative to an appropriate starting time value.

Once it starts playback, the Logger advances at whatever rate is determined by the time scale setting. For more details, see "3.2. Timescale During Playback" below.

Some Logger Features Are Restricted When You Use Time Management

When you play a file with Time Management enabled, some restrictions apply:

- You cannot jump to different points in the file.
- You cannot pause playback.
- You can stop, but you cannot restart unless you restart the entire federation execution.

3.2. Timescale During Playback

The Logger lets you play a file at any speed within the capabilities of your platform.

You determine the speed by specifying a timescale value, which is the factor by which time is multiplied during playback. The default timescale setting of 1.0 causes a Logger file to play forward at normal speed. A timescale of 0.5 results in half-speed playback.

For procedures, see "8.1.7 Setting the Playback Speed" on page 126.

3.2.1 Using Time Scaling with Time Management

When you play a Logger file using Time Management, the Logger acts as a time-regulating federate. If the Logger sends updates more slowly than other time-regulating federates, it may slow down the federation execution. If it sends updates much more quickly than the other federates, it could overwhelm the RTI. Therefore, you should try to set the time scale to a value that is synchronized with the overall speed of federation execution.

3.2.2 Compensating for Timescale Effects During Playback

The Logger has corrective features that adjust the content of outgoing messages for different playback speeds. Under DIS, the Logger generates interim PDUs that prevent receiving applications from inappropriately timing out entities during slow-speed playback. Under both DIS and HLA, velocity and acceleration scaling can adjust message content to prevent anomalies in vehicle movement that would otherwise occur at any playback speed other than real-time.

Generating Interim PDUs During Slow-Speed DIS Playback (Heartbeating)

In a DIS exercise, each participating entity sends PDUs to other applications at a regular time interval, called the heartbeat. A common heartbeat rate is 5 seconds.

Most receiving applications expect to receive PDUs from each entity at the agreed-upon heartbeat rate. If a receiving application does not receive a PDU from an entity for an unusually long time, it may conclude that the entity no longer exists, and then stop simulating (or time out) the entity. A typical timeout threshold is 12 seconds, or 2.4 times the heartbeat rate.

During slow-speed playback in DIS, the long time lapse between an entity's recorded PDUs might cause receiving applications to time the entity out prematurely. To prevent this, the Logger generates interim PDUs as needed to maintain each entity's heartbeat.

The Logger calculates the contents of an interim PDU by applying a dead-reckoning algorithm to an entity's most recent PDU.

By default, the Logger ensures that at least one PDU is transmitted for each entity every five seconds. You can specify a different heartbeat rate. For procedures, see "4.3.11 Specifying the Heartbeat" on page 74.

Scaling the Timeout Period During Slow-Speed Playback

When an entity's PDUs stop occurring in the file, the Logger continues to generate interim PDUs for the entity for the specified timeout period.

During slow-speed playback, the timeout period is extended accordingly. For example, when playing a file at half-speed, using the default timeout setting of 12 seconds, the Logger generates interim PDUs for an entity for 12 recorded seconds, or 24 real-time seconds before timing it out.

For procedures, see "4.3.12 Specifying the Timeout" on page 75.

Updating Entity Information Quickly After a Time Jump

During playback, you can jump to an arbitrary timepoint. After the time jump, the Logger resumes sending update messages for all entities, starting at the new timepoint. Some time may pass before a fresh update message is sent for each entity, so until updates arrive, receiving applications will reflect entity states that existed before the time jump.

DIS Only

In DIS, these applications may time entities out.

After a time jump, the Logger can generate up-to-date interim messages to fill the period before the transmission of each entity's next recorded update. To create these interim updates, the Logger applies a dead-reckoning algorithm to each entity's most recent recorded message prior to the new time point.

Because additional processing is required, you will experience a delay when jumping to a new timepoint. The length of the delay depends on the number of entities processed and the size of the time jump.

Velocity and Acceleration Scaling

When the Logger plays at speeds above or below normal, it can adjust the velocity and acceleration values in entity state messages. This scaling allows the receiving applications to perform accurate dead-reckoning.

For example, if the Logger is playing at double speed, it can double the values in a message's velocity and acceleration fields. This adjustment causes a vehicle to move at double its original speed when viewed using an application such as VR-Vantage Stealth. Without this scaling, a moving vehicle would appear to be moving at its original slower speed, and would have to lurch forward with the arrival of each new state update message in order to catch up with the new location data contained in the update.

3.3. HLA Support

This section describes compatibility and support issues for running the Logger in HLA. Refer to the *MAK Data Logger Release Notes* and any supplementary documentation for your version of the Logger for current information about FOM support.

3.3.1 FOM Flexibility

You can change the FED file between recording and playback. As long as the FED file you are using on playback contains object and interaction classes, as well as attributes and parameters with the same names and format as those that were recorded, you can play back your file.

Classes, attributes, and parameters can be rearranged in the FED file, and new ones can be added. If any class names were deleted from the FED file between recording and playback, recorded interactions and updates for those classes are not be included in the Logger's outgoing data stream. If any attributes or parameter names were deleted from the FED file, those attributes and parameters do not appear in outgoing updates and interactions.

3.3.2 Backward Compatibility

Different versions of the RPR FOM represent many attributes and parameters differently. They are essentially different protocols. Therefore, you may not be able to play back a Logger file recorded with previous versions of the Logger in the same federation execution as applications based on the current RPR FOM.

Refer to "Appendix A. Troubleshooting" on page 225 or the [MAK ONE Product Support Knowledge Base](https://www.mak.com/knowledge) (<https://www.mak.com/knowledge>) for current information about backward compatibility.



4. Configuring the Logger Connection

This chapter explains how to configure connections for DIS and HLA. For general information about configuring the Logger, see "Chapter 5. Configuring the Logger" on page 77.


4.1. Configuring the Exercise Connection	57
4.1.1 Viewing Connection Properties	57
4.1.2 Editing a Connection	57
4.2. Configuring the Logger for HLA	58
4.2.1 Specifying the Name of the Logger Federate (HLA Evolved Only)	59
4.2.2 Specifying the Type of the Logger Federate	60
4.2.3 Specifying the Federation Execution Name	60
4.2.4 Specifying a FED File	61
4.2.5 Specifying FOM Modules (HLA Evolved Only)	61
4.2.6 Specifying the MIM (HLA Evolved Only)	61
4.2.7 Specifying the RPR FOM Version	62
4.2.8 Specifying the RPR FOM Revision	62
4.2.9 Ignoring Advisory Messages	63
4.2.10 Specifying a FOM Mapper	63
4.2.11 Configuring Time Management	65
4.2.12 Specifying the Logger Subscription List	66
4.2.13 Subscribing Passively to Objects and Interactions	68
4.2.14 Enabling Request Attribute Updates	69
4.2.15 Sending Only Updated Values	69
4.3. Configuring the Logger for DIS	70
4.3.1 Specifying a UDP Port	70
4.3.2 Setting the Exercise ID	71
4.3.3 Setting the Site ID	71
4.3.4 Setting the Application Number	71
4.3.5 Using Asynchronous I/O	72
4.3.6 Specifying a Destination Address for Outgoing and Incoming Data	72

4.3.7 Setting the Subnet Mask	72
4.3.8 Setting the Buffer Size for Sending and Receiving PDUs	73
4.3.9 Setting the Multicast Time to Live Value	73
4.3.10 Setting the Network Interface Address	73
4.3.11 Specifying the Heartbeat	74
4.3.12 Specifying the Timeout	75
4.3.13 Specifying the DIS Version	75
4.3.14 Subscribing to Multicast Groups	75

4.1. Configuring the Exercise Connection

The Logger connects to exercises through an exercise connection. You can connect to and disconnect from an exercise. When you connect to an exercise, you must specify the parameters for the protocol you are using (DIS or HLA). The connection status displays in the Logger status bar (Figure 8).

Figure 8. Connection status

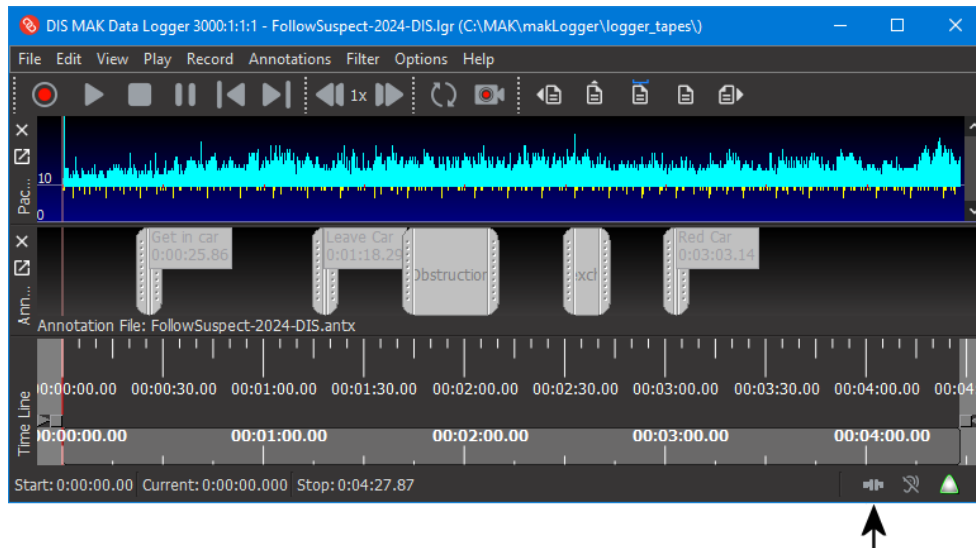

4.1.1 Viewing Connection Properties

In the GUI, you can view the configuration of the current exercise connection for the Logger. When the Logger is connected to an exercise, the connection settings are read-only.

- To view connection properties, choose **File > Connection**, or right-click the connection status icon. The Connection dialog box opens (Figure 9 and Figure 10).

4.1.2 Editing a Connection

If you are not connected to an exercise, you can set connection properties and connect to the network. For descriptions of the various properties, see "4.2. Configuring the Logger for HLA" on the next page and "4.3. Configuring the Logger for DIS" on page 70.

By default, when you change connection properties, they are saved to the *lgrConfig.xml* configuration file. You can enable and disable this setting in the Preferences dialog box, Network Settings page.

- ① You cannot edit a connection while you are connected. The fields are read-only. To make a connection editable, disconnect from it.
You can copy the connection information while connected, however, which allows you to use or share that information as needed.

► To edit a connection:

1. If the Logger is connected to an exercise, choose **File > Disconnect**.
2. Choose **File > Connection**. The Connection dialog box opens. It displays the current settings for the protocol you are using (DIS (Figure 9) or HLA (Figure 10)).

Figure 9. Connection dialog box for DIS


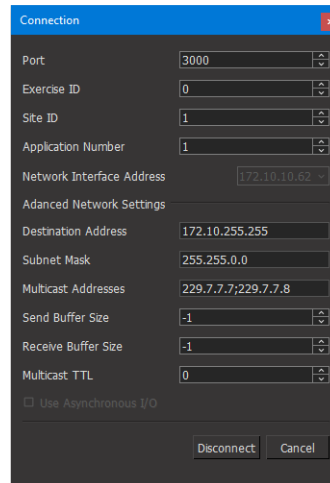


Figure 10. Connection dialog box for HLA Evolved

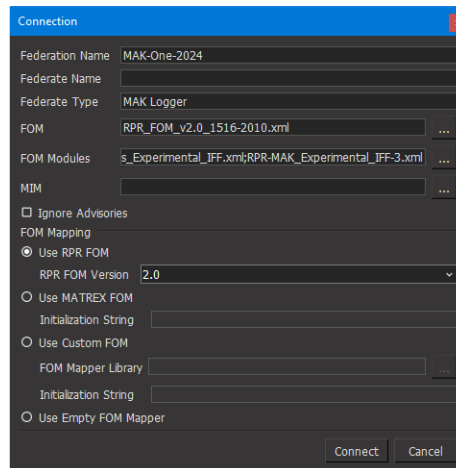

3. Change attribute values as desired.
4. Click Connect.

4.2. Configuring the Logger for HLA

This section describes how to configure the Logger for HLA exercises. For details about configuring connection settings in the GUI, see "4.1.2 Editing a Connection" on the previous page.

Most of the HLA connection settings can be set using individual command-line options or by using the **SetConnectionParameters** command in the text interface.

The syntax for `SetConnectionParameters` for HLA 1.3 and HLA 1516 is:

```
SetConnectionParametersHLA federateName federationName fedFile
ignoreAdvisories fomVersion fomRevision useMatrexFomMapper
matrexFomMapperData fomMapper fomMapperData useEmptyFomMapper
noRtiCompilerCheck
```

For example:

```
SetConnectionParametersHLA "MAK Logger" MAK-RPR2.0 MAK-RPR2-1-10.fed
False 2.0 1 False "" myFomMapper "myInitParameter1 myInitParameter2
..." False False
```

The syntax for `SetConnectionParameters` for HLA Evolved is:

```
SetConnectionParametersHLAe federateName federateType federationName
fedFile "fomModules" MIM ignoreAdvisories fomVersion fomRevision
useMatrexFomMapper matrexFomMapperData fomMapper fomMapperData
useEmptyFomMapper noRtiCompilerCheck
```

For example:

```
SetConnectionParametersHLAe Logger "MAK Logger"
MAK-RPR2.0 MAK-RPR2-1-1.xml "VR-Link_evolved_module.xml
extendF18Module.xml" HLAstandardMIM.xml False 1.0 1 False ""
myFomMapper "myInitParameter1 myInitParameter2 ..." False False
```

The *fomMapperData* and *matrexFomMapperData* arguments can be lists. If so, you must wrap each list in quotes.

When you use the `SetConnectionParameters` command, you must specify all of the arguments, whether you want to change them from the default values or not. If you want to change only the name of the Logger federate, for example, even though it is the first argument in the list, you still must enter a complete command:

```
SetConnectionParametersHLA myLogger MAK-RPR2.0 MAK-RPR2-1-10.fed
False 2.0 1 False "" myFomMapper "myInitParameter1 myInitParameter2"
False False
```

For details about commands and command syntax, see "Chapter 14. Using Logger Commands" on page 193.

4.2.1 Specifying the Name of the Logger Federate (HLA Evolved Only)

If you are using HLA Evolved, you must specify the federate name. By default, the Logger federate is named MAK Logger.

- To specify the federate name, use the `(-N | --federateName)` command-line option or the `SetConnectionParameters` command.

Table 2. Specifying the federate name

Interface	Command
GUI	Connection dialog box: Federate Name attribute.
Command line	<code>loggerversion -N myLogger</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>federateName</code> variable is in the default configuration file.

4.2.2 Specifying the Type of the Logger Federate

By default, the Logger federate type is "MAK Logger".

- To specify the federate type, use the `--federateType` command-line option or the `SetConnectionParameters` command.

Table 3. Specifying the federate type

Interface	Command
GUI	Connection dialog box: Federate Type attribute.
Command line	<code>loggerversion --federateType "my custom Logger"</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfigHLA1516e.xml</i>	The <code>federateType</code> variable is in the default configuration file.

4.2.3 Specifying the Federation Execution Name

By default, the Logger uses the federation execution name MAK-RPR-2.0.

i By default, the Logger assumes that the federation configuration file (FED, FDD) file has the same name as the federation execution, plus the appropriate extension. For details, see "4.2.4 Specifying a FED File" on the facing page.

- To specify a federation execution name, use the `(-x | --execName)` command-line option or the `SetConnectionParameters` command.

Table 4. Specifying the federation execution name

Interface	Command
GUI	Connection dialog box: Federation Name attribute.
Command line	<code>loggerversion -x MAK-RPR-2.0</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>execName</code> variable is in the default configuration file.

4.2.4 Specifying a FED File

By default, the Logger uses a FED file called *MAK-RPR2-1-10.fed*. The Logger also accepts federation description files with the *.fdd* and *.xml* extensions. MAK products come with a FED (and XML) file for each version of the RPR FOM that they support.

i If you are using HLA Evolved, the FED (FDD) file defines the primary FOM, to which FOM modules may be added.

- To specify a FED file, use the (`-F` | `--fedFileName`) command-line option or the `SetConnectionParameters` command.

Table 5. Specifying the FED file

Interface	Command
GUI	Connection dialog box: FED File Name attribute.
Command line	<code>loggerversion -F MAK-RPR-2.0.fed</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>fedFileName</code> variable is in the default configuration file.

4.2.5 Specifying FOM Modules (HLA Evolved Only)

If you are using HLA Evolved, you can specify FOM modules. FOM modules are added to the primary FOM, which is specified by the FED file. By default, the Logger configures FOM Modules in *lgrConfigHLA1516e.xml*. The Logger also accepts FOM Module files with the *.xml* extension. MAK ONE products come with a few FOM modules that define the VR-Link specific classes that are used by our products.

- To specify FOM modules, use the `--fomModules` command-line option or the `SetConnectionParameters` command.

Table 6. Specifying FOM modules

Interface	Command
GUI	Connection dialog box: FOM Modules attribute.
Command line	<code>loggerversion --fomModules "module1.xml module2.xml ... modulen.xml"</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfigHLA1516e.xml</i>	The <code>fomModules</code> variable is in the default configuration file.

4.2.6 Specifying the MIM (HLA Evolved Only)

If you are using HLA Evolved, you can specify a MOM and Initialization Module (MIM). By default, the Logger does not use a MIM. The Logger accepts MIM files with the *.xml* extension. MAK ONE products come with the standard MIM. When you specify MIM file, the Logger looks for it in its *bin64* directory.

- To specify the MIM, use the `--MIM` command-line option or the `SetConnectionParameters` command.

Table 7. Specifying the MIM

Interface	Command
GUI	Connection dialog box: MIM attribute.
Command line	<code>loggerversion --MIM HLAstandardMIM.xml</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfigHLA1516e.xml</i>	The MIM variable is in the default configuration file.

4.2.7 Specifying the RPR FOM Version

The Logger has built-in FOM Mapping support for the RPR FOM 1.0 and RPR FOM 2.0 standards as well as many of the draft RPR FOM versions (0.5, 0.7, 0.8, 2.006, 2.0014, and 2.0017). For each RPR FOM version, there is a separate FOM Mapper. All the FOM Mappers for the RPR FOM are contained in a VR-Link library used by the Logger. When you select the FOM Mapping to be RPR FOM, you must also choose which of the RPR FOM Mappers to use. The default version is 2.0. If you specify a RPR FOM version other than the default, you must also specify the correct FED file.

 See the *MAK Data Logger Release Notes* for a list of the RPR FOM versions supported by your version of the Logger.

- To specify the RPR FOM version, use the `--rprFomVersion` command-line option or the `SetConnectionParameters` command.

Table 8. Specifying the RPR FOM version

Interface	Command
GUI	Connection dialog box: Use RPR FOM option and RPR FOM Version attribute.
Command line	<code>loggerversion --rprFomVersion 2.0017 -F VR-Link20017-1.fed</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>rprFomVersion</code> variable is in the default configuration file.

4.2.8 Specifying the RPR FOM Revision

Each RPR FOM version has a separate RPR FOM Mapper. However, in some cases the implementation of a particular RPR FOM Mapper has required modification to correct misinterpretations of the standard. To support backwards compatibility with VR-Link versions that contain the misinterpretation, these modifications are associated with a revision number. The revision number can then be used by a newer RPR FOM Mapper to modify its encodings and decodings to revert back to an older VR-Link version that does not support the newer corrected interpretations. The default revision is 1. If you specify a RPR FOM revision other than the default, you must also specify the correct FED file, which may or may not be the same as the current selection. For example, the FOM Mapper for

RPR FOM 2 draft 17 revisions 1 through 5 use a FED or XML file named *MAK-RPR20017-1-1*; revision 6 uses *MAK-RPR20017-6-1*. There are versions for HLA Evolved with a similar naming convention.

- To specify the RPR FOM revision, use the `--rprFomRevision` command-line option or the `SetConnectionParameters` command.

Table 9. Specifying the RPR FOM revision

Interface	Command
GUI	Connection dialog box: Use RPR FOM option and RPR FOM Revision attribute.
Command line	<code>loggerversion --rprFomVersion 2.0017 --rprFomRevision 1 - F VR-Link20017-1.fed</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>rprFomRevision</code> variable is in the default configuration file.

4.2.9 Ignoring Advisory Messages

- To have the Logger ignore advisory messages, use `--ignoreAdvisories` on the command line or use the `SetIgnoreAdvisories` command in the text interface or configuration file.

Table 10. Specifying the response to advisory messages

Interface	Command
GUI	Connection dialog box: Select Ignore Advisories.
Command line	<code>loggerversion --ignoreAdvisories 1</code>
Text interface	Use the <code>SetConnectionParameters</code> command, or use <code>SetIgnoreAdvisories true</code>
<i>lgrConfig.xml</i>	The <code>ignoreAdvisories</code> variable is in the default configuration file. You can also add <code>SetIgnoreAdvisories</code> to the configuration file.

4.2.10 Specifying a FOM Mapper

The Logger supports different FOMs using VR-Link FOM Mappers. The Logger chooses the FOM Mapper based on these criteria:

- If a FOM mapper library is specified, it is used.
- If Use Empty FOM Mapper is specified, the empty FOM Mapper is used.
- If neither of the first two options is specified, a default RPR FOM FOM Mapper is used.

i The different versions of the RPR FOM that you can specify with the `rprFomVersion` parameter are actually designating one of several default FOM Mappers supplied with the Logger.

- To specify a FOM Mapper, use the (`-f` | `--fomMapperLib`) or `--useEmptyFomMapper` command-line option or the `SetConnectionParameters` command.

Table 11. Specifying a FOM Mapper

Interface	Command
GUI	Connection dialog box: Select Use Custom FOM and specify FOM Mapper Library and, optionally, Initialization String. Select Use Empty FOM Mapper if the FOM you are using is not a derivative of the RPR FOM and no appropriate FOM Mapper library is available.
Command line	<code>loggerversion -f myFomMapper.dll</code> or <code>loggerversion --useEmptyFomMapper 1</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>fomMapperLib</code> and <code>useEmptyFomMapper</code> variables are in the default configuration file.

Specifying a FED File that is Appropriate for the FOM Mapper

By default the Logger uses a FED file, depending on the version of HLA: HLA 1.3 uses *MAK-RPR2-1-10.fed*, HLA 1516 uses *MAK-RPR2-1-10.xml*, and HLA 1516 Evolved uses *RPR_FOM_v2.0_1516-2010.xml*. You can specify an alternate FED file using the `-F` option.

This example instructs the application to use an alternative FOM Mapper and FED file:

```
loggerversion -f myFomMapper -F myFedFile.fed
```

 The `-f` option only tells the application which FOM Mapper to use. It does not ensure that you are using the correct FED file for the FOM Mapper. Make sure that you are using a FED file that is consistent with the FOM Mapper you have chosen.

Specifying FOM Mapper Initialization Data

Some FOM Mappers require initialization data.

- To specify FOM Mapper initialization data, use the `--fomMapperData` command-line option or the `SetConnectionParameters` command.

Table 12. Specifying FOM Mapper initialization data

Interface	Command
GUI	Connection dialog box: Set Use FOM Mapper to True, specify a FOM Mapper File, and set the FOM Mapper Init Data attribute.
Command line	<code>loggerversion -f myFomMapper.dll --fomMapperData ABC</code> where ABC is passed to the FOM Mapper creator function in the shared library as an initialization parameter.

Table 12. Specifying FOM Mapper initialization data (continued)

Interface	Command
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>fomMapperData</code> variable is in the default configuration file.


4.2.11 Configuring Time Management

The Logger supports time-constrained recording and time-regulating playback. To configure time management in the Logger, it must be enabled in your RTI. If time management is not enabled in the RTI, the configuration options are not available in the Logger Preferences dialog box.

► **To configure time management in the GUI:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the HLA Configuration page (Figure 11).

Figure 11. Logger Preferences dialog box, HLA Configuration page

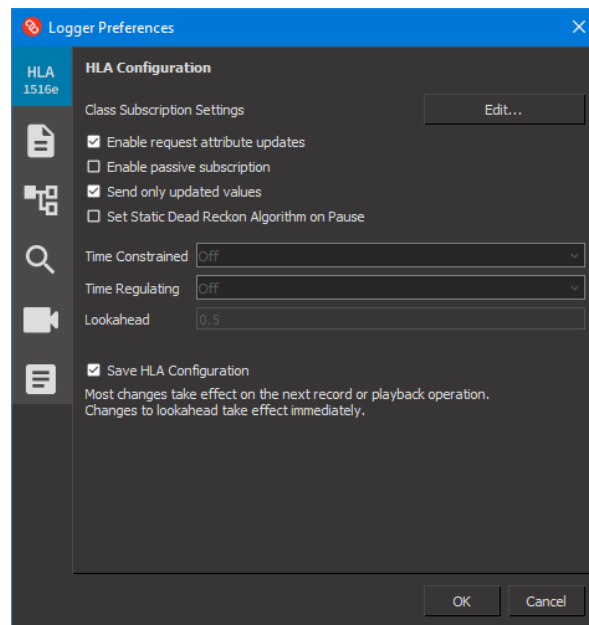

3. To configure the Logger as a time-constrained federate, set the Time Constrained value to Recording.
4. To configure the Logger as a time-regulating federate, set the Time Regulating value to Playback.
5. Optionally, set the Lookahead value.
6. Click OK.

► **To specify time management from a command interface, use the `SetTimeManagement` command.**

Table 13. Specifying time management

Interface	Command
GUI	See procedure in this section.
Command line	<code>loggerversion -r "SetTimeManagement true false false true 0.5"</code>
Text interface	<code>SetTimeManagement true false false true 0.5</code>
<i>lgrConfig.xml</i>	Add <code>SetTimeManagement</code> to the configuration file.

4.2.12 Specifying the Logger Subscription List


By default, the Logger subscribes to all classes in your FED file except *RTIPrivate* and any MOM object or interaction. However, you can specify the set of classes and interactions that the Logger subscribes to by listing them in a command or creating a subscription control list.

Creating a Subscription Control List

In the Logger GUI, you can specify a list of classes to subscribe to and you can save that list to a file.

► **To create a subscription control list in the GUI:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the HLA Configuration page (Figure 11 on the previous page).
3. On the Class Subscription Settings line, click Edit. The Change HLA Class Subscription dialog box opens (Figure 12). The dialog box has a tab that lists object classes and a tab that lists interaction classes. Classes that have a check mark next to their name are filtered out.

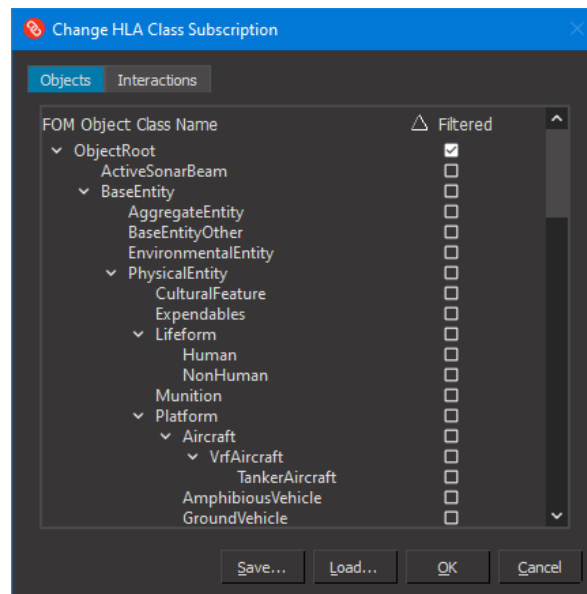Figure 12. Change HLA Class Subscription dialog box

4. Edit the subscription list by checking the box in the Filtered column for classes that you want to filter out.
 5. Click OK. The subscription list takes effect the next time you enter record mode.
- To specify a subscription list in a command interface, use the `SetSubscriptionLists` command.

Table 14. Specifying subscription lists

Interface	Command
GUI	See procedure in this section.
Command line	<code>loggerversion -r "SetSubscriptionLists \"ObjectRoot.BaseEntity.PhysicalEntity.Platform.Aircraft ObjectRoot.BaseEntity.PhysicalEntity.Radio InteractionRoot.WeaponFire\""</code>
Text interface	<code>SetSubscriptionLists "ObjectRoot.BaseEntity.PhysicalEntity.Platform.Aircraft ObjectRoot.BaseEntity.PhysicalEntity.Radio InteractionRoot.WeaponFire"</code>
<i>lgrConfig.xml</i>	Add <code>SetSubscriptionLists</code> to the configuration file. For details about adding a string list to the configuration file, see "Adding a String List to <i>lgrConfig.xml</i> " on page 98.

 The `SetSubscriptionLists` command must come after the `Connect` command.

Saving A Subscription List

- To save a subscription list in the GUI:
1. Edit a subscription list as described in "4.2.12 Specifying the Logger Subscription List" on the previous page.
 2. In the Change HLA Class Subscription dialog box, click Save. The Save As dialog box opens.
 3. Enter a name for the subscription list and click Save. By default, subscription lists are saved in the *bin* directory with the extension *.subx*.
- To save a subscription list in a command interface, use the `SaveSubscriptionListFile` command.

Table 15. Saving a subscription list

Interface	Command
GUI	See procedure in this section.
Command line	<code>loggerversion -r "SaveSubscriptionListFile mySubList.subx"</code>
Text interface	<code>SaveSubscriptionListFile mySubList.subx</code>

Loading A Subscription List

► To load a subscription list in the GUI:

1. In the Change HLA Class Subscription dialog box, click Load. An Open dialog box opens.
2. Select the subscription list file you want to load.
3. Click Open.
4. Click OK to apply the subscription list.

- To load a subscription list in a command interface, use the `LoadSubscriptionListFile` command.

Table 16. Loading a subscription list

Interface	Command
GUI	See procedure in this section.
Command line	<code>loggerversion -r "LoadSubscriptionListFile \"../config/mySubList.subx\""</code>
Text interface	<code>LoadSubscriptionListFile ../config/mySubList.subx</code>
<i>lgrConfig.xml</i>	Add <code>LoadSubscriptionListFile</code> to the configuration file.

4.2.13 Subscribing Passively to Objects and Interactions

The Logger can subscribe passively to objects and interactions. Passive subscriptions instruct the RTI to reflect any matching updates that are sent, but it will not trigger RTI advisories such as `startRegistration` or `turnUpdatesOn`. In this mode, the Logger will not cause any updates to be sent based on its joining the federation. As a result, the Logger should join the federation before any critical updates or interactions that need to be recorded are sent. If you want to use passive subscription, you must specify it before you connect to an exercise.

► To configure passive subscription:

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the HLA Configuration page (Figure 11 on page 65).
3. Select or clear the Enable Passive Subscription check box.
4. Click OK.

- To have the Logger subscribe passively, use the `SetPassiveSubscription` command.

Table 17. Specifying passive subscription

Interface	Command
GUI	See procedure in this section.
Command line	<code>loggerversion -r "SetPassiveSubscription true"</code>

Table 17. Specifying passive subscription (continued)

Interface	Command
Text interface	SetPassiveSubscription true
<i>lgrConfig.xml</i>	Add SetPassiveSubscription to the configuration file.

4.2.14 Enabling Request Attribute Updates

By default, the Logger makes requestAttributeValue update calls when it discovers objects. You can enable or disable this behavior.

► **To configure whether the Logger requests attribute value updates in the GUI:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the HLA Configuration page (Figure 11 on page 65).
3. Select or clear the Enable Request Attribute Updates check box.
4. Click OK.

► **To configure whether the Logger requests attribute value updates when it discovers an object, use the EnableRequestUpdates command.**

Table 18. Specifying attribute value update requests

Interface	Command
GUI	See procedure in this section.
Command line	loggerversion -r "EnableRequestUpdates true"
Text interface	EnableRequestUpdates true
<i>lgrConfig.xml</i>	Add EnableRequestUpdates to the configuration file.

4.2.15 Sending Only Updated Values

During playback, the Logger may receive attribute value update requests for attribute instances that either are not in the file or not played back yet. You can specify that the Logger only send updates for values that it has retrieved from the file. If you disable this option, the Logger sends default values.

 When changing scale or for heartbeating, the Entity and Aggregate publishers send all data. This data may include attributes that have not been recorded in the file.

► **To configure how the Logger responds to attribute value update requests in the GUI:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the HLA Configuration page (Figure 11 on page 65).
3. Select or clear the Send Only Updated Values check box.
4. Click OK.

► **To configure how the Logger responds to attribute value update requests with the command interface, use the SetSendOnlyUpdatedValues command.**

Table 19. Specifying attribute value update requests

Interface	Command
GUI	See procedure in this section.
Command line	<code>loggerversion -r "SetSendOnlyUpdatedValues true"</code>
Text interface	<code>SetSendOnlyUpdatedValues true</code>
<i>lgrConfig.xml</i>	Add <code>SetSendOnlyUpdatedValues</code> to the configuration file.

4.3. Configuring the Logger for DIS

You can configure the Logger for DIS exercises.

Most of the DIS connection settings can be set using individual command-line options or by using the `SetConnectionParameters` command in the text interface. The syntax for this command is:

```
SetConnectionParametersDIS port exerciseId siteId appNumber
useAsynchIO sendBufferSize recvBufferSize multicastTtl destAddr
subnetMask deviceAddr mcastAddresses
```

For example:

```
loggerDIS.exe -r "SetConnectionParametersDIS 3000 1 1 2 True -1 -1 -1
127.255.255.255 255.0.0.0 127.0.0.1 \"229.7.7.8\""
```

When you use the `SetConnectionParametersDIS` command, you must specify all of the arguments, whether you want to change them from the default values or not. If you want to change only the port, for example, even though it is the first argument in the list, you still must enter a complete command:

```
loggerDIS.exe -r "SetConnectionParametersDIS 5000 1 1 2 True -1 -1 -1
127.255.255.255 255.0.0.0 127.0.0.1 \"229.7.7.8\""
```

i The Logger supports IPv4 and IPv6. For any particular connection, all addresses must be of the same type.

For details about commands and command syntax, see "Chapter 14. Using Logger Commands" on page 193.

4.3.1 Specifying a UDP Port

By default, the Logger sends and receives data over UDP port 3000.

- To specify a UDP port, use the `(-P | --disPort)` command-line option or the `SetConnectionParameters` command.

Table 20. Specifying the UDP port

Interface	Command
GUI	Connection dialog box: Port attribute.
Command line	<code>loggerDIS -P 2345</code>

Table 20. Specifying the UDP port (continued)

Interface	Command
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>disPort</code> variable is in the default configuration file.

4.3.2 Setting the Exercise ID

- To specify the exercise ID, use the (`-e` | `--exerciseId`) command-line option or the `SetConnectionParameters` command.

Table 21. Specifying the exercise ID

Interface	Command
GUI	Connection dialog box: Exercise ID attribute.
Command line	<code>loggerDIS -e 3</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>exerciseId</code> variable is in the default configuration file.

4.3.3 Setting the Site ID

- To specify the site ID, use the (`-s` | `--siteId`) command-line option or the `SetConnectionParameters` command.

Table 22. Specifying the site ID

Interface	Command
GUI	Connection dialog box: Site ID attribute.
Command line	<code>loggerDIS -s 3</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>siteId</code> variable is in the default configuration file.

4.3.4 Setting the Application Number

- To specify the application number, use the (`-a` | `--appNumber`) command-line option or the `SetConnectionParameters` command.

Table 23. Specifying the application number

Interface	Command
GUI	Connection dialog box: Application Number attribute.
Command line	<code>loggerDIS -a 2</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>appNumber</code> variable is in the default configuration file.

4.3.5 Using Asynchronous I/O

You can configure the Logger to use asynchronous I/O. Use of asynchronous I/O can help reduce dropped packets during times of high traffic.

- To specify use of asynchronous I/O, use the `SetConnectionParameters` command.

Table 24. Specifying use of asynchronous I/O

Interface	Command
GUI	Connection dialog box: Use Asynchronous IO attribute.
Command line	Use the <code>SetConnectionParameters</code> command.
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>useAsyncIO</code> variable is in the default configuration file.

4.3.6 Specifying a Destination Address for Outgoing and Incoming Data

Normally, the Logger sends outgoing, and receives incoming, data packets using the host machine's default broadcast address. The specified destination address can be a broadcast, multicast, or unicast address.

- To specify a destination address, use the `(-A | --destAddrString)` command-line option or the `SetConnectionParameters` command.

Table 25. Specifying the destination address

Interface	Command
GUI	Connection dialog box: Destination Address attribute.
Command line	<code>loggerDIS -A 205.205.205.205</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>destAddrString</code> variable is in the default configuration file.

4.3.7 Setting the Subnet Mask

When the destination address is not specified ("0.0.0.0"), the subnet mask is used in conjunction with the network interface address to determine the destination broadcast address. If neither is specified (subnet mask is blank), the network interface's default broadcast address is used.

- To specify a subnet mask, use `SetConnectionParameters` command.

By default, the logger will use the subnet mask associated with the IP class.

Table 26. Specifying the subnet mask

Interface	Command
GUI	Connection dialog box: Subnet Mask attribute.
Command line	Use the <code>SetConnectionParameters</code> command.

Table 26. Specifying the subnet mask (continued)

Interface	Command
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>subnetMask</code> variable is in the default configuration file.

4.3.8 Setting the Buffer Size for Sending and Receiving PDUs

You can specify the size of the buffers used for sending and receiving DIS packets. A larger receive buffer reduces the likelihood of dropping packets. Buffer size is specified in bytes. A value of -1 means use the system default value.

- To specify send and receive buffer sizes, use the `--receiveBufferSize` and `--sendBufferSize` command-line options or the `SetConnectionParameters` command.

Table 27. Specifying the send and receive buffers

Interface	Command
GUI	Connection dialog box: Send Buffer Size and Receive Buffer Size attributes.
Command line	<code>loggerDIS --receiveBufferSize 64000 --sendBufferSize 64000</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>sendBufferSize</code> and <code>recvBufferSize</code> variables are in the default configuration file.

4.3.9 Setting the Multicast Time to Live Value

The multicast time to live value specifies the number of router jumps a message can take.

- To specify the multicast time-to-live value, use the `--mcastTtl` command-line option or the `SetConnectionParameters` command.

Table 28. Specifying the multicast time-to-live

Interface	Command
GUI	Connection dialog box: Multicast TTL attribute.
Command line	<code>loggerDIS --mcastTtl 3</code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>mcastTtl</code> variable is in the default configuration file.

4.3.10 Setting the Network Interface Address

The network interface address specifies the address to use when a computer has multiple network cards.

- To specify the network interface address, use the `(-D | --deviceAddrString)` command-line option or the `SetConnectionParameters` command.

Table 29. Specifying the network interface address

Interface	Command
GUI	Connection dialog box: Network Interface Address.
Command line	<code>loggerDIS --deviceAddrString <i>string</i></code>
Text interface	Use the <code>SetConnectionParameters</code> command.
<i>lgrConfig.xml</i>	The <code>deviceAddrString</code> variable is in the default configuration file.


4.3.11 Specifying the Heartbeat

The heartbeat value determines how frequently (in seconds) the Logger generates interim PDUs for each entity during slow-speed playback. For more information, see "Generating Interim PDUs During Slow-Speed DIS Playback (Heartbeating)" on page 51.

► **To set the heartbeat in the GUI:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the DIS Configuration page (Figure 13).

Figure 13. Logger Preferences dialog box, DIS Configuration page

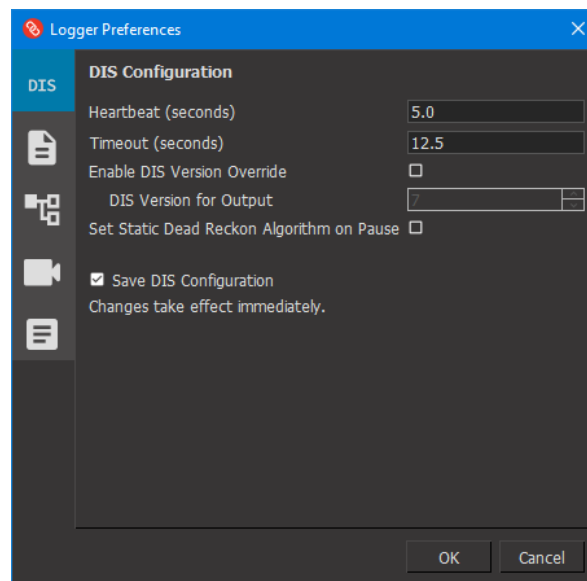

3. Type a value in the Heartbeat text box.

► **To specify the heartbeat from the command interface, use the `SetHeartbeatRate` command.**

Table 30. Specifying the heartbeat

Interface	Command
GUI	See procedure in this section.
Command line	<code>loggerDIS -r "SetHeartbeatRate 5.0"</code>

Table 30. Specifying the heartbeat (continued)

Interface	Command
Text interface	SetHeartbeatRate 5.0
<i>lgrConfig.xml</i>	Add SetHeartbeatRate to the configuration file.

4.3.12 Specifying the Timeout

The timeout value determines how long the Logger continues to generate interim PDUs for an entity once that entity's PDUs have stopped occurring in the file. For more information, see "Generating Interim PDUs During Slow-Speed DIS Playback (Heartbeating)" on page 51.

► **To set the timeout in the GUI:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the DIS Configuration page (Figure 13 on the previous page).
3. Type a value in the Timeout text box.
4. Click OK.

- To specify the DIS timeout from the command interface, use the `SetTimeoutRate` command.

Table 31. Specifying the timeout

Interface	Command
Command line	<code>loggerDIS -r "SetTimeoutRate 12.0"</code>
Text interface	SetTimeoutRate 12.0
<i>lgrConfig.xml</i>	Add SetTimeoutRate to the configuration file.

4.3.13 Specifying the DIS Version

The Logger supports DIS versions 4, 5, 6, and 7.

► **To specify the DIS version:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the DIS Configuration page (Figure 13 on the previous page).
3. Select an option in the DIS Version list.
4. Click OK.

4.3.14 Subscribing to Multicast Groups

In record mode, the Logger can subscribe to multicast groups. When the Logger is subscribed to multicast groups, it also continues to receive data through the machine's broadcast and unicast addresses.

Subscription applies to record mode only.

❗ Multicast subscription is a property of the host machine, not of individual applications. If several applications are running on the same machine using the same port, and those applications subscribe to multicast groups, all the applications will receive packets for all multicast groups to which any application is subscribed. Therefore, if the Logger is using the same port as applications that subscribe to multicast groups, the Logger may receive traffic intended for the other applications.

- To subscribe to multicast groups, use the (-S | --mcastAddresses) command-line option or the `SetConnectionParameters` command.

Table 32. Subscribing to multicast groups

Interface	Command
GUI	Connection dialog box: Multicast Addresses attribute.
Command line	<code>loggerDIS -S "225.0.0.118 225.0.0.202"</code>
Text interface	<code>SetConnectionParameters port exerciseId siteId appNumber useAsynchIO sendBufferSize recvBufferSize multicastTtl destAddr deviceAddr "mcastAddresses"</code>
<i>lgrConfig.xml</i>	The <code>mcastAddresses</code> variable is in the default configuration file.



5. Configuring the Logger

This chapter explains how to configure various Logger features and how to edit the *lgrConfig.xml* file.

5.1. Configuring the Logger	78
5.2. Configuring Indexing	78
5.2.1 Configuring Indexing with the Command Interfaces	79
5.3. Configuring Faster Playback	80
5.3.1 The SetEntityTracking Command	80
5.3.2 The SetFastJumpsWithoutDiff Command	81
5.3.3 The SetPlaybackReadTimeLimit Command	81
5.3.4 Configuring HLA Heartbeating	82
5.3.5 Configuring HLA Timeouts	83
5.4. Setting the Dead Reckoning Algorithm on Pause	83
5.5. Configuring Network Read Time	84
5.6. Using Data Distribution Management	85
5.6.1 Specifying Subscription Regions	86
5.6.2 Using Conveyed Regions	88
5.6.3 Using Simulation Data	89
5.6.4 Configuring DDM	89
5.6.5 Configuring DDM in lgrConfig.xml	91
5.7. Setting the Notification Level	91
5.7.1 Specifying the Log File	92
5.8. Configuring Streaming Video	92
5.8.1 Video Record Settings	92
5.8.2 Video Playback Settings	93
5.8.3 Video Advanced Settings (Configuring GStreamer)	94
5.9. Disabling and Enabling Dark Mode	95
5.10. Editing lgrConfig.xml	95
Command Syntax	97
Variable Syntax	97

5.10.1 Adding a Command to <i>lgrConfig.xml</i>	98
5.11. Summary of Command-line Options for the Logger	99

5.1. Configuring the Logger

You can configure the Logger by editing the *lgrConfig.xml* configuration file, with command-line options, in the text interface, and in the GUI. With the exception of some of the command-line options, all of the ways that you can configure the Logger are essentially alternate ways of implementing Logger commands. For a complete list of command-line options, see "5.11. Summary of Command-line Options for the Logger" on page 99 or the Quick Reference Card. For descriptions of Logger commands and how to use them, see "Chapter 14. Using Logger Commands" on page 193 or the Quick Reference Card. For details about the configuration file, see "5.10. Editing *lgrConfig.xml*" on page 95.

When you change a configuration setting in the Preferences dialog box, the change is saved to *lgrConfig.xml* if the Save Configuration check box on that page is selected. If the Save Configuration check box on the Network Settings page is selected, then when you make changes in the Connection dialog box, they are saved to *lgrConfig.xml*.

This chapter describes the configuration options and shows how to implement them in the various interfaces.

5.2. Configuring Indexing

Logger files contain index data (checkpoints) that allow the Logger to quickly and efficiently jump from one time point to another.

When you jump the Logger to a time point, it jumps to the nearest checkpoint before the selected time point and then processes the packets in the file to the specified time point. (As a result, a single aggregated update is sent for each active entity.) Therefore, the efficiency of time jumps is determined by the frequency of checkpoints. Having more frequent checkpoints speeds up time jumps. However, having more checkpoints also increases file size and can slow down recording, particularly if the exercise has many entities. When you specify your checkpoint policy, you must balance your priorities.

When you record, indexing is always enabled. You can set the checkpoint policy (the criteria for how often the Logger adds index data) to one of:

- By Frequency, in packets received (default).
- By Size, in bytes.
- By Time.

You can specify that, when you export a recording, checkpoints be resampled with the current indexing policy. This allows you to change the indexing policy from that used when the file was recorded.


You can specify that interactions be saved to checkpoints. If interactions are saved, you can specify that the interaction data be sent along with state data when skipping during playback.

i If you are currently recording an exercise, changing the preferences does not affect the recording process. It takes effect for the next new file.

► **To configure indexing in the GUI:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the Indexing Settings page (Figure 14). (The Indexing Settings page is the same for HLA and DIS.)

Figure 14. Logger Preferences dialog box, Indexing Settings page

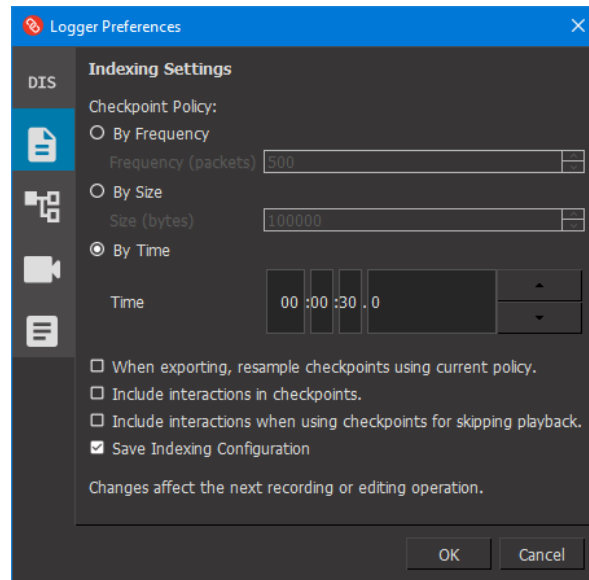

3. Select the desired checkpoint policy.
4. Edit the appropriate value for the checkpoint policy you chose (frequency, size, or time).
5. Optionally, select one or more indexing options.
6. Click OK.

5.2.1 Configuring Indexing with the Command Interfaces

- To configure indexing using a command interface, issue the `SetCheckpointParameters` command.

Table 33. Checkpointing command

Interface	Command
Command line	<code>loggerversion -r "SetCheckpointParameters 0 0 500 0"</code> For details about the parameter values, see "14.4.4 Recorder Domain Commands" on page 200.
Text interface	<code>SetCheckpointParameters 0 0 500 0</code>
<i>lgrConfig.xml</i>	Add <code>SetCheckpointParameters</code> to the configuration file.

5.3. Configuring Faster Playback

There are some processes that you can modify to allow the Logger to play back files more quickly at the expense of some data or feature loss. In certain cases, the data loss is acceptable and the improved performance is required because of the density of data or packets in the file. For example, in DIS and some HLA federations, there are entity heartbeats and timeouts. If you drop some entity state information or miss the removal of an entity, that information can be retrieved by subsequent state updates or entity timeouts.

The loss of data is likely to have a greater effect on HLA federations, which usually do not have an entity heartbeat mechanism. In HLA, the object management services inform federates about object discoveries and removals and there are services for requesting missing data. As a result, if the Logger skips data, there is no certainty that future updates will provide the missing data. More importantly—since in HLA the Logger only removes entities when it processes a removal packet—if one is skipped, an object that should have been removed will erroneously continue to persist in the federation.

In both DIS and HLA, all skipped interactions are lost. Since interactions are normally transient events, they can often be missed without great impact. However, if the exchange of interactions contains some state information, for example, transitions in a transaction protocol such as DIS logistics, then a missed interaction may leave the transaction in a bad state.

The Logger uses these commands to configure fast playback:

- `SetEntityTracking`
- `SetFastJumpsWithoutDiff`
- `SetPlaybackReadTimeLimit`

In conjunction with fast playback, use the following commands in HLA to configure the Logger to perform entity heartbeats and timeouts and support federations that have these requirements:

- `SetHeartbeatIntervals`
- `SetTimeoutIntervals`

5.3.1 The `SetEntityTracking` Command

The `SetEntityTracking` command enables or disables the entity tracking process during playback. Entity tracking keeps track of the entities in a Logger file and supplies the list of entities for the entity filter. The entity tracker is periodically updated. Eliminating this overhead increases playback speed. However, entity filtering depends on the entity tracker information, and no entities are displayed when entity tracking is disabled. Default: entity tracking is enabled.

The syntax for this command in the text interface is:

```
SetEntityTracking isEnabledValue
```

For example:

```
SetEntityTracking false
```

The syntax for using this command from the command-line is:

```
loggerversion -r "SetEntityTracking isEnabledValue"
```

For example:

```
loggerversion -r "SetEntityTracking false"
```

5.3.2 The SetFastJumpsWithoutDiff Command

The `SetFastJumpsWithoutDiff` command changes how the Logger jumps to a particular time in the file during playback. The default behavior is to first get the nearest checkpoint data. This establishes the initial conditions of the jump (that is, current entities and their state). The Logger then processes the packets from the checkpoint time up to the jump time; however, the output is disabled. The result is that the internal object state is updated and a single aggregated update is sent over the network for each active entity. This two-step process establishes the current state of the entities at the selected jump time. When you enable `SetFastJumpsWithoutDiff`, the Logger jumps immediately from the checkpoint to the jump time without processing intermediate packets. Playback in DIS can handle this fast jump because of entity state updates and entity timeouts. Default: fast jumps are disabled.

The syntax for this command in the text interface is:

```
SetFastJumpsWithoutDiff isEnabledValue
```

For example:

```
SetFastJumpsWithoutDiff true
```

The syntax for using this command from the command-line is:

```
loggerversion -r "SetFastJumpsWithoutDiff isEnabledValue"
```

For example:

```
loggerversion -r "SetFastJumpsWithoutDiff true"
```

5.3.3 The SetPlaybackReadTimeLimit Command

The `SetPlaybackReadTimeLimit` command limits the time the Logger can read packets from a file and drops the remaining packets up to the current time. The Logger records each packet with a relative timestamp from the beginning of the file. When playing back a file, the Logger reads all of the packets that have timestamps less than or equal to the current time. There is no time limit for the length of this read operation. It is possible that the density of a file may be such that the Logger takes too long to read all of the packets. The result is that the Logger begins to lag behind the selected playback speed.

A simple example of how this can happen is when the Logger playback speed is increased such that the Logger cannot read all the packets and maintain the selected speed. This lagging behavior could also happen if a very fast machine records the file and a slow machine is used to play it back or a lightly loaded and then heavily loaded machine. In any case, if the file or playback speed is consistently too dense for the Logger to play back, it falls further and further behind.

Setting a read time limit causes the Logger to cut off the read time as needed to maintain the selected speed. However, like the fast jump, the Logger discards data and it should only be employed when dropped data is not a concern or can be recovered by subsequent updates. This trade-off is a bit more drastic in that the Logger may continually drop packets and, while unlikely, the distribution of the packets in the file may be such that some entities may update sporadically or not at all. The default configuration disables the read time limit and allows the Logger to take whatever time necessary to read all of the packets up to the current time.

When you set the read time limit, consider the tick rate. The Logger uses the tick rate (really a tick interval) to periodically schedule Logger activity. The Logger starts a read operation (which includes playback of those packets) and, when complete, it sleeps a period of time. The sleep allows other processes to run, such as the Logger GUI. The sleep interval is established by the tick rate minus the time required to process the read operation. In this way, the Logger performs the reads at regular intervals. A candidate value for the read time limit is a value slightly less than the tick rate. In this way, the Logger is assured of completing the read operation before the next scheduled tick time.

This command takes a floating point argument. A value less than or equal to zero disables the behavior. The syntax for this command in the text interface is:

```
SetPlaybackReadTimeLimit timeLimitValue
```

For example:

```
SetPlaybackReadTimeLimit 0.2
```

The syntax for using this command from the command-line is:

```
loggerversion -r "SetPlaybackReadTimeLimit timeLimitValue"
```

For example:

```
loggerversion -r "SetPlaybackReadTimeLimit 0.2"
```

5.3.4 Configuring HLA Heartbeating

HLA entity heartbeating sends a complete update of all the object attributes at a specified interval. The Logger will perform dead-reckoning for entity and aggregate publishers if it is using the internal RPR FOM FOM Mapper or a FOM Mapper library that maps to these publishers. If not, the last known values are used.

HLA heartbeating is configured with the `SetHeartbeatIntervals` command.

`SetHeartbeatIntervals` takes as an argument a space-separated set of class heartbeat intervals. Each interval is specified in the form "*className:interval:inheritable*", for instance "ObjectRoot:5.0:true".

The Logger sends a heartbeat for each object as specified by its class interval parameter. If an interval is not specified for an object class, the Logger uses the closest parent class for which there is an interval and the class specified inheritable as true. For example, if all classes are a subclass of ObjectRoot and you want all classes to heartbeat every 5.0 seconds, "ObjectRoot:5.0:true" configures this without requiring every class to be individually listed.

If an object's class specifies a zero interval or the interval is not specified and there is no inheritable interval available, objects of that class do not heartbeat.

The syntax for this command in the text interface is:

```
SetHeartbeatIntervals "className:interval:inheritable ..."
```

You can specify as many classes as needed. Each specification must be separated by a space. For example:

```
SetHeartbeatIntervals "ObjectRoot:5.0:true  
ObjectRoot.BaseEntity.PhysicalEntity:4.0:true"
```

5.3.5 Configuring HLA Timeouts

You can configure the HLA Logger to time out entities. When recording, if the Logger does not receive an update from a known entity within its timeout interval, it behaves as though the entity has been removed. The timeout interval is conventionally the heartbeat interval multiplied by 2.5.

To configure HLA timeouts, use the `SetTimeoutIntervals` command. This command takes, as an argument, a space-separated set of class timeout intervals. Each interval is specified in the form `"className:interval:inheritable"`, for example, `"ObjectRoot:12.5:true"`.

The Logger removes known objects based on the object's class timeout parameter. If a timeout is not specified for an object class, the Logger uses the closest parent class for which there is a timeout and the class specified inheritable as true. For example, if all classes are a subclass of `ObjectRoot` and you want all classes to timeout after 12.5 seconds, `"ObjectRoot:12.5:true"` specifies this without requiring every class to be individually listed.

If an object's class specifies a zero timeout or the timeout is not specified and there is no inheritable timeout available, objects of that class do not time out.

The syntax for this command in the text interface is:

```
SetTimeoutIntervals "className:interval:inheritable ..."
```

You can specify as many classes as needed. Each specification must be separated by a space. For example:

```
SetTimeoutIntervals "ObjectRoot:12.5:true  
ObjectRoot.BaseEntity.PhysicalEntity:15.0:true"
```

5.4. Setting the Dead Reckoning Algorithm on Pause

When you pause playback of a Logger file, the Logger sets the Frozen bit for each simulation object. If a receiving application respects the Frozen bit, it stops dead-reckoning the simulation objects. If it does not, however, it may continue to dead-reckon them, which results in incorrect representation of the state of the simulation. To help with this possible problem, when you pause playback, the Logger sets the dead-reckoning algorithm to static, which stops dead-reckoning in the receiving applications.

You can disable this change to the dead-reckoning algorithm. If you make this change, it is up to you to ensure that your applications handle dead-reckoning properly.

► **To enable or disable changing the dead-reckoning algorithm on pause:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the DIS Configuration or HLA Configuration page, as appropriate.
3. Select or clear the Set Static Dead Reckon Algorithm on Pause check box.
4. Click OK.

5.5. Configuring Network Read Time

You can specify how much time to spend reading messages from the network. Setting a maximum time can prevent the Logger from becoming unresponsive when it is flooded with messages. The options for Network Settings are:


- Read All Messages (HLA) or Read All PDUs (DIS). When selected, during each tick the Logger reads all messages in the queue.
- Max Read Time. Specifies the maximum time to spend reading messages each tick.
- Min Read Time (HLA only). Specifies the minimum amount of time to spend reading messages each tick.

Num PDUs Per Check (DIS only). Specifies the maximum number of PDUs to read before checking to see if the Max Read Time has been reached.

 Max Read Time, Min Read Time, and Num PDUs Per Check are not available when Read All Messages is selected.

► **To configure network read settings:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the Network Settings page (Figure 15). (The Network Settings page is similar in DIS and HLA.)

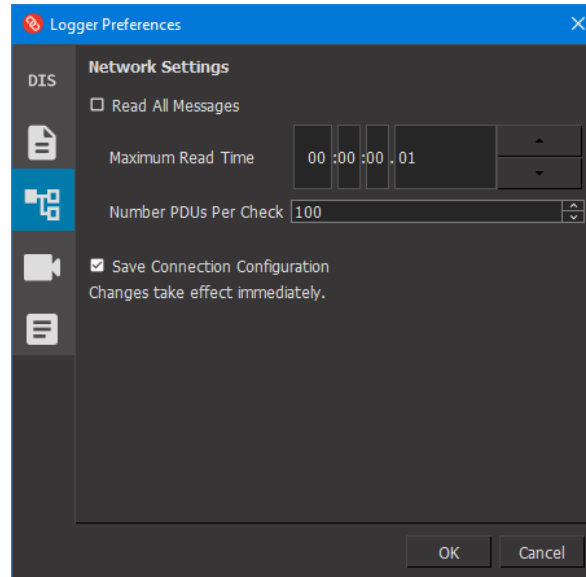Figure 15. Logger Preferences dialog box, Network Settings page

3. To read all messages in each tick, select Read All Messages (for HLA) or Read All PDUs (for DIS).
4. To specify the maximum amount of time to read messages, clear Read All Messages and type a value for Max Read Time.
5. To specify the minimum amount of time to read messages (HLA only), clear Read All Messages and enter a value for Min Read Time.

To specify the maximum number of PDUs to read before checking Max Read Time (DIS only), clear Read All Messages and type a value for Num PDUs Per Check.

6. Click OK.

5.6. Using Data Distribution Management

The Logger can record and play back using HLA Data Distribution Management (DDM). There are two general use cases for configuring DDM with the Logger. The first case uses the HLA DDM conveyed region information to record and play back using DDM regions. The second case supports creating a plug-in to inspect the simulation data to create and update regions. The DDM configuration parameters control which of these approaches is supported and they allow some variation in how they are supported.

In both cases, you can configure the Logger to use either global region subscriptions (*subscribeMode* = **SubscribeRegionsAreGlobal**) or specific region subscriptions (*subscribeMode* = **SubscribeRegionsAreSpecified**). When the Logger subscribes using global regions, it uses an appropriate region with global extents for each class subscription to receive all possible data from the federation. This subscription mode requires no further configuration other than setting the *subscribeMode* parameter in the *SetDdmParameters* command.

You can configure the Logger with specific region subscriptions to restrict the data that the Logger records, or segregate the data among several Loggers, each specifying different region extents. This subscription mode requires a subscription specification file, as described in "5.6.1 Specifying Subscription Regions" on the next page.

5.6.1 Specifying Subscription Regions

The specification of subscription regions can be read from a configuration file using the `LoadSubscriptionListFile` command. You can include it in the Logger configuration file in the startup section:

```
<command domain="Simulation" protocol="HLA 13"
command="LoadSubscriptionListFile">
  <param name="filename" var="subscriptionListFile"></param>
</command>
```

A subscription list file has a list of region descriptors, a list of region sets, and a list of associations between region sets and object and interaction classes. Region descriptors specify the lower and upper bounds of each dimension in the region. The bound values are the normalized values used by the RTI. For the HLA 1.3 specification, the region descriptor includes the routing space name and must specify the bounds for all the dimensions in the routing space.

This example configuration associates regions with object and interaction classes:

```
<?xml version="1.0" encoding="utf-8"?>
<subscriptionList>
  <regionList name="subRegionList">
    <region name="Region1">
      <space>RoutingSpaceName</space>
      <extent>
        <dimension name="Dim1">
          <lowerBound>0</lowerBound>
          <upperBound>20000</upperBound>
        </dimension>
        <dimension name="Dim2">
          <lowerBound>0</lowerBound>
          <upperBound>20000</upperBound>
        </dimension>
      </extent>
    </region>
    <region name="GlobalRegion">
      <space> RoutingSpaceName </space>
      <extent>
        <dimension name="Dim1">
          <lowerBound>0</lowerBound>
          <upperBound>4294967293</upperBound>
        </dimension>
        <dimension name="Dim2">
          <lowerBound>0</lowerBound>
          <upperBound>4294967293</upperBound>
        </dimension>
      </extent>
    </region>
  </regionList>
```

```

<!-- Each region set contains one or more regions. -->

<regionSetList name="subRegionSetList">
  <regionSet name="Region1Set">
    <region>Region1</region>
  </regionSet>

  <regionSet name="GlobalRegionSet">
    <region>GlobalRegion</region>
  </regionSet>
</regionSetList>

<!-- In the object and interaction class lists, if a class -->
<!-- is not associated with a specific region set, it uses -->
<!-- the region set specified by allObjectClasses or -->
<!-- allInteractionClasses. If the all*Classes parameter is -->
<!-- omitted, and SetDdmParameters subscribeUnspecifiedAttributes --
>
<!-- is disabled, only those classes that are explicitly -->
<!-- associated with a region set are subscribed. -->

<classList name="objectClassList">
  <allObjectClasses regionSet="GlobalRegionSet"/>
  <objectClass
regionSet="RegionSet1">ObjectRoot.Class1</objectClass>
  <objectClass regionSet="RegionSet1">
ObjectRoot.Class2</objectClass>
</classList>

<classList name="interactionClassList">
  <allInteractionClasses regionSet="GlobalRegionSet"/>
  <interactionClass
regionSet="RegionSet1">InteractionRoot.Class1 </interactionClass>
  <interactionClass
regionSet="RegionSet1">InteractionRoot.Class2 </interactionClass>
</classList>
</subscriptionList>

```

If individual attributes of a class must be associated with specific regions, then the regions can specify those attributes:

```

<region name="Region1">
  <space>RoutingSpaceName</space>
  <extent>
    <dimension name="Dim1">
      <lowerBound>0</lowerBound>
      <upperBound>20000</upperBound>
    </dimension>
  </extent>
</region>

```

```
<dimension name="Dim2">
    <lowerBound>0</lowerBound>
    <upperBound>20000</upperBound>
</dimension>
</extent>
<attribute class="ObjectRoot.Class1" name="Attribute1"/>
<attribute class="ObjectRoot.Class1" name=" Attribute2"/>
<attribute class="ObjectRoot.Class1" name=" Attribute3"/>
</region>
```

You must define a separate region for each set of class attributes for a given class and the class must still be associated with the region in the object class list. The class is subscribed with the specified list of attributes and region. If any attributes of the class are left unspecified and the **subscribeUnspecifiedAttributes** parameter is disabled, they are not subscribed.

Loading the Subscription List Using the API

The subscription list file described in the previous section can be loaded through the API:

```
void loadSubscriptionFile(DtLogger* logger, const DtString& fileName)
{
    DtSubscriptionListFile* sublist = DtSubscriptionListFile::create
();
    sublist->readFromFile(fileName);
    logger->simManager()->setSubscriptionList(*sublist);
    delete sublist;
}
```

Alternatively, the subscription list can be constructed incrementally. For details, please visit the support portal at <https://www.mak.com/support>.

5.6.2 Using Conveyed Regions

The HLA DDM service supports the concept of conveyed regions. Conveyed regions provide the receiving federate the region extents associated with the reflected attributes or received interactions at the time the data was sent. By recording these conveyed region extents, the Logger can reproduce the regions during playback.

You can configure the Logger to record the conveyed region information. This region information can then be used during playback to create regions, update regions, and switch object attributes between regions. The conveyed regions provided by the RTI during Federate Ambassador callbacks specify the region extents that were active when the object instance attributes were updated or the interaction was sent. The Logger records these region extents with the received data. When playing back a file with region information, the Logger can send the data using the recorded region extents. Because the region information was provided by the RTI and recorded by the Logger, it is not necessary to inspect the data in order to create and update regions. The Logger replicates the same region extents as when the data was sent by the original federate.

① To record conveyed region information, the RTI must be configured to deliver the conveyed region information in the Federate Ambassador callbacks. See the appropriate RTI documentation for enabling this HLA feature.

5.6.3 Using Simulation Data

The Logger plug-in API provides class methods used in the playback process that can be overridden to inspect the outgoing data to create and update regions to support DDM. DDM regions are used to send interactions and they are associated with object instance attributes. The interaction data can be inspected to select a region and then the region extents can be modified prior to sending the interaction. The object data can be inspected when the object publisher is created in order to select the regions used to register the object. As the object is updated, the region extents can be modified or the attributes can be associated with different regions.

5.6.4 Configuring DDM

The DDM settings are set using the `SetDdmParameters` command in the Logger configuration file, text interface, or on the command line. The syntax for this command in the text interface is:

```
SetDdmParameters enableDdm playbackMode subscribeMode
                  playbackDynamicAssociation playbackDynamicExtents
                  allowPlaybackWithoutRegions recordConveyedRegions
                  requestUpdates subscribeUnspecifiedAttributes
```

For example:

```
SetDdmParameters true PlaybackRegionsUseConveyedExtents
SubscribeRegionsAreGlobal true false true true true true
```

The parameters for the `SetDdmParameters` command are:

- *enableDdm*. Enable record and playback using DDM. Default: false.
- *playbackMode*. Supported modes are:
 - **PlaybackRegionsUseConveyedExtents**. During playback, regions are created and updated using recorded region data.
 - **PlaybackRegionsUseData**. Regions are created and updated by inspecting simulation data. Requires a plug-in.
 - **PlaybackRegionNotEnabled** (default). Updates and interactions are sent without regions.

- *subscribeMode*. Supported modes:
 - **SubscribeRegionsAreGlobal**. DDM subscriptions are made with global regions with extents of global min and max.
 - **SubscribeRegionsAreSpecified**. The regions are specified through subscription configuration files. (For details, see the `LoadSubscriptionListFile` command.) The subscription region configuration can also be specified programmatically through the Logger plug-in API.
 - **SubscribeRegionNotEnabled** (default). Subscriptions are performed without regions.
- *playbackDynamicAssociation*. During playback, the association of regions with object instance attributes can be fixed or dynamic. If it is known that region associations with attribute instances never change, the overhead of checking for changes can be eliminated. This parameter should be disabled if possible. Default: false.
- *playbackDynamicExtents*. During playback, the region extents can be fixed or dynamic. The conventional notion of DDM regions regards them as dynamically changing extents to reflect the state of simulation data (for example, surrounding an entity's position). An alternative approach is for the regions to be fixed and the object attribute instances move from region to region. If it is known that region extents never change, the overhead of checking for changes can be eliminated. This parameter should be disabled if possible. Default: false.
- *allowPlaybackWithoutRegions*. During playback, it may happen that a region association cannot be established. In these cases, the Logger sends the data without region association. Disable this parameter if the federation agreement requires that all data must be transmitted with associated regions. Default: true.
- *recordConveyedRegions*. Enable this parameter to record conveyed regions. Default: True.
- *requestUpdates*. Requesting updates can result in spikes in network traffic, especially since it is often performed by late joining federates when the exercise is already populated with many objects. In some DDM federations, object heartbeats are used instead of update requests. Disable this parameter to prevent the Logger from making requests for updates.



The Logger does not use region information to perform update requests. The default value is True.

- *subscribeUnspecifiedAttributes*. The Logger may not be able to determine a region association to apply to an interaction class or object class attribute subscription. This situation may occur if the interaction or class does not specify a routing space or dimension in the FOM. It can also happen if the *subscribeMode* is configured as **SubscribeRegionsAreSpecified**, but some classes or attributes are left unspecified. By default, the Logger subscribes to these interaction classes and object class attributes without using a region association (in effect a global subscription). Disable this parameter if the Logger should only subscribe when a region association can be used. Default: true.

5.6.5 Configuring DDM in *lgrConfig.xml*

This is an example of configuring DDM in the Logger configuration file:

```
<defaults>
*
*
*
  <var name="playbackModeString" type="string"
    value="PlaybackRegionsUseConveyedExtents"/>
  <!-- <var name="playbackModeString" type="string"
    value="PlaybackRegionUsesData"/> -->
  <var name="subscribeModeString" type="string"
    value="SubscribeRegionsAreGlobal"/>
  <!-- <var name="subscribeModeString" type="string"
    value="SubscribeRegionsAreSpecified"/> -->
  <var name="True" type="bool" value="true"/>
  <var name="False" type="bool" value="false"/>
</defaults>

<commands name="startup">
*
*
*
  <command domain="Simulation" protocol="HLA 13"
    command="SetDdmParameters">
    <param name="enableDdm" var="False"></param>
    <param name="playbackMode" var="playbackModeString"></param>
    <param name="subscribeMode" var="subscribeModeString"></param>
    <param name="playbackDynamicAssociation" var="True"></param>
    <param name="playbackDynamicExtents" var="False"></param>
    <param name="allowPlaybackWithouRegions" var="True"></param>
    <param name="recordConveyedRegions" var="True"></param>
    <param name="requestUpdates" var="True"></param>
    <param name="subscribeUnspecifiedAttributes" var="True"></param>
  </command>
</commands>
```

5.7. Setting the Notification Level

The notification level determines the verbosity of informational messages that the Logger generates. The range is 0–4, with 0 being least verbose. Some informational messages are generated by the Logger application and some are generated by the VR-Link libraries it is built against. You can set the notification level for each message source independently.

- To configure the Logger notification level using a command interface, issue the `-m` (for Logger messages) and `-n` (for VR-Link messages) command-line options or the `SetNotifyLevel` command.

Table 34. Notification level commands

Interface	Command
Command line	<code>loggerversion -m 2 -n 2</code> or <code>loggerversion -r "SetNotifyLevel 2 2"</code>
Text interface	<code>SetNotifyLevel 2 2</code>
<i>lgrConfig.xml</i>	The <code>SetNotifyLevel</code> command is in the default configuration file.

5.7.1 Specifying the Log File

The Logger sends notification messages to a log file. The default log file is *logger.log*. If you assign a log file a name with the extension *.lgr*, the Logger adds a *.log* extension to ensure that the log file is not confused with a Logger file, or worse, overwrites a file.

- To configure the log file, issue the `-l` command-line option.

Table 35. Specifying the log file

Interface	Command
Command line	<code>loggerversion -l mylogfile.log</code>
Text interface	None.
<i>lgrConfig.xml</i>	The <code>logFileName</code> variable is in the default configuration file.

5.8. Configuring Streaming Video


You can change the default settings for recording and playing video and you can configure GStreamer.

5.8.1 Video Record Settings

You can configure whether video recording is enabled at startup and you can specify the port to use.

- To configure video recording:

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the Video Settings page (Figure 16).

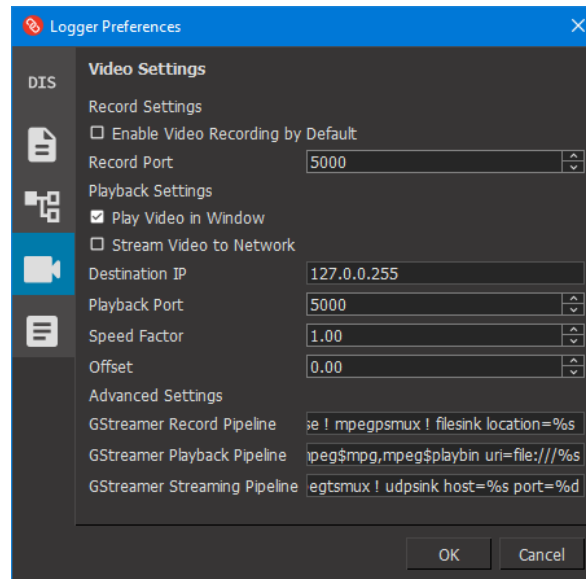Figure 16. Video Settings page

3. To enable video recording at startup, select the Record Videos check box. To disable it, clear the check box.
4. To set the port used for recording, change the value in the Record Port box.
5. Click OK.

5.8.2 Video Playback Settings

You can enable or disable video playback at startup and whether to stream to the network. You can also set these parameters:

- Port. The port to which to stream video over the network.
- Destination IP address. The destination IP address of the stream. This value should be an appropriate device IP, multicast IP, or broadcast IP.

i Only one consumer can read a video stream sent to a device IP address.

- Speed Factor. If the video and data recordings are not synchronized, you can adjust the speed of video playback relative to the data playback to try to synchronize them. This factor is applied in addition to any changes to the data playback rate. Default: 1.
- Offset. If the video file starts before or after the data recording, you can specify an offset for the video so that it starts at the correct time relative to the data. Default: 0.

i The Speed Factor and Offset affect all videos. Therefore, if you need to set them for a particular video, you should reset them to the default values before running other videos.

► **To configure video playback:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the Video Settings page (Figure 16 on the previous page).
3. To enable or disable video playback in the Logger window at startup, select or clear the Play Video in Window check box.
4. To enable or disable playing video to the network, select or clear the Stream Video to Network check box.
5. To specify an destination IP address, enter an IP address in the Destination IP box.
6. To specify the port for playback, enter a value in the Playback Port box.
7. To set a speed factor to synchronize video to data, enter a value in the Speed Factor box.
8. To set an offset to synchronize a video and data recording, enter a value in the Offset box.
9. Click OK.

5.8.3 Video Advanced Settings (Configuring GStreamer)

Video streaming in the Logger uses the open source library GStreamer. GStreamer provides many options that allow it to record different video files and to resize, transform, complex, and multiplex the video. The default pipelines support video files containing a single video stream using the MPEG format.

You can change the configuration used by the Logger by editing the record and playback pipelines. Do not edit them unless you are familiar with building GStreamer configuration pipelines. For information about GStreamer and how to build a configuration pipeline, please visit <https://gstreamer.freedesktop.org>.

If you modify a pipeline and want to return it to its original text, you can copy the appropriate text string from one of the protocol-specific configuration files in `./data/config`. Copy the text either to the similar configuration file in `./bin64` or paste the text string into the correct pipeline box on the Logger Preferences dialog box, Video Settings page.

The lines to look for in the configuration file are:

```
<!-- %s in record pipeline is replaced with logger tape file with  
".lgr" extension stripped %d is replaced with the port -->  
<var name="mediaRecordType" type="string" value="mpeg$mpg$udpsrc  
port=%d ! tsdemux ! mpegvideoparse ! mpegtsmux ! filesink  
location=%s"/>
```

```
<!-- %s in playback pipeline is replaced with media file name -->  
<var name="mediaPlayInwindowType" type="string"  
value="mpeg$mpg,mpeg$playbin uri=file:///%">
```

```
<!-- %s in record pipeline is replaced with output host  
%d is replaced with the output port -->  
<var name="mediaPlayToStreamType" type="string"  
value="mpeg$mpg,mpeg$video/x-raw,framerate=25/1 ! videoconvert ! avenc_  
mpeg2video ! mpegtsmux ! udpsink host=%s port=%d"/>
```

i The configuration file also contains an H264 configuration, which is commented out. The H264 configuration provides better video quality, but MPEG provides better support for jumping to different locations in the video.


5.9. Disabling and Enabling Dark Mode

Dark mode is the default in Logger's graphical user interface. Light mode, the former standard, is also available.

► To switch the GUI from dark mode to light mode:

1. Choose **Options > Preferences**.
2. Select the General Application Settings page.

Figure 17. General Application Settings

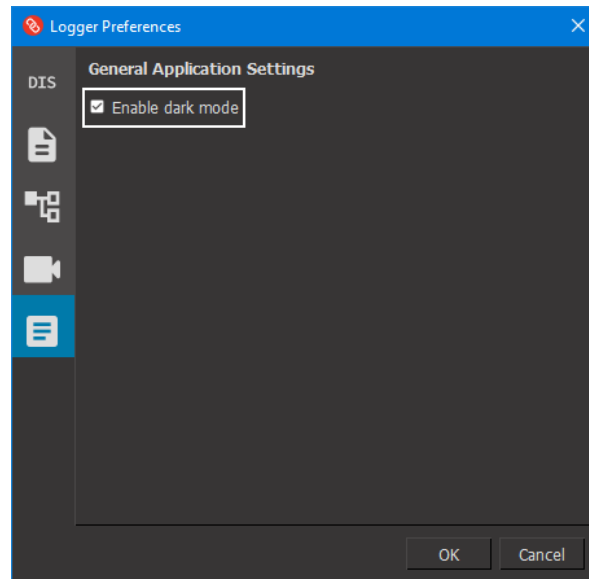

3. Clear the Enable Dark Mode check box. The window immediately changes from dark mode to light mode. (Or select the Enable Dark Mode check box to see the window change from light to dark.)

5.10. Editing lgrConfig.xml

The *lgrConfig.xml* file contains commands that run when you start the Logger. The default configuration file starts the Logger with initialization commands to load plug-ins and connect to the DIS or HLA network.

The *./bin64* directory has a version of *lgrConfig.xml* for each version of the Logger. The file name includes the protocol, for example *lgrConfigDIS.xml* and *lgrConfigHLA1516.xml*. Default versions of *lgrConfig.xml* are in *./data/backups*. You can also use a default version by specifying it with the `--configFile` command-line option.

The file is written using XML syntax. It has essentially two sections – variable definitions and commands. Variable definitions are specified in the <defaults> block. Commands are specified with a series of <command> entries within one of two <commands> blocks. You can use any Logger command in a configuration file. (For a list of commands, see "14.4. Command Descriptions" on page 196.)

 Some command-line options have a matching variable name in the <defaults> section of the configuration file. If you change or remove the name of one of the variables in the default configuration file, it will break the command-line option associated with it.

Additionally, if you add a new variable and give it a name that matches an existing command-line argument, you will experience unexpected behavior. Be careful about naming new variables to eliminate any risk of this error occurring.

This is a heavily edited version of a configuration file for HLA that shows the main components:

```
<lgrConfig>
  <!-- variable formatting -->
  <defaults>
    <var name="messageLevel" type="int" value="2"/>
    <!-- HLA Settings -->
    <var name="execName" type="string" value="MAK-RPR-2.0"/>
    <var name="federateName" type="string" value="MAK Logger"/>
    <var name="fedFileName" type="string" value="MAK-RPR2-1-10.fed"/>
    <var name="fomMapperLib" type="string" value=""/>
    <var name="fomMapperData" type="string" value=""/>
    <var name="rprFomVersion" type="double" value="2.0"/>
    <var name="rprFomRevision" type="int" value="1"/>
    <var name="ignoreAdvisoriesValue" type="bool" value="false"/>
    <var name="useEmptyFomMapperValue" type="bool" value="false"/>
  </defaults>

  <!-- Initialize commands executed after the command line is
    parsed -->
  <!-- Parameter variables must be defined in the defaults group -->
  <commands name="init">
    <command domain="System" protocol="None"
      command="SetNotifyLevel">
      <param name="lgrLevel" var="messageLevel"></param>
    </command>
  </commands>

  <commands name="startup">
    <command domain="Simulation" protocol="HLA 13"
      command="SetConnectionParameters">
      <param name="federateName" var="federateName"></param>
      <param name="federationName" var="execName"></param>
      <param name="fedFile" var="fedFileName"></param>
      <param name="fomVersion" var="rprFomVersion"></param>
```

```

    <param name="fomRevision" var="rprFomRevision"></param>
    <param name="fomMapper" var="fomMapperLib"></param>
    <param name="fomMapperData" var="fomMapperData"></param>
    <param name="ignoreAdvisories" var="ignoreAdvisoriesValue">
      </param>
    <param name="useEmptyFomMapper" var="useEmptyFomMapperValue">
      </param>
  </command>
  <command domain="Simulation" protocol="None" command="Connect"/>
</commands>
</lgrConfig>

```

Command Syntax

Commands that do not take arguments have the format:

```
<command domain="domain" protocol="protocol" command="command" />
```

where:

- *domain* is System, Player, Recorder, Editor, or Simulation. See "14.4. Command Descriptions" on page 196 for a list of commands by domain.
- *protocol* is None, DIS, HLA 13, HLA 1516, or HLA 1516e.
- *command* is the command you want to run, from the list of supported commands in "Chapter 14. Using Logger Commands" on page 193.

This is an example of a command that does not take arguments:

```
<command domain="Simulation" protocol="None" command="Connect"/>
```

Commands that take arguments have the format:

```

<command domain="domain" protocol="protocol" command="command">
  <param name="name" var="variableName"></param>
</command>

```

where:

- *name* is the name of a command argument as listed in the command descriptions in "14.4. Command Descriptions" on page 196.
- *variableName* is the user-defined name of a variable that is to be defined in the <defaults> section of the configuration file.

This is an example of a command that takes arguments:

```

<command domain="System" protocol="None" command="SetNotifyLevel">
  <param name="lgrLevel" var="messageLevel"></param>
</command>

```

Variable Syntax

Variable entries take the format:

```
<var name="variableName" type="type" value="value" />
```

where:

- *variableName* is a variable that is specified by a command in the commands section of the configuration file.
- *type* is the argument type for the variable, as defined for each command argument in "14.4. Command Descriptions" on page 196.
- *value* is the value you want to assign to the variable.

For example:

```
<var name="messageLevel" type="int" value="2"/>
```

5.10.1 Adding a Command to *lgrConfig.xml*

When you add a command to the configuration file, you will usually add it to the startup commands section. The only time you would add a command to the init section is if you are adding a command to load a plug-in.

Suppose that you want to add the `NewFile` command to *lgrConfig.xml*. This command creates a new file for recording. If you add it to the configuration file, every time you start the Logger, it will create a new file with the specified name.

1. Add a new command in the `<commands name="startup">` section, similar to:

```
<commands name="startup">
  <command domain="Recorder" protocol="None" command="NewFile">
    <param name="filename" var="newfile"></param>
  </command>
</commands>
```

In the command definition, the domain is `Recorder`, which you know because `NewFile` is listed with the commands in the `Recorder` domain in "14.4. Command Descriptions" on page 196. Protocol is `None`, because the command is protocol independent. The command is `NewFile`.

The command definition shows that `NewFile` takes an argument, `filename`, of type string. Therefore, add a parameter definition to the command. The name is `filename`. This must be exactly the same spelling as in the definition. The variable name is a user-defined name that will be defined in the variable definition.

2. Add a variable definition for the variable `newfile`, similar to:

```
<var name="newfile" type="string" value="newfilename.lgr"/>
```

The name, `newfile`, matches the variable name in the command entry. The type is the type listed in the command definition. The value is the one you want to assign, in this case, the name you want to give to the Logger file that will be created on startup.

Adding a String List to *lgrConfig.xml*

Some commands require specification of multiple strings, for example, the list of common entity types in the configuration file for DIS. As with other commands, you specify a variable to take the data. Then you provide the strings as a list of listitems. For example, here is how you could specify a subscription list for HLA:

1. In the command section of the configuration file, add an entry for the `SetSubscriptionLists` command:

```
<!-- To Disable auto-connection remove this command -->
<command domain="Simulation" protocol="None"
      command="Connect"/>
</commands>

<command domain="Simulation" protocol="HLA 13"
      command="SetSubscriptionLists">
  <param name="objectClasses"
        var="objectSubscriptionList"></param>
  <param name="interactionClasses"
        var="interactionSubscriptionList"></param>
</command>
```

Since the `SetSubscriptionLists` command takes two arguments, we define two parameters for it.

i We include the `Connect` command, which is in the default configuration file, because the Logger must be connected before you can issue a `SetSubscriptionLists` command. When you use Logger commands, you must take into account any prerequisites that they have.

2. Add a variable definition for each of the parameters defined in the command. Within each variable definition, include a listitem for each string you want to include in the list.

```
<var name="objectSubscriptionList" type="list"
      listtype="string">
  <listitem>ObjectRoot.BaseEntity.PhysicalEntity.Platform.
    Aircraft
  </listitem>
  <listitem>ObjectRoot.BaseEntity.PhysicalEntity.
    Radio</listitem>
</var>

<var name="InteractionSubscriptionList" type="list"
      listtype="string">
  <listitem>InteractionRoot.WeaponFire</listitem>
</var>
```

i The subscription list created by this example is identical to the one that would be created by the example command in "14. Using Logger Commands" on page 193 and "14.3. Using Logger Commands in the Text Interface" on page 195.

5.11. Summary of Command-line Options for the Logger

Table 36 lists command-line options. Command-line options override the comparable settings in the *lgrConfig.xml* file.

Table 36. Command-line options

Option	Description
<code>--allowAllRemoteControl mode</code>	Specifies the response to remote control PDUs. 1 = Allow 2 = Do not allow
<code>(-c --showConsole) mode</code>	Enables (1) or disables (0) display of a console window.
<code>--configFile filename</code>	Specifies the configuration file to load.
<code>--defaultTapeDir directory</code>	Specifies the default directory for Logger files.
<code>filename</code>	Specifies a Logger file to load. This option uses an implicit <code>-r OpenFile</code> . If a filename starts with a hyphen (-), you must use the <code>-r OpenFile</code> syntax.
<code>--filterEntityTypes entity_type</code>	Specifies an entity type to be added to the Filter by Entity Type dialog box. Filtering will automatically be enabled. Can be used multiple times.
<code>(-G --locale) language</code>	Specifies the locale (for localization).
<code>(-h --help)</code>	Displays a brief summary of Logger command-line arguments.
<code>(-- --ignore_rest)</code>	Ignore all arguments after this one.
<code>(-l --logFileName) filename</code>	Specifies a file to send notification messages to. Default: <i>logger.log</i> .
<code>--loggerTickRate rate</code>	The interval for the Logger tick rate, in milliseconds. For more information, see "5.3.3 The SetPlaybackReadTimeLimit Command" on page 81.
<code>(-m --messageLevel) level</code>	Specifies the notification level for Logger messages for the log file. Range: 0–4 where 4 shows all messages.
<code>(-n --notifyLevel) level</code>	Specifies the notification level for VR-Link messages for the log file. Range: 0–4 where 4 shows all messages.
<code>--remoteControlId ID</code>	Specifies the Logger's remote control ID. By default the value is assigned the Logger's site ID. This value is used if <code>SetRemoteControlSettings allowAllRemoteControl</code> is disabled.
<code>(-r --runCommand) command</code>	Specifies a Logger command to run. You can specify <code>-r</code> multiple times. For more information, see "14. Using Logger Commands" on page 193.
<code>(-v --version)</code>	Displays version information and exits.

Table 36. Command-line options (continued)

Option	Description
HLA Only	
<code>--disableTMTesting <i>mode</i></code>	Disable time management for testing.
<code>--enableTrafficAnalyzer <i>mode</i></code>	Enable (1) or disable (0) the HLA Traffic Analyzer.
<code>(-f --fomMapperLib) <i>libname</i></code>	Specifies the FOM Mapper to use if you are not using the default FOM. For details about how the Logger chooses the FOM Mapper, see "4.2.10 Specifying a FOM Mapper" on page 63.
<code>--federateType <i>type</i></code>	Specifies the federate type for the Logger federate.
<code>--filterObjectNames <i>names</i></code>	Filter the listed object names. Accepted multiple times.
<code>--fomMapperData <i>data</i></code>	Specifies FOM Mapper initialization data, if required.
<code>--fomModules <i>module</i></code>	Specifies a FOM module for the exercise. (accepted multiple times, HLA Evolved only)
<code>(-F --fedFileName) <i>fedfile</i></code>	Specifies the FED file for the exercise.
<code>--ignoreAdvisories <i>mode</i></code>	Specifies whether (1) or not (0) the Logger ignores advisory messages.
<code>--maxDrainInputTime <i>time</i></code>	Specifies the maximum time to drain input.
<code>--MIM <i>MIM_file</i></code>	Specifies the MIM (MOM and Initialization Module) for the exercise. (HLA Evolved only)
<code>(-N --federateName) <i>federate_name</i></code>	Specifies the federate name for the Logger federate. (HLA Evolved only)
<code>--rprFomVersion <i>version</i></code>	Specifies the version of the RPR FOM to use.
<code>--rprFomRevision <i>revision</i></code>	Specifies the FOM revision to use.
<code>--timeConstrainingRecording <i>mode</i></code>	Use time constrained for recording.
<code>--timeRegulatingPlayback <i>mode</i></code>	Use time regulating for playback
<code>--useEmptyFomMapper <i>mode</i></code>	Specifies whether (1) or not (0) the Logger uses an empty FOM Mapper. For details about how the Logger chooses the FOM Mapper, see "4.2.10 Specifying a FOM Mapper" on page 63.
<code>(-x --execName) <i>ExName</i></code>	Specifies the federation execution name. Default: VR-Link.

Table 36. Command-line options (continued)

Option	Description
DIS Only	
(-A --destAddrString) <i>address</i>	Specifies the default IP address to which the Logger sends PDUs. If this option is not used, the Logger uses the computer's broadcast address. See "4.3.6 Specifying a Destination Address for Outgoing and Incoming Data" on page 72.
(-a --appNumber) <i>appnumber</i>	Specifies the application number.
(-D --deviceAddrString) <i>address</i>	Specifies the network interface address if your computer has more than one network card.
--disVersion <i>num</i>	Specifies the DIS protocol version for PDUs sent onto the network. <i>num</i> can be 4 (DIS 2.0.4), 5 (IEEE 1278.1), or 6 (DIS 2.1.4, IEEE 1278.1a):
(-e --exerciseId) <i>ID</i>	Specifies the exercise ID.
--filterEntityIds <i>IDs</i>	Filter the specified entity IDs. Accepted multiple times.
--mcastTtl <i>ttl</i>	Specifies the multicast time-to-live.
(-P --disPort) <i>port</i>	Specifies which DIS port (UDP port if -A not specified, otherwise, TCP) the Logger uses to send or receive data. Default: 3000.
--recvBufferSize <i>size</i>	Specifies the receive buffer size.
(-S --mcastAddresses) <i>addresses</i>	Subscribes the Logger to the specified multicast address. To subscribe to several multicast addresses, use this option more than once on the command line.
--sendBufferSize <i>size</i>	Specifies the send buffer size.
(-s --siteId) <i>ID</i>	Specifies the site ID.



6. Starting the Logger

This chapter explains how to use the Logger's core features from the GUI.

6.1. Starting the Logger	104
6.1.1 Starting the Logger on Linux	104
6.1.2 Starting the Logger in Windows	104
6.1.3 Running the Logger without a GUI	104
6.2. The Logger Window	104
6.2.1 The Timeline	106
6.2.2 Hiding Plug-in Views	106
6.2.3 Docking and Undocking GUI Plug-in Views and Toolbars	107
6.2.4 Saving the Window Layout	107
6.3. Connecting to the Simulation Network	108
6.3.1 Disconnecting from the Simulation Network	108
6.4. Opening Logger Files	108
6.4.1 Upgrading a Logger File's Format	110
6.4.2 Opening Incomplete Files	110
6.4.3 Closing a Logger File	110
6.5. Listening to the Network	111
6.6. Viewing and Editing Logger File Information	111
6.6.1 Displaying Information about a Logger File	111
6.6.2 Editing the Logger File Description	112

6.1. Starting the Logger

The Logger has separate executables for each protocol supported: *loggerDIS*, *loggerHLA13*, *loggerHLA1516*, and *loggerHLA1516e* (see "2.2. The Logger Directory Structure" on page 38 for a description of the directories). The protocol displays in the title bar of the GUI.

In sample command lines, we use the generic form *loggerversion*. You can use command-line options to override default configuration parameters and otherwise specify the Logger's initial settings. "5.11. Summary of Command-line Options for the Logger" on page 99 lists command-line options for the Logger.

6.1.1 Starting the Logger on Linux

► To start the Logger:

1. Open a Linux shell.
2. Change to the *./bin64* directory.
3. Enter:

```
loggerversion [filename options]
```

where *version* is DIS, HLA13, HLA1516, or HLA1516e.

6.1.2 Starting the Logger in Windows

Start the Logger in any of the following ways:

- On the Windows 10 Start Menu, choose **MAK Technologies > Logger protocol**, where *protocol* is DIS, HLA 1.3, or HLA 1516 Evolved.
- In a command window, change to the *./bin64* directory and then enter:

```
loggerversion [filename options]
```

- Create a shortcut on the Windows desktop and specify the appropriate command line in the Properties dialog box.
- In the File Explorer, double-click a Logger file.

6.1.3 Running the Logger without a GUI


You can run the Logger in console mode with or without the GUI. For details about running in console mode, see "14.3. Using Logger Commands in the Text Interface" on page 195. To disable the GUI, in the configuration file, comment out the line that installs the *protocolGuiLibrary* plug-in:

```
<!-- <command domain="System" protocol="None" command="LoadPlugin">  
  <param name="pluginName" var="protocolGuiLibrary"/>  
</command> -->
```

6.2. The Logger Window

The Logger window has a set of control buttons, a timeline, and a status bar (Figure 18). Data supplied by plug-ins, such as packet counts and annotations, displays between the toolbar controls and the timeline. You can enable and disable the display of plug-in data.

Figure 18. Logger window with a Logger file loaded

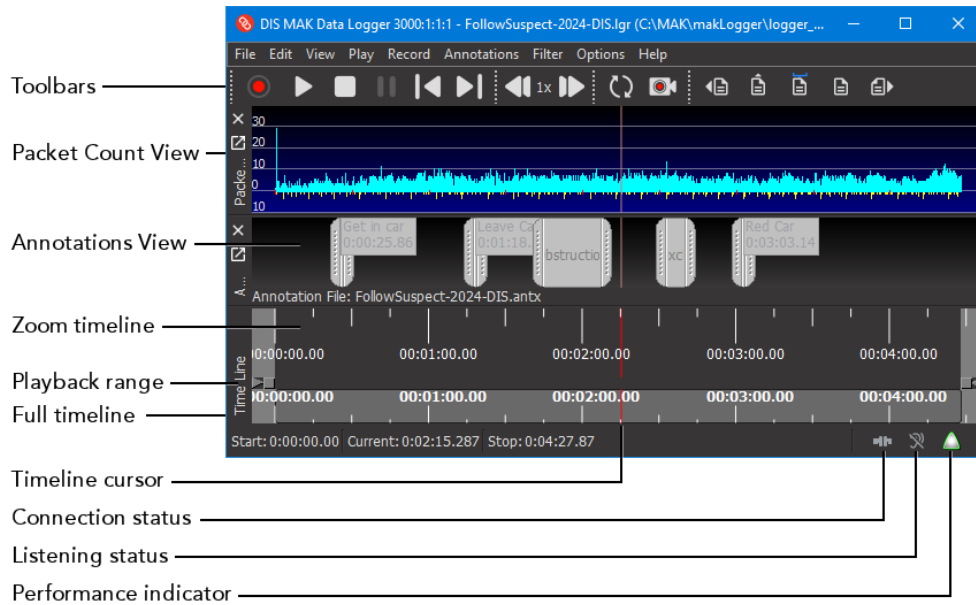

When you close the Logger, it remembers the size of the window and which views were displayed, and restores that configuration the next time you run it.


The Logger window toolbars have these buttons:

- Record.
- Play.
- Stop.
- Pause.
- Jump to Start. Move the timepoint (playback cursor) to the start of the playback range.
- Jump to End. Move the timepoint to the end of the playback range.
- Decrease the playback speed (by 50%).
- Current speed (for example, 1x).
- Increase the playback speed (double the speed).
- Set the end of playback action (stop or wrap).
- Enable video recording.
- Jump to the previous annotation.
- Insert a point annotation.
- Insert a range annotation.
- Extend the selected annotation.
- Jump to the next annotation.

6.2.1 The Timeline

The timeline is actually two timelines (Figure 19). During playback, the upper timeline, or zoom timeline, lets you zoom in and out on the recording for a finely grained analysis of what happens at various time points. The bottom half of the timeline, the full timeline, always displays a timeline for the entire length of the recording. The yellow area shows the portion of the recording that is visible in the zoom timeline.

Figure 19. Timeline

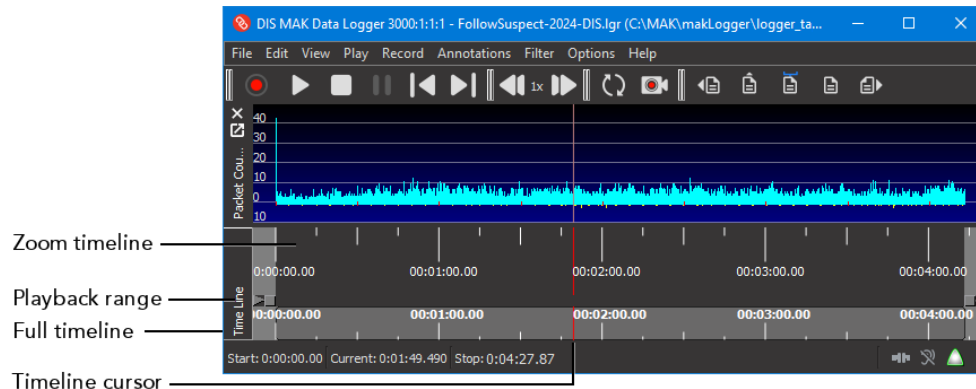

During recording, the zoom timeline always shows the most recent 30 seconds of the recording. (You can change the amount of time shown with the `SetFollowingInterval` command.) The full timeline shows the entire length of the recording.

The full timeline always shows the location of the timeline cursor. The zoom timeline shows the cursor if it is within the current zoom range.


For more information about the timeline, see "8.1.6 Playing a Segment of a File" on page 125, "8.2. Zooming the Timeline" on page 128, and "8.3. Moving the Timepoint to a Specific Time" on page 130.

6.2.2 Hiding Plug-in Views

► To hide a plug-in view, you can either:

- Select the appropriate option on the View menu.
- Click the hide button for the plug-in view that you want to hide (Figure 20).

Figure 20. Plug-in window controls




6.2.3 Docking and Undocking GUI Plug-in Views and Toolbars

You can undock and dock plug-in views and toolbars from the Logger window and place them anywhere on the desktop. You can dock the toolbars to the window at the top and sides and can reorganize the order in which they are placed.

i Floating windows are supported only in the Windows version of the Logger.

Figure 21. Undocked GUI components

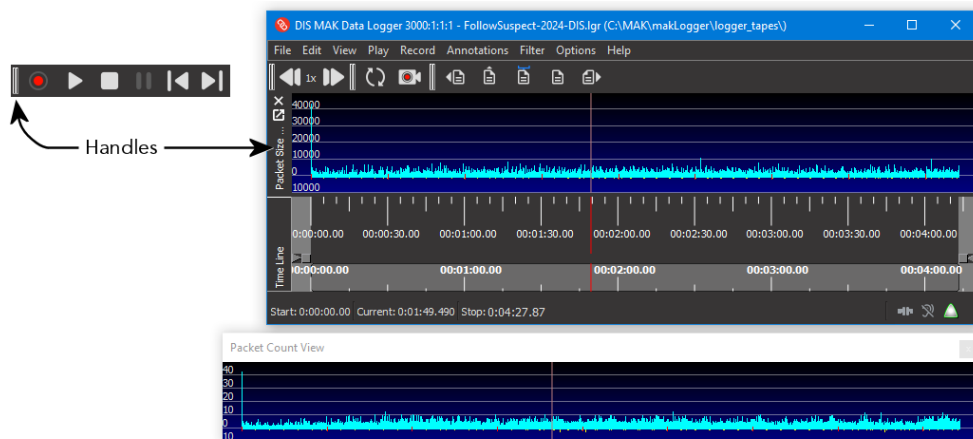

- To undock a plug-in view or toolbar, click and hold its handle and drag it off the window. You can also undock a data view by clicking the undock button (Figure 20).
- To dock a toolbar, drag it to the Logger window where you want to dock it. You can dock toolbars to the top and sides of the window.
- To dock a plug-in view, drag it to the window or double-click its title bar. You can dock plug-in views in the space above the timeline.

i If the Logger window is resized such that there is not enough room above the timeline for a plug-in view, you might not be able to dock a previously undocked view. If this happens, double-click the title bar of the undocked view.

6.2.4 Saving the Window Layout

When you close the Logger, it automatically saves the window size and location to *logger-gui.conf* in your AppData directory on Windows and home directory on Linux (for example, *C:\Users\user_name\AppData\Roaming\MAK\Logger\5.11\logger-gui.conf* (Windows) or *~/mak/Logger/5.11/logger-gui.conf* (Linux)). The name of the configuration file is specified in the configuration file for the version of the Logger you are running, for example, *./bin64/lgrConfigDIS.xml*.

You can change the name of the GUI configuration file by editing this line in the Logger configuration file:

```
<var name="defaultGuiConfigFilename" type="string"
value="logger-gui.conf"/>
```

You can also specify the GUI configuration file from the command line with the `SetGuiConfigFilename` command.

If you want to run multiple Loggers at the same time and automatically place them in different locations, you can specify different locations for the GUI configuration file either by using different Logger configuration files or the command line.

For details about the Logger configuration file, see "6.6. Viewing and Editing Logger File Information" on page 111. For details about using Logger commands, see "Chapter 14. Using Logger Commands" on page 193

6.3. Connecting to the Simulation Network

When you start the Logger, it automatically connects to the simulation network using the stored connection parameters. If you disconnect from the network, you can connect again as described in this section and as described in "4.1.2 Editing a Connection" on page 57.

- To connect to the network, choose **File > Connect**, or double-click the connection status icon on the status bar (.

6.3.1 Disconnecting from the Simulation Network

When you disconnect from an exercise, you can no longer send data to it or record data from it.

 You cannot disconnect from an exercise while you are recording or playing a file.

- To disconnect from an exercise from the GUI, choose **File > Disconnect**, or double-click the connection status icon on the status bar (.

6.4. Opening Logger Files

If you want to play a file or edit it, you must open the file. When you open a file, its filename displays in the Title Bar. If the Packet Count and Packet Size views are enabled, histograms are calculated and displayed. (For details about the packet views, see "8.4. Viewing Packet Histograms" on page 131.)

By default, if a recording has a video file associated with it, and if the video file has the same name as the recording (except for the extension, of course), the Logger plays the video file in the Logger window when you play the recording. When you open a Logger recording that has an associated video file, you can also specify the name of the file and specify that it be streamed to the network.


► To open a Logger file:

1. Choose **File > Open**. The Open File dialog box opens.
2. Select the file. You must select a file that was created with the same protocol as the version of the Logger you are running (DIS, HLA 13, HLA 1516, or HLA Evolved). If you select a file that is for the wrong protocol, the Open button is not activated. Information about the file displays in the Information panel (Figure 22). It includes the protocol used to record the file. (If the Information panel is not displayed, click

the Show More Logger Information icon ().

If there is a video file that has the same name as the Logger file, it is listed in the file box in the Video Playback section of the Open File dialog box.

Figure 22. Open File dialog box

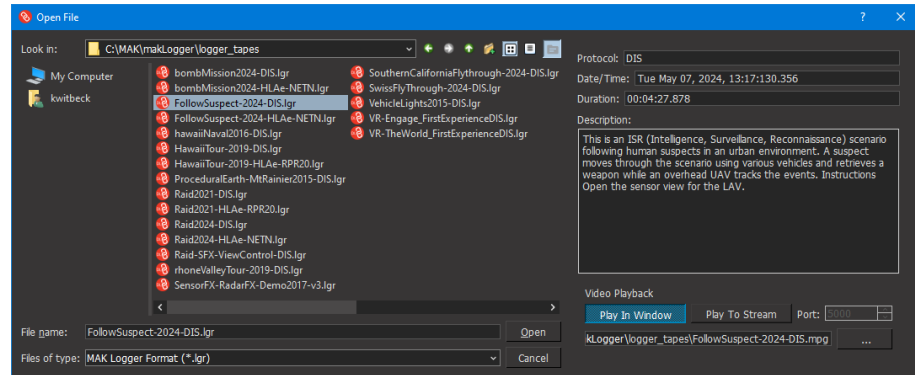

3. Configure video playback options:

- If video playback is enabled, but you do not want to play the video in the Logger window, click the Play In Window button to disable playback.
- If video playback is disabled and you want to play a video recording in the Logger, click the Play In Window button to enable playback.
- If there is a video file associated with this Logger recording and it does not have the same name as the Logger file, specify it in the file box in the Video Playback section of the dialog box.
- If you want to stream the video to the network, click the Play To Stream button.
- Optionally, if Play To Stream is enabled, change the port. (You can specify the default port and IP address on the Logger Preferences dialog box, Video Settings page.)

 The Play In Window and Play To Stream options are independent of each other.

4. Click Open. If there is an annotations file with the same name as the Logger file, it opens automatically. If Play On Load is enabled, the Logger starts playing the file immediately. If there is a video file for this recording and the Video Stream view is not open, it opens automatically.



- You can also load a file by double-clicking its icon in a folder or by dragging it onto the Logger window.
- If you load a file that was created using a Logger format prior to Logger 5.4, you are prompted to upgrade to the current format. If you decline to do so, some Logger features may not be supported. You can upgrade manually at a later point. For details, see "6.4.1 Upgrading a Logger File's Format" below.

6.4.1 Upgrading a Logger File's Format

When you load a Logger file that was created with a previous format, the Logger prompts you to upgrade. If you click OK, it upgrades to the latest file format and opens the file. You can also upgrade manually.

► **To upgrade a file to the latest format:**

1. Open the file.
2. Choose **Edit > Upgrade File Format**.

6.4.2 Opening Incomplete Files

When the Logger finishes recording a file, it writes a table of all entities and a checkpoint index table to the end of the file. It uses this data to load and play back the file. If recording terminates abnormally—for example, due to a crash or running out of disk space—this data is not written. The Logger can repair and open such files.

When the Logger loads a file that is missing the end-of-file data, it prompts you to repair the file. Your options for repairing files are:

- Repair the file. If you choose this option, the Logger uses the data in the incomplete file and the current checkpointing policy to create a new, complete file, which it then loads. It saves the repaired file to the same location as the incomplete file. The new file is named *original_filenameRepaired.lgr* (for example, *../logger_tapes/demo.lgr* would become *../logger_tapes/demoRepaired.lgr*). The original file is unchanged.
- Do not repair the file. If you choose this option, then the partial file loads. It has the original checkpoints if they are in the file; however, the checkpoints may be unreliable. Also, when you load an incomplete file, it does not load the entity tracking information. The entity tracking table provides the entity information for filtering by entity name (entity ID in DIS). Therefore, filter by entity name will have an empty list.

The partial file cannot be saved or saved to another filename. However, it can be exported, which will create a repaired file. Also, editing the file will repair it and allow it to be saved using the original name. The entity tracking information will be restored to the loaded, edited copy.

6.4.3 Closing a Logger File

► To close a Logger file, choose **File > Close**.

6.5. Listening to the Network

The Logger listens to the network when it is recording. It can also listen to the network when it is idle; that is, it is not recording or playing a file. This feature allows it to discover objects before it starts recording, which improves performance when recording starts. If you are using HLA, the HLA Traffic Analyzer can view data.

When you enable idle listening before starting to record, an "initial state" packet is inserted at the beginning of the recording. It contains the current known state of any entities. When the recording is played back, the initial state produces appropriately dead-reckoned states to represent the entities from the start time of the recording.

The ability to listen to the network is enabled by default. The listening status is shown by the ear icon on the Status bar (Figure 18 on page 105). You can disable this feature with the `SetListenWhenIdle` command.

```
<var name="listenWhenIdle" type="bool" value="true"/>

<command domain="Simulation" protocol="None"
  command="SetListenWhenIdle">
  <param name="listenWhenIdle" var="listenWhenIdle"></param>
</command>
```

6.6. Viewing and Editing Logger File Information

The Logger automatically records the following information about a Logger file:

- Protocol.
- Date and time of recording.
- Length of recording time.
- FOM file (HLA only).
- FOM modules (HLA Evolved only).

The Open File dialog box displays this information for any file you select, even if you cannot open the file using the version of the Logger that you are running. This is useful if your naming convention does not include the protocol used to record the file.


You can add a description of the recording to the file information.

 Logger files created with Logger 3.x or earlier do not display basic information. Logger files must use the Logger 5.3 or later format to store descriptive text. If you open an older file and do not upgrade, you cannot add descriptive text to the Logger information.

6.6.1 Displaying Information about a Logger File

You can display file information for the loaded Logger file at any time.

- To display file information, choose **File > Logger File Information**. The Logger File Information dialog box opens (Figure 23).

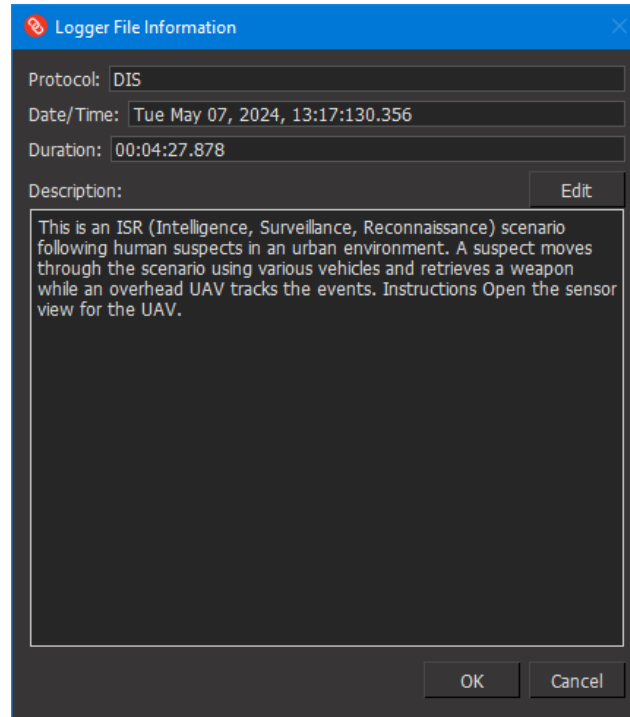Figure 23. Logger File Information dialog box

6.6.2 Editing the Logger File Description

You can add text to a Logger file description to describe the contents or purpose of a recording, or any other useful information. The description uses HTML for formatting. If you enter text without HTML tags, it displays as an unformatted paragraph.

You can add a description while a file is open, when you first create it, or when you save it.

The basic file information (protocol, date/time, and so on) is read-only.

► **To edit the Logger file description while the file is open:**


1. **File > Logger File Information.** The Logger Information dialog box opens (Figure 23).
2. Click Edit. The text area changes to edit mode.
3. Type the file description in the edit window. Use HTML tags to add formatting.
4. To preview the description, click Preview.
5. Click OK.
6. Save the Logger file.

 The Logger preserves your changes to the description while the file is open. However, if you do not save the Logger file, your changes to the description are lost when you close it.

► **To add a file description when you start to record a file:**

1. Choose **Record > Record As**. The New Logger File dialog box opens (Figure 24).

Figure 24. New Logger File dialog box

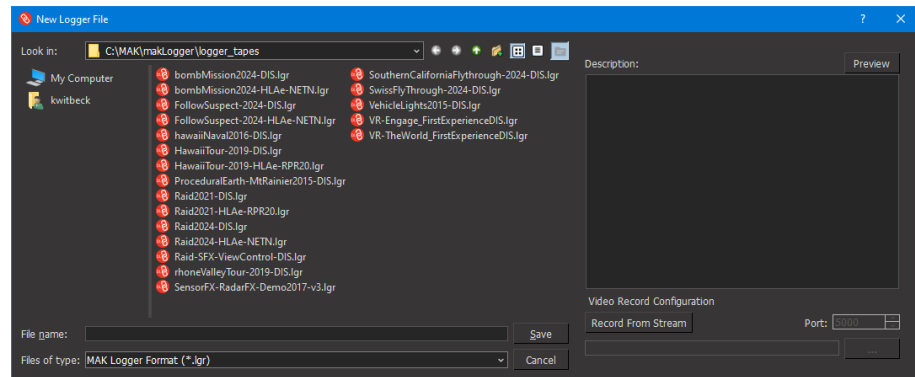


2. In the Description window, type the description. If you want it to be formatted, use HTML tags.
3. Optionally, click Preview to preview the formatted text.
4. Type a file name.
5. Click Save.

► **To add a file description when you save a file:**

1. Choose **File > Save As**. The Save File As dialog box opens (Figure 25).

Figure 25. Save File As dialog box

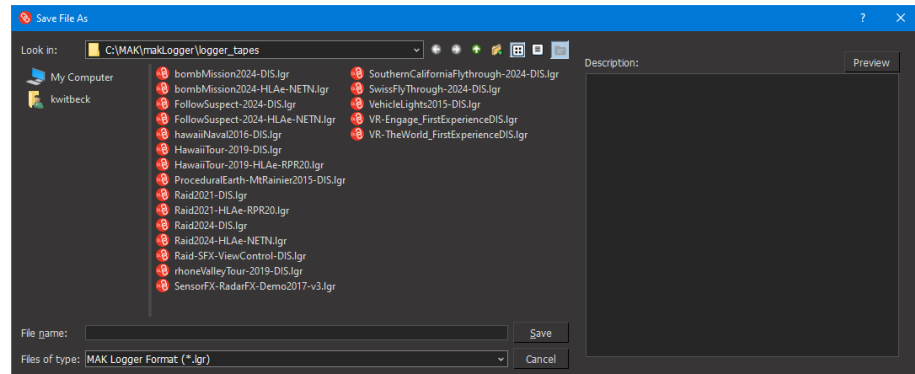

2. In the Description window, type the description. If you want it to be formatted, use HTML tags.
3. Optionally, click Preview to preview the formatted text.
4. Type a file name.
5. Click Save.



7. Recording Logger Files

This chapter explains how to use the Logger's core features from the GUI.

7.1. Recording Exercises	116
7.1.1 Recording Immediately (to a Temporary File)	116
7.1.2 Recording to a Specified File	116
7.1.3 Recording to Multiple Files	117
7.1.4 Pausing the Recording Process	119
7.1.5 Stopping the Recording Process	119
7.2. Enabling Video Recording	119
7.2.1 Recording Streaming Video from VR-Vantage	120
7.2.2 Recording Streaming Video from a Webcam	120
7.3. Saving Files	121
7.3.1 File Backups	121
7.3.2 Saving a File to a New Name	122
7.3.3 Saving a Portion of a File to a New File	122

7.1. Recording Exercises

When you record an exercise, you can specify a name for the new recording and then start the recording process, or you can start recording immediately and save the recording to a file when you are done (the default behavior).

The Status Bar displays the starting time, the current time, and the total time of the recording.

As recording progresses, the Time field updates to display elapsed time. By default, the zoom timeline shows the most recent 30 seconds of the recording. (You can change this with the `SetFollowingInterval` command.) The full timeline shows the entire length of the recording. In record mode, the timescale is fixed at 1.0 (normal speed).

- If you are recording an exercise that is running faster than real-time, the Logger records the simulation at that rate and will play it back faster than real-time when the playback timescale is set to 1.0.
- You cannot record and play back a file at the same time using a single Logger.

7.1.1 Recording Immediately (to a Temporary File)

- To begin recording, choose **Record > Record** or click the Record button (●).

7.1.2 Recording to a Specified File

Unless you enable Pause on Record As, the Logger starts recording as soon as you specify a filename.

- **To record an exercise to a named file:**

1. Choose **Record > Record As**. The New Logger File dialog box opens.
2. Type a new filename or select an existing file.

⚠ If you select an existing file, its contents are overwritten by the new file.

3. If you want to record a video stream and video streaming is not enabled, click the Record From Stream button.
4. If video recording is enabled, optionally specify an alternative port, file name, or both.

ℹ The video stream must be a single video. The Logger does not support video multiplexing.

5. Click Save. If Pause on Record As is disabled (the default), the Logger starts recording immediately.
- If Pause on Record As is enabled, to begin recording, choose **Record > Record** or click the Record button (●).

Enabling Pause on Record As

By default, when you choose Record As, the Logger starts recording as soon as you close the New Logger File dialog box. If you do not want to start recording immediately, you must enable Pause on Record As. When Pause on Record As is enabled, the Logger does not start recording until you click the Record button.

- To enable or disable immediate recording for the Record As command, choose **Options > Pause on Record As**.


7.1.3 Recording to Multiple Files

The Logger can record an exercise to multiple files as it is recording the primary Logger file. When you record to multiple files, the Logger saves data to file at the specified time intervals. You can play or otherwise process these files in a second Logger while the first Logger continues to record the exercise. This option also ensures that if logging of the exercise is interrupted due to system or application instability, you will not lose the data saved prior to the application problems.

► **To record to multiple files:**

1. Choose **Record > Record to Multiple Files**. The Record to Multiple Files dialog box opens.
2. Optionally, change the location to which the complete file will be saved in the Complete File Directory text box.
3. In the Complete File Name box, specify the name of the complete file.

Figure 26. Record to Multiple Files dialog box

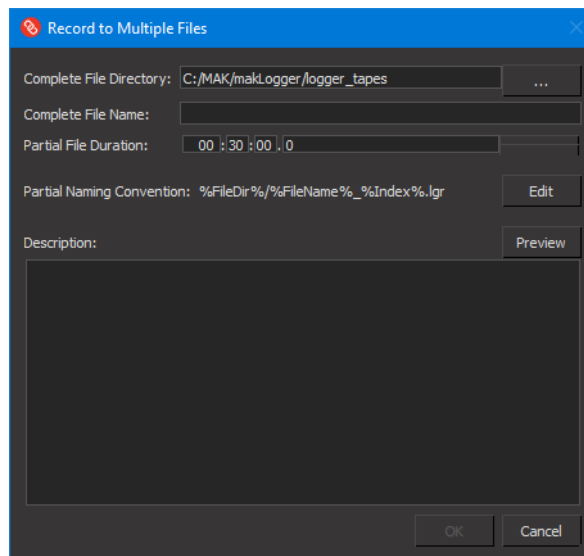

4. Specify the length of each partial file in the Partial File Duration box.
5. Optionally, change the convention used to name the new files. For details about changing the partial file naming convention, see "Specifying the Partial File Naming Convention" on the next page.
6. Click OK.


Specifying the Partial File Naming Convention

The default convention for naming partial files is *completeDirectoryPath_filename_n.lgr*. Files are written to the complete directory path. However, you can change the naming convention using a set of macros provided with the Logger.

► **To change the partial file naming convention:**

1. Choose **Record > Record to Multiple Files**. The Record to Multiple Files dialog box opens.
2. Click Edit. The dialog box expands to display a list of macros (Figure 27).

Figure 27. Record to Multiple Files dialog box in Edit mode

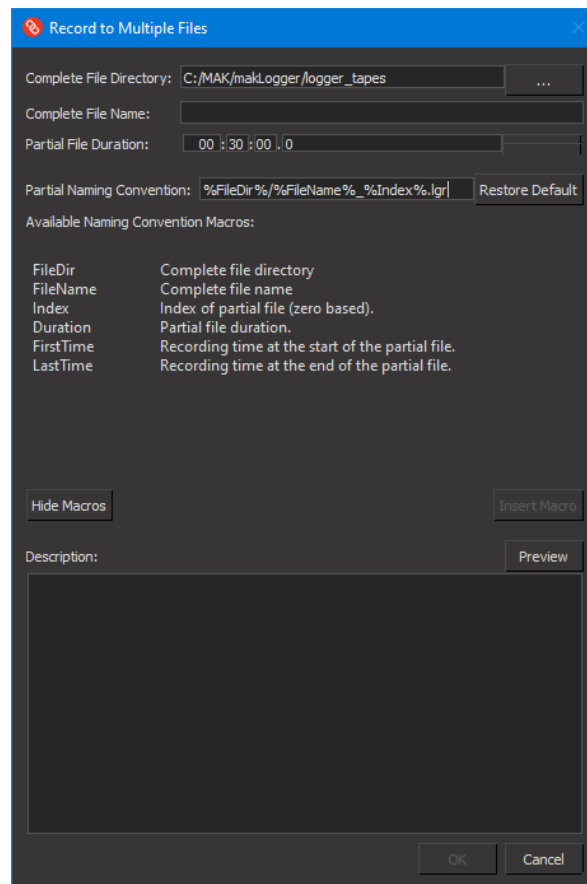

3. Edit the text in the Partial Naming Convention box manually as desired or add macros, or both.
4. To add a macro to the naming convention, select it in the list and click Insert Macro (or double-click the list entry). It is added at the location of the insertion point in the Partial Naming Convention box. To ensure that each partial file has a unique name, the naming convention must include at least one of Index, FirstTime, or LastTime. For explanations of the macros, see Table 37.
5. Click Hide Macros to close the macro list.
6. Click Restore Default to revert to the default naming convention.

Table 37. Partial file naming convention macros

Macro	Definition
FileDir	The path of the directory in which the complete file will be saved. The macro does not include the final path separator.
FileName	The name of the complete file, without the file extension.
Index	An integer index, starting at 0 and increasing by one for each partial file created.
Duration	The duration of the file in seconds. Each partial file, except the final file will be this long.
FirstTime	The time in the complete file that maps to the beginning of the new file, in seconds.
LastTime	The time in the complete file that maps to the end of the new file, in seconds.

7.1.4 Pausing the Recording Process

You can pause the recording process and then resume recording to the same file.

 When you pause during the recording process, the file is not saved. You cannot play back the file from the paused recording state. If for some reason you exit the Logger while in the paused state, the file will not be saved.

- To pause the recording process, click the Pause button (.
- To resume a paused recording, choose **Record > Record**, or click the Record button (.

7.1.5 Stopping the Recording Process

When you stop recording, the Logger enters playback state and you cannot resume recording. If you want to resume a recording, pause it.

 If the Logger has not recorded any data, it cannot create a file.

- To stop recording, choose **Record > Stop**, or click the Stop button (.

7.2. Enabling Video Recording

By default, video recording is disabled. (You can change the default in the Preferences dialog box.) You can enable it in several ways.

- To enable video recording, use any of the following methods:

- Choose **Record > Video Recording**.
- Click the Enable Recording button ( on the toolbar.

- Select the Record Videos check box on the Logger Preferences dialog box, Video Settings page.
- Click the Record from Stream button on the New Logger File dialog box.

- i**
- When you are recording video, the video stream does not display in the Video Stream View. However, an icon is added to the status bar () that indicates you are recording video.
 - The Logger does not record audio, except for audio that is sent using DIS/HLA PDUs, such as a signal PDU. The PDUs are recorded as part of the regular DIS/HLA data stream.

7.2.1 Recording Streaming Video from VR-Vantage

VR-Vantage, MAK's image generation application, can stream video from an observer window. (For details, see the *VR-Vantage Users Guide*.)

To record the VR-Vantage video stream in the Logger, choose one of the streaming video options in VR-Vantage:

- MPEG2-MPGTS-UDP
- MPEG2 Metadata-MPGTS-UDP
- H264 HW-MPGTS-UDP
- H264 HW Metadata-MPGTS-UDP

By default, VR-Vantage and the Logger both default to port 5000, which allows you to easily record a VR-Vantage video stream without changing the port in either product. As long as the Logger is configured to record the same port, it records video directly from VR-Vantage, synchronized to the simulation data that is being sent.

- i** The Logger also supports using H264 for the video stream. To stream video from VR-Vantage using H264, the VR-Vantage window height and width must be multiples of 16 (for example, 1280 x 1024, 1024 x 768). Otherwise, the video stream will be unusable. For information about setting the VR-Vantage window size, please see the *VR-Vantage Users Guide*.

7.2.2 Recording Streaming Video from a Webcam


The Logger includes a separate executable (`./bin64/webcamStreamLauncher.exe`) that can automatically activate the first webcam it finds on your computer and stream its video through the network. By default, the software is configured to use your loopback connection and port 5000, which is also the default port for the Logger.

The webcam executable also allows you to create your own GStreamer pipeline.

► **To stream webcam video:**

1. On the Start menu, choose **MAK Technologies > Webcam Stream Launcher 5.11.1**, or run `./bin64/webcamStreamLauncher.exe`. Webcam Stream Launcher opens (Figure 28).

Figure 28. Webcam Stream Launcher

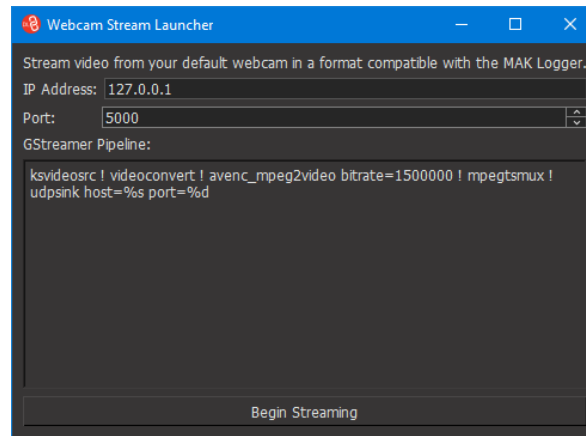

2. Optionally, edit the IP Address or Port.
3. Optionally, edit the GStreamer Pipeline.
4. Click Begin Streaming. As long as the Logger is configured to record from the same port, it records video directly from your webcam, synchronized to that simulation data that is being sent.

7.3. Saving Files

When you record a simulation or edit a Logger file, the file is in an unsaved state, which is indicated by an asterisk next to the filename in the Title bar. If you specify a name for a file before you start the recording process, it is automatically saved when you stop recording. If you have an unsaved file loaded, the Logger prompts you to save it before exiting, opening a file, closing a file, or recording a new file.

If video recording is enabled, when you save an unsaved file, the Logger creates a video file with the same name and the extension `.mp4`.

- To save a file, choose **File > Save**. If the file already has a filename, it is saved immediately. If it does not yet have a filename, you are prompted to supply one (Save As).

7.3.1 File Backups

When you save a previously saved file, the Logger creates a backup file by renaming the previous version of the file to `filename.bak.lgr`. For example, if you edit `brooklyndemoDIS.lgr` and save the changes, the original version of `brooklyndemoDIS.lgr` is saved to `brooklyndemoDIS.bak.lgr`.

The Logger maintains only one backup for a particular Logger file. If you edit and save a file that was previously backed up, the original backup file is replaced with a newer backup file. For example, if after saving *brooklyndemoDIS.lgr* in the previous example, you were to edit it again and save it, a new version of *brooklyndemoDIS.bak.lgr* would replace the original backup file.

You can disable automatic backup with the `SetBackupOnSave` command.

7.3.2 Saving a File to a New Name

- To save a file to a new name, choose **File > Save As** and then enter a new name in the Save As dialog box.

7.3.3 Saving a Portion of a File to a New File

You can save a segment of a file to a new file. The timestamps of the packets in the new file are offset so the first packet is at time zero. If the segment has annotations, they are saved with the segment.

- **To save a segment of a file to a new file:**

1. Open the file.
2. Use the timeline sliders to select the segment you want to save. (The selected segment is the white area of the timeline, not the gray area.)
3. Choose **File > Export Selection To > Logger File**. A standard Save file dialog box opens.
4. Enter a name for the new file.
5. Click OK.



8. Playing Logger Files

This chapter explains how to use the Logger's core features from the GUI.

8.1. Playing Logger Files	124
8.1.1 Playing a Logger File	124
8.1.2 Pausing Playback of a Logger File	124
8.1.3 Looping Playback	124
8.1.4 Stopping Playback of a Logger File	124
8.1.5 Viewing Video	125
8.1.6 Playing a Segment of a File	125
8.1.7 Setting the Playback Speed	126
8.1.8 Using High-Speed Playback	127
8.1.9 Playing a File While Recording It	128
8.2. Zooming the Timeline	128
8.2.1 Zooming the Timeline with the Mouse	129
8.2.2 Setting the Zoom from the Set Zoom Dialog Box	129
8.2.3 Moving the Zoomed Selection	130
8.3. Moving the Timepoint to a Specific Time	130
8.3.1 Jumping to the Beginning or End of the Playback Range	130
8.3.2 Moving to a Specific Time in a File	130
8.3.3 Setting the Time Using the Timeline Cursor	131
8.4. Viewing Packet Histograms	131
8.4.1 Scaling the Packet Count View	132
8.5. Viewing Object Statistics	132
8.6. Viewing Streaming Video Using VLC	133
8.6.1 Reducing Latency in VLC	133
8.7. Playing HLA 1.3 Logger Files in HLA 1516 Federations	135

8.1. Playing Logger Files

The Status Bar in the Logger window displays the starting time for playback, the current time in the file, and the ending time for playback.



- Playback options are restricted in time-managed mode. For details, see "Some Logger Features Are Restricted When You Use Time Management" on page 51.
- For information about how to configure the Logger for faster playback, see "5.3. Configuring Faster Playback" on page 80.

8.1.1 Playing a Logger File

By default, the Logger enters a stopped state when you open a file.

► **To play a Logger file:**

1. Open the file.
2. Choose **Play > Play/Pause**, or click the Play button ().

Enabling Immediate Playback

When Play On Load is enabled, the Logger starts playing as soon as you open a file. If the file has an annotation file, it loads automatically. When Play On Load is disabled, you must click the Play button to start playing.

► To enable or disable immediate playback, choose **Options > Play On Load**.

8.1.2 Pausing Playback of a Logger File

When you pause playback, the Logger keeps the current velocity and acceleration values for each simulation object, but sets the Frozen bit so simulation objects do not move. By default, the dead-reckoning algorithm is set to static. For details about setting the dead-reckoning algorithm, see "5.4. Setting the Dead Reckoning Algorithm on Pause" on page 83.

► To pause playback of a Logger file, choose **Play > Play/Pause**, or click the Pause button (.

8.1.3 Looping Playback

When the Logger plays a file to the end or the end of a playback range, it can stop or it can loop back to the beginning of the file or range and start playing it again.

► To set the looping behavior, choose **Play > Toggle Loop at End**, or click the Toggle Loop At End icon ( in the Logger window (Figure 18 on page 105).

8.1.4 Stopping Playback of a Logger File

► To stop playback of a Logger file, choose **Play > Stop**, or click the Stop button (.

8.1.5 Viewing Video

When you open a recording that has a video file, you can enable or disable playback. (For details, see "6.4. Opening Logger Files" on page 108.) This section describes the mechanics of viewing the video.

If a recording has a video file, when you open it, the Video Stream View opens automatically. When you play the recording, the video starts playing as well. If you want to see a larger view of the video, you can resize the Logger window or undock the Video Stream View and resize it.

If you want to hide the video, you can close the Video Stream View.

If you enabled video streaming when you opened the file, you can view the video in another application, such as VLC. (For information about viewing a video stream in VLC, see "8.6. Viewing Streaming Video Using VLC" on page 133.) When you stream a video, an icon is added to the status bar to indicate that you are streaming video to the network.

8.1.6 Playing a Segment of a File


You can configure the Logger to play any arbitrary segment of a file. If you have the Logger configured to loop, it loops within the segment that you specified. You can specify exact start and stop times in a dialog box or you can specify the start and end times with the time sliders.

Specifying a Playback Segment Using the Time Sliders

► To play a segment of a file:

1. On the Logger timeline, drag the start time slider (Figure 29) to the time at which you want to start playback. The Start time displayed in the Status Bar is the exact time that you select.

Figure 29. Timeline sliders

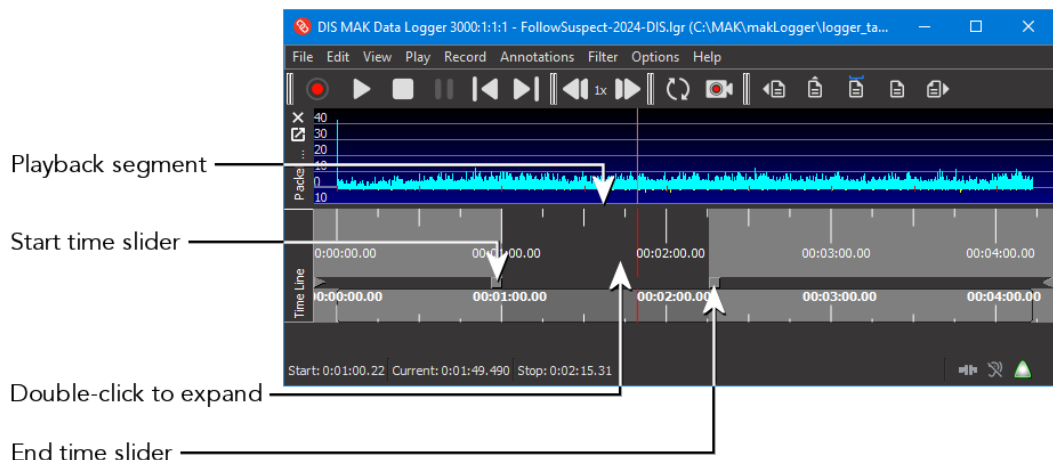


2. Drag the end time slider to the point on the timeline at which you want to end playback. The Stop time displayed in the Status Bar is the exact time that you select.
3. Play the file.

Specifying a Playback Segment in a Dialog Box

► To specify a playback segment using a dialog box:

1. Choose **Play > Set Start and End Times**. The Set Start and End Time dialog box opens (Figure 30).

Figure 30. Set Start and End Time dialog box

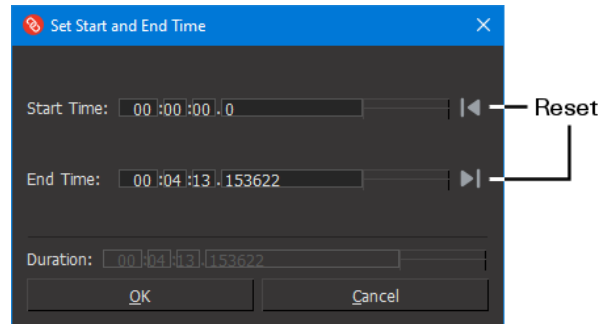

2. Enter start and end times or use the spinner control to set them. The duration of the segment displays in the Duration box.
3. To reset the start time to 0 or the end time to the end of the file, click the reset buttons to the right of the time value.
4. Click OK.

Expanding the Playback Segment to Full Length


- ### ► To expand the playback segment to the full length of the file, drag the sliders back to the edge of the window or double-click the slider bar between the start and end time sliders (Figure 29 on the previous page).

8.1.7 Setting the Playback Speed

You can vary the playback speed. The Speed toolbar allows you to increase speed by a factor of 2 and decrease by 0.5. The Set Playback Speed dialog box allows you to increase and decrease the speed by any value. If you set the speed using the Set Playback Speed dialog box, the Speed toolbar displays the new speed and increases or decreases the speed relative to the new value, not the default set of values. The actual speed of the action in the file depends on the speed at which you recorded it.

► To set the playback speed:

1. Choose **Play > Playback Speed > Set Playback Speed**, or click the current speed setting on the Speed toolbar. The Set Playback Speed dialog box opens (Figure 31).

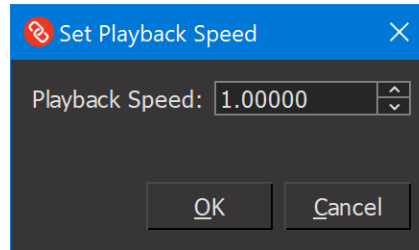Figure 31. Set Playback Speed dialog box

2. Enter a speed or set it using the spin controls.
3. Click OK.

You can quickly increase or decrease the playback speed by a factor of two.

- To quickly increase or decrease playback speed, choose **Play > Playback Speed > Increase Playback Speed 2x** (or **Decrease Playback Speed 1/2x**), or click the Increase Speed button (▶▶) or Decrease Speed button (◀◀) on the Speed toolbar.

8.1.8 Using High-Speed Playback

Use the high-speed playback feature to play files at higher speeds than would normally be possible. (The Logger has a practical limit on the rate at which it can send updates and interactions based on processor and network speed.) Use it when the combination of playback speed and file density (number of recorded packets per second) results in a required packet output rate that exceeds the rate at which the Logger can transmit the packets on the network. For example, high-speed playback is useful for simulations with many entities, simulations that are quite lengthy (for which you might want to speed up playback significantly), or both.

In high-speed playback, instead of playing every packet in the file, the Logger skips from checkpoint to checkpoint and sends the entity updates for the entities that exist at the time of each checkpoint. Interactions are sent if they were saved to the checkpoints. Where necessary, the Logger creates or removes the entities that were created or removed in between the jumps. The effect is very similar to that of a digital video player 20–60x playback, in which snapshots of scenes are shown, but not every frame.

When high-speed playback is enabled, the Logger sends updates only for checkpoints. It does not send any messages between checkpoints. The frequency of updates is determined by the frequency of checkpoints in the file and the playback speed. For example, suppose that you have a file that has checkpoints every 60 seconds. If you play the file at 60x speed, playback would advance to a new checkpoint every second.

i To use high-speed playback, a file must contain checkpoint data.

By default, high-speed playback is disabled. To enable it, edit the *lgrConfig.xml* file for your version of the Logger. In *lgrConfig.xml*, set the value for the `skippingPlaybackThreshold` variable to a value greater than 0, for example:

```
<var name="skippingPlaybackThreshold" type="double" value="16.0"/>
```

The value you enter is the playback speed at or above which the Logger skips from checkpoint to checkpoint rather than playing every packet. Therefore, do not set the threshold too low unless you have a very high entity count.

Once you configure high-speed playback, set the playback speed, as described in "8.1.7 Setting the Playback Speed" on page 126, and if the speed meets or exceeds the threshold, high-speed playback is used.

8.1.9 Playing a File While Recording It

You can play a file as it is being recorded. You need two instances of the Logger to do this: one records the exercise and the second plays the file that you are recording.

When you open a file that is being recorded, the file is incomplete. As a result, the Logger prompts you to repair it. If you repair the file, it is saved and opened as a complete file. (For more information about incomplete files and file repair, see "6.4.2 Opening Incomplete Files" on page 110.) If you do not repair the file, the Logger opens the file for playback. The file duration matches the file length at the time it was opened. When you start playing the file, the Logger continuously updates the end of the file to capture the additional data as it is being recorded so that it is available for playback.

Since the file you are playing back is incomplete, some data is not available, such as the index table for efficient jumping within the file.

► **To play a file as it is being recorded:**

1. Start two Loggers.
2. Begin recording the exercise using one of the Loggers.

 It is recommended that you record the file using **Record > Record As** to ensure that the file has a meaningful name and is in the *./logger_tapes* directory (or wherever you decide to save it). If you record without using Record As, the file is saved to a temporary file. In Windows, this is *C:\Users\<user>\AppData\Local\Temp\lgr*.tmp*.


3. In the second Logger, choose **File > Open**. The Open File dialog box opens.
4. Select the file that you are recording. If you did not name the file when you started to record it, you will find the file in a temp directory. You are prompted to repair the file.
5. To play the file continuously as it is recorded, click No.
To play only the portion of the file that has been recorded to the point at which you opened it, click Yes.
6. Play the file.

8.2. Zooming the Timeline

You can zoom in and out on the timeline (adjust the granularity). You can zoom using the mouse or you can specify zoom boundaries, center point, and duration in the Set Zoom dialog box.

Figure 32 shows the zoom timeline zoomed to the range from approximately 00:45 to 2:37. The full timeline shows that range in yellow. The timeline cursor is at the same time point in each timeline. The Packet Count View is zoomed to show only the packets during the same time range as the zoom timeline.

Figure 32. Zoomed timeline

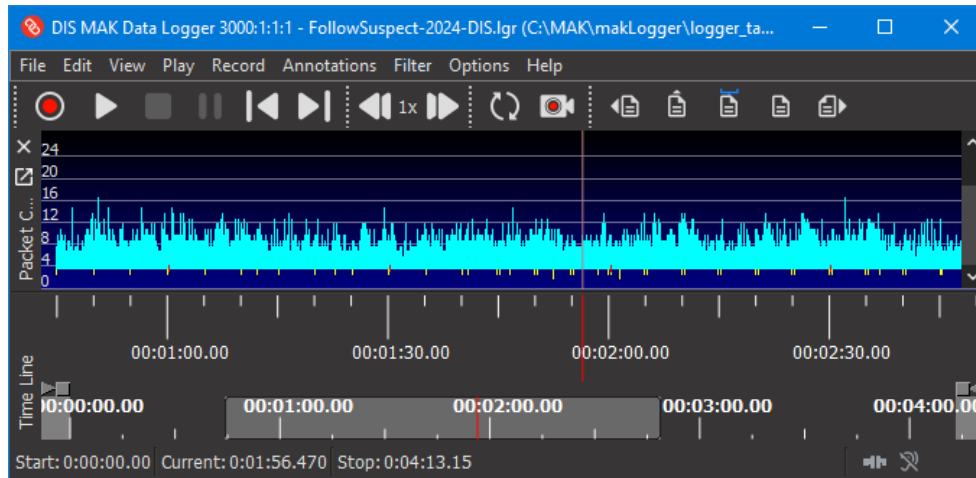

8.2.1 Zooming the Timeline with the Mouse

► To zoom the timeline with the mouse:

1. Move the mouse cursor over the timeline.
2. Move the mouse wheel forward to zoom in. Move it backwards to zoom out.


8.2.2 Setting the Zoom from the Set Zoom Dialog Box

The Set Zoom dialog box allows you to precisely specify the start and end point of the zoomed view.

► To zoom the timeline using the Set Zoom dialog box:

1. Choose **View > Set Zoom**. The Set Zoom dialog box opens (Figure 33).

Figure 33. Set Zoom dialog box

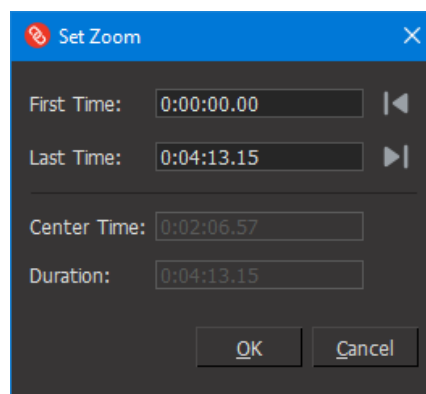

2. Enter the beginning time in the First Time box.
3. Enter the end time in the Last Time box.
4. If you want to reset the start time value to 0:00:00.0 or the end time to the end of the file, click the appropriate Reset button.
5. Click OK.

8.2.3 Moving the Zoomed Selection

If you have zoomed the timeline and want to look at a different portion of it at the same zoom level, you can easily move the time range.

- To change the time range for the zoomed selection, put the mouse cursor over the yellow segment of the full timeline and drag it to the time range you want to look at.

8.3. Moving the Timepoint to a Specific Time

The Logger provides several ways to move the timepoint to a specific time:

- Move to the beginning or end of the playback range.
- Specify a timepoint in a dialog box or using the mouse.
- Move to a time defined by an annotation.



- If you execute a time jump while playback is paused or stopped, the Logger remains in that state. The Logger also retains a play state after a time jump unless the end of the file is reached and wrapping is disabled.
- During slow-speed playback, when you use the Set Time option, the Logger sends interim messages to ensure that entities do not time out. For more information, see "Updating Entity Information Quickly After a Time Jump" on page 52.

8.3.1 Jumping to the Beginning or End of the Playback Range

- To jump to the beginning of a playback range, choose **Play > Jump To Start**, or click the Jump to Start button (.
- To jump to the end of a playback range, choose **Play > Jump To End**, or click the Jump to End button (.

8.3.2 Moving to a Specific Time in a File

Use the Set Time feature to move to a specific point in time measured from the start of the file. The speed of time jumps is affected by the checkpoint policy. For details about setting the checkpoint policy, see "5.2. Configuring Indexing" on page 78.

- **To move to a specific time:**

1. Choose **Play > Jump to Time**. The Jump to Time dialog box opens.
2. Enter the time you want to jump to.
3. Click OK.

8.3.3 Setting the Time Using the Timeline Cursor

The current timepoint during playback is indicated by a red bar (cursor) that moves along the timeline (Figure 18 on page 105).


► To set the playback timepoint using the timeline cursor, you can:

- Set a timepoint within the zoom range by clicking a location in the zoom timeline.
- Set a timepoint outside of the zoom range by clicking on the full timeline.

8.4. Viewing Packet Histograms

You can display a histogram of the number of packets being sent or recorded by the Logger (Packet Count View) and their size (Packet Size View). When you load a file with the Packet Count or Packet Size views enabled, the Logger calculates the histogram values for the entire file. Then it displays them (Figure 18 on page 105). When you record a simulation with these views enabled, the Logger updates them as data is recorded (Figure 34).

Figure 34. Packet histograms in record mode

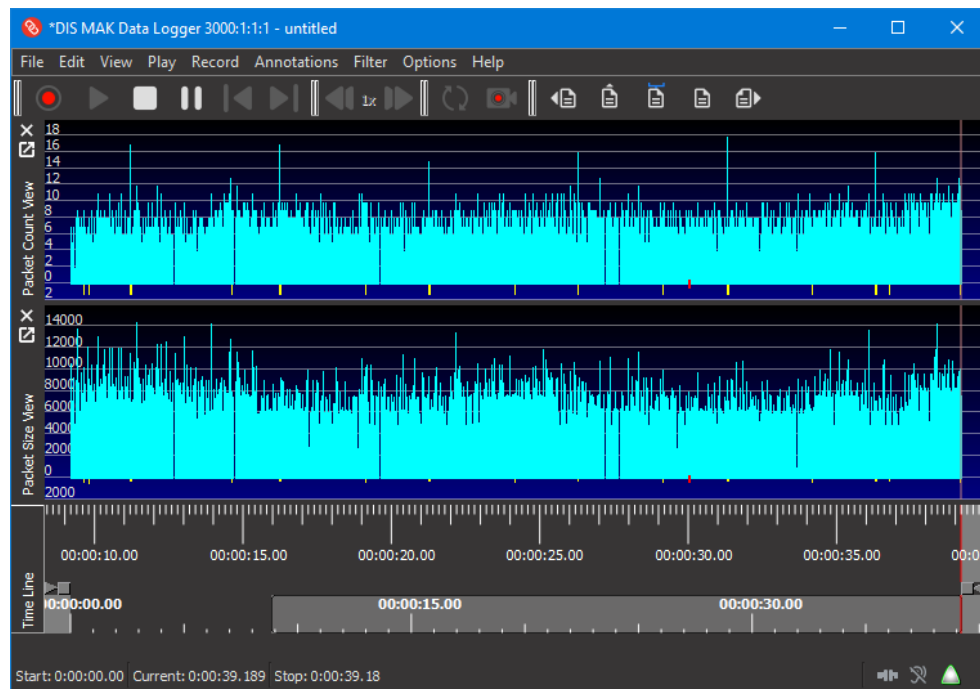

In the packet views, blue lines (above the centerline) represent the object packets; yellow lines (below the centerline) represent the interaction packets; red lines (small tick marks along the centerline) represent checkpoints.

Each line represents the count or size over a small interval of time. You can adjust the length of the interval with the `SetPacketViewInterval` command. For more information, see "Chapter 14. Using Logger Commands" on page 193.


- Because the Logger updates the packet views when it loads a file, loading large files with these views visible increases load time considerably.
- The packet views are completely updated each time you edit a file.

- To show or hide the Packet Count View histogram, choose **View > Packet Count View**.
- To show or hide the Packet Size View histogram, choose **View > Packet Size View**.

8.4.1 Scaling the Packet Count View

You can change the scale of the Packet Count View (Figure 35). When you zoom in, a scrollbar is added to the right end of the view. You can move the histogram up or down in the window to see the parts that have scaled out of the view.

Figure 35. Scaled Packet Count View

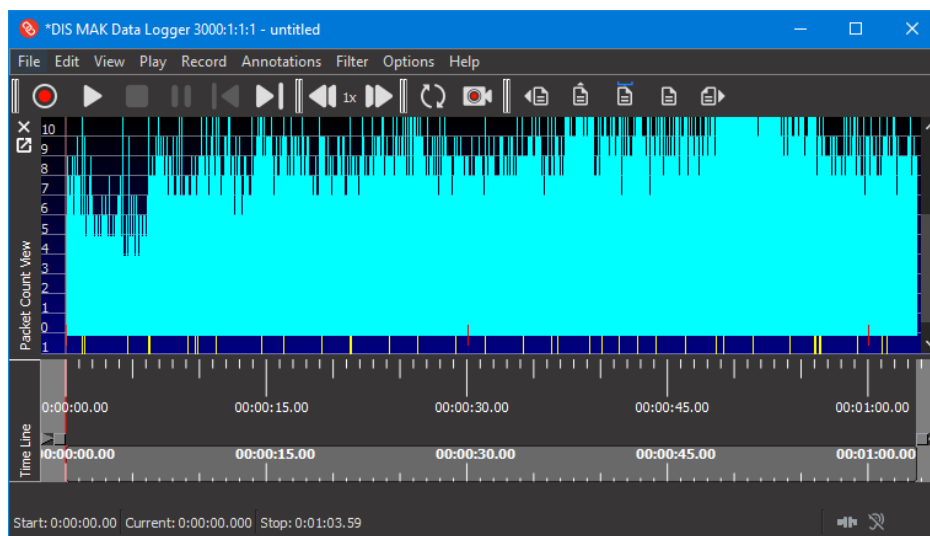


- **To change the scale of the Packet Count View:**
 1. Move the mouse over the Packet Count View.
 2. Move the mouse wheel to zoom in and out.
 3. Optionally, move the scroll box up or down to move the packet count up or down in the window.

8.5. Viewing Object Statistics

The Logger can display statistics about the objects being published (during playback) or reflected (during recording) by the Logger application (Figure 36).

Figure 36. Object statistics

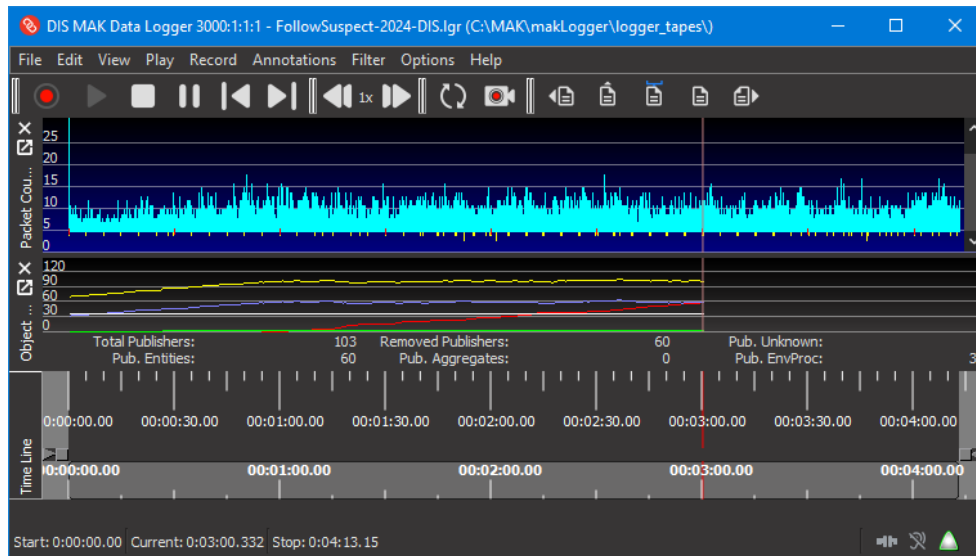

- To view or hide object statistics, choose **View > Object Statistics**.

8.6. Viewing Streaming Video Using VLC

You can stream a Logger video file to the network. You can view the video stream in VLC, a free third-party media player.

- **To view video streamed from the Logger in VLC:**

1. Start the video stream.
2. Start VLC.
3. Choose **Media > Open Network Stream**.
4. For the network URL, enter `udp://@:5000` (if the Logger's video playback port is 5000).

8.6.1 Reducing Latency in VLC

The default setting for viewing network streams in VLC includes a lot of buffering to make sure the video plays smoothly. This introduces significant latency on the receiving side. This section explains how to reduce that latency.


i Reducing latency may lead to jitter. However, when working on a LAN, MAK engineers have rarely had problems.

- **To reduce latency when using VLC:**


1. Start VLC.
2. Choose **Tools > Preferences**. The Preferences dialog box opens.
3. Select **Input / Codecs**.

4. In the Codecs group box, in the Hardware-accelerated Decoding list, select Automatic.
5. In the x264 Preset and Tuning Selection list, select ultrafast.
6. In the Network group box, in the Default Caching Policy list, select Lowest latency.
7. Click Save.

Figure 37. VLC Preferences, Inputs & Codecs

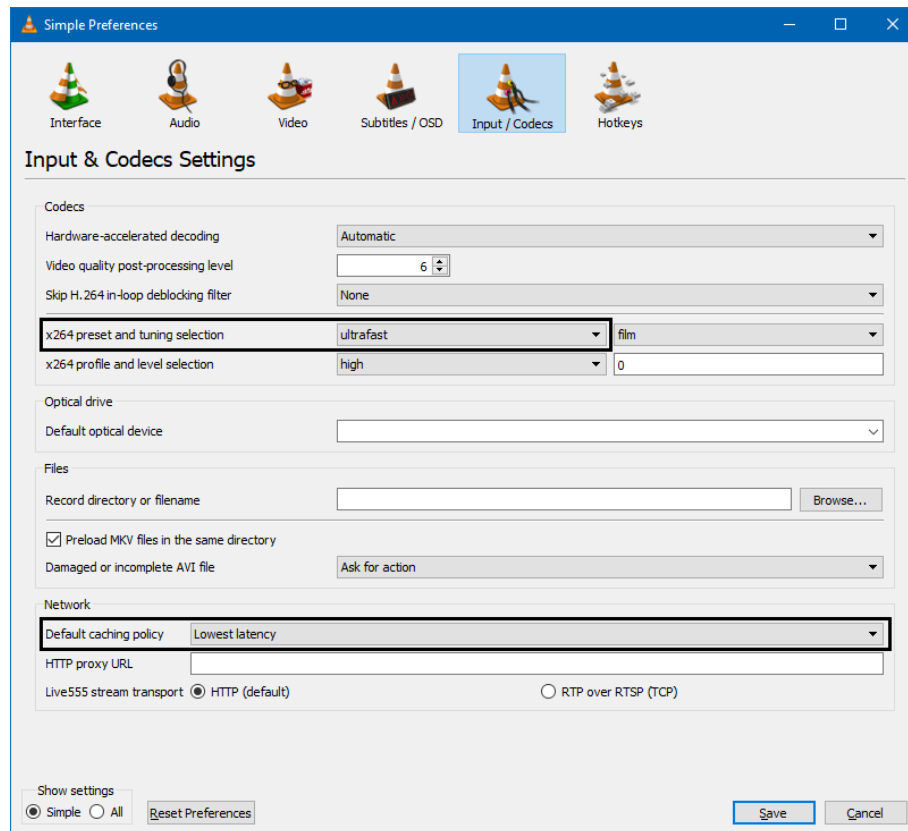

8. Choose **Media > Open Network Stream**. The Open Media dialog box opens.
9. Select the Network tab.
10. Enter the URL `udp://@:5000` (or the port your system is set to use).
11. Select the Show More Options check box. The dialog box expands with more options.
12. Set Caching to 1ms. (Do not set caching to zero. VLC will crash.)

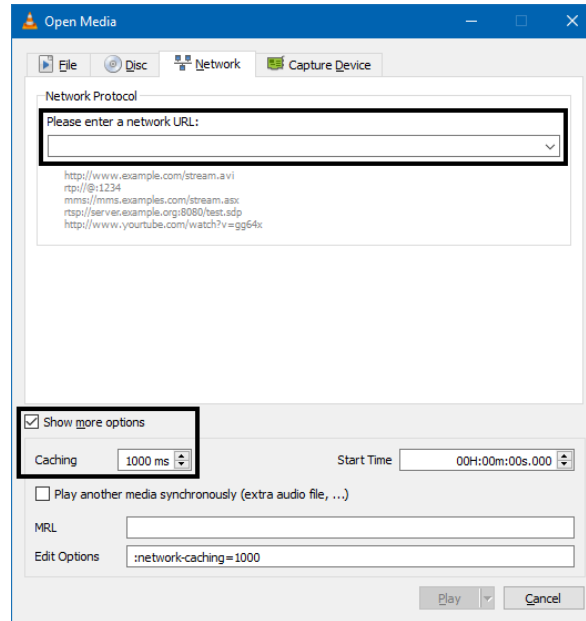Figure 38. Open Media dialog box, Network tab

13. Click Play.

8.7. Playing HLA 1.3 Logger Files in HLA 1516 Federations

In general, the Logger uses the same file format for HLA 1.3 and HLA 1516 Logger files. You can record a Logger file from an HLA 1.3 federation, and play it back into an HLA 1516 federation (and vice versa). However, you must use the same FOM representation during record and playback. For example, if you use an HLA 1.3-style FED file during recording, you must use an HLA 1.3-style FED file during playback, even if you are using the IEEE 1516 version of the Logger and an IEEE 1516 RTI. (VR-Link and the MAK RTI allow you to use HLA 1.3-style FED files with IEEE 1516-based federates, and vice versa).

The main reason that consistency in FOM format is necessary is that IEEE 1516 uses different names for the "Root" classes of the Object class hierarchies. A 1.3-style FED file requires a Root class called Object-Root, whereas a 1516-style XML files requires a Root class called HLAObjectRoot. The reason this can be a problem is that if the Logger is playing an HLA 1.3-based Logger file into a federation that is using a 1516-based XML file, it might come across an instance of a class called, for example, "ObjectRoot.Vehicle". If it tries to register an object of this class, the RTI will complain that no such class exists. There might be a class called HLAObjectRoot.Vehicle in the current FOM, but the RTI or Logger does not know that this is actually the same class.



9. Annotating Logger Files

This chapter explains how to add annotations to Logger files.

9.1. Annotating a Logger File	138
9.2. Adding an Annotation	138
9.2.1 Adding an Instant Point Annotation	139
9.2.2 Dynamically Resetting an Annotation's Start or End Time (Update)	140
9.3. Saving an Annotation File	140
9.4. Opening an Annotation File	140
9.5. Importing an Annotation File	141
9.6. Selecting an Annotation	141
9.7. Editing an Annotation	141
9.7.1 Editing a Point Annotation Directly	141
9.7.2 Editing a Range Annotation Directly	141
9.7.3 Converting an Annotation to the Other Annotation Type	141
9.8. Deleting an Annotation	142
9.9. Moving the Timeline Cursor to the Start of an Annotation	142
9.9.1 Moving the Timeline Cursor to the End of an Annotation	142
9.10. Jumping to the Next or Previous Annotation	142
9.11. Zooming the Timeline to an Annotation	142
9.12. Bounding Playback to an Annotation	144

9.1. Annotating a Logger File


An annotation is associated with a particular time or time range in a Logger file. Each annotation has a name, and you can associate text with it. Besides being a way to store information about the events in a Logger file, annotations allow you to quickly zoom in on a file or bound playback to a segment of a file. The Annotations View has a context-sensitive menu from which you can execute the various annotation commands.

9.2. Adding an Annotation


► To annotate a Logger file:

1. Choose **View > Annotations**. Annotations, if any, are displayed in the Logger data display area (Figure 39).

Figure 39. Annotations display

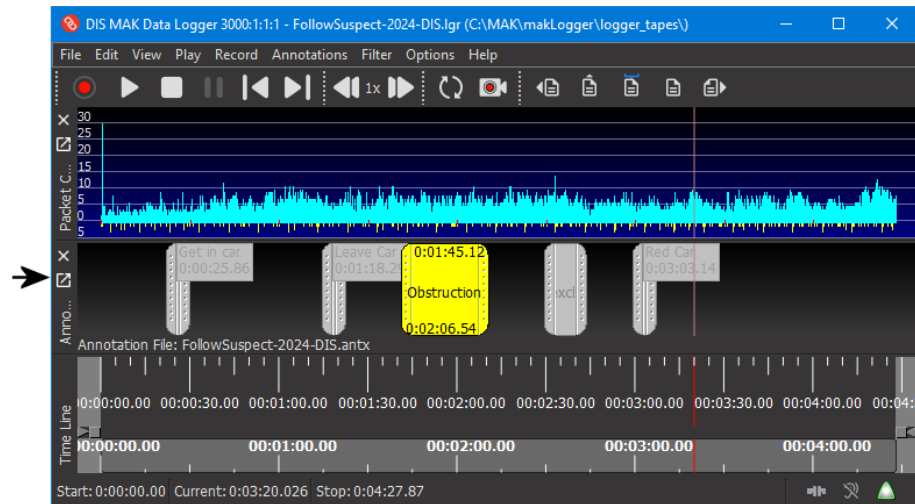

2. Choose **Annotations > Create > *annotation_type***, where *annotation_type* is Point Annotation, Range Annotation, or an instant annotation. (For details about inserting instant annotations, see "9.2.1 Adding an Instant Point Annotation" on the facing page.) The Point Annotation (or Range Annotation) dialog box opens.

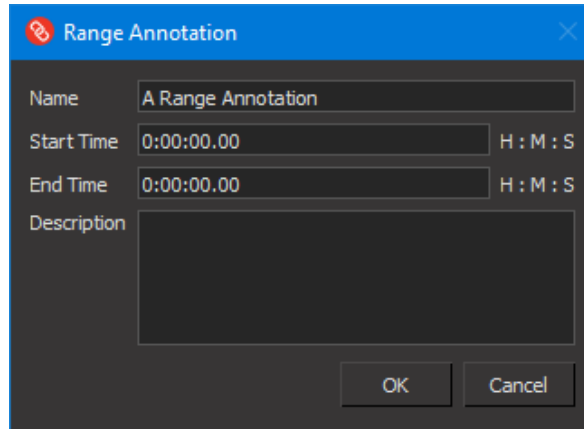Figure 40. Range Annotation dialog box

 The image shows a 'Range Annotation' dialog box with a blue title bar and a close button. It contains four fields: 'Name' with the text 'A Range Annotation', 'Start Time' with '0:00:00.00', 'End Time' with '0:00:00.00', and a 'Description' text area. To the right of the time fields are labels 'H : M : S'. At the bottom are 'OK' and 'Cancel' buttons.

3. In the Name text box, enter a name for the annotation. The name displays in the annotation view.
4. Optionally, change the timepoint. For a point annotation, the default time for the annotation is the current timepoint. For a range annotation, the default start time and end time for the annotation's time range is the current timepoint. The time is specified in hour:minute:second.tenth_of_second format.
5. Optionally, in the Description box, enter any text that you want to accompany the annotation.
6. Click OK. The annotation is added to the Annotations window (Figure 39 on the previous page).

i If you create an annotation while the Annotations View is hidden, the Annotations View automatically displays.

9.2.1 Adding an Instant Point Annotation

Instant annotations add an annotation at the current time point without requiring you to fill out a dialog box. The annotation time (for point annotations) or start time (for range annotations) is set to the time point. This allows you to quickly add annotations as you play or record a file without needing to stop the file. Typically, you would edit the annotation at a later time.

Instant range annotations are inserted with identical start and end times.

► **To add an instant annotation, do one of the following:**

- Choose **Annotations > Create > Instant Point Annotation** (or **Instant Range Annotation**).
- Press \ (backslash) for a point annotation or [(open square bracket) for a range annotation.
- Click the Add Point Annotation button (📍) or the Add Range Annotation button (📏).

- To set the end time for an instant range annotation, use the Update Annotation feature described in the next section or press the **]** key at the point you want to end the annotation's range.

9.2.2 Dynamically Resetting an Annotation's Start or End Time (Update)

You can easily move a point annotation or change the start or end time of range annotation. Use the Update Annotation command to change the start and end times of the currently selected annotation. (This procedure works while the Logger is playing, recording, or paused.)

When you update a point annotation, it moves to the new time. When you update a range annotation, if the current time is earlier than the start time, the start time is reset. If the current time is later than the start time, the end time is reset.

► **To update an annotation:**

1. Create an annotation or select an annotation.
2. If the recording is paused, click on the zoom timeline at the time point to which you want to update the annotation. (If you are recording or playing a recording, Update uses the current time in the recording.)
3. Choose **Annotations > Update**, press **]** (right bracket), or click the Update Annotation button (📄).

9.3. Saving an Annotation File

You can save annotations to a file. Annotation files have the extension *.antx*.

► **To save annotations to a file:**

1. Create annotations as described in "9.2. Adding an Annotation" on page 138.
2. Choose **Annotations > Save**. The Save Annotation File dialog box opens.
3. Type a name for the annotation file.
4. Click Save.

9.4. Opening an Annotation File

When you open an annotation file, any annotations currently displayed in the Logger window are removed and replaced with the annotations in the file you opened. If you load a file with Play on Load enabled and the file has an annotation file, the annotation file loads automatically.

 You can open annotation files that have been saved in legacy format (*.ant*) and the current format (*.antx*).

► **To open an annotation file:**

1. Choose **Annotations > Open**. The Open Annotation File dialog box opens.
2. Select an annotation file.

3. Click Open. The annotations in the file display.

9.5. Importing an Annotation File

When you import an annotations file, the annotations are added to any annotations that are already displayed in the Logger window.

► **To import an annotation file:**

1. Choose **Annotations > Import**. The Open Annotation File dialog box opens.
2. Select an annotation file.
3. Click Open. The annotations in the file are imported.

9.6. Selecting an Annotation

- To select an annotation, choose **Annotations > Select > *annotation***, where *annotation* is one of the annotations in the list, or in the Annotations View, click the annotation.

9.7. Editing an Annotation

You can edit the properties of an annotation (name, text, and start and end times).

► **To edit an annotation:**

1. Select the annotation and choose **Annotations > Properties**, or double-click the annotation. The Point Annotation or Range Annotation dialog box opens.
2. Edit the properties as desired.
3. Click OK.

9.7.1 Editing a Point Annotation Directly

- To edit the time of a point annotation, drag it to a new time.

9.7.2 Editing a Range Annotation Directly

You can edit the start and end times of a range annotation by dragging its endpoints or dragging the entire annotation.

► **To edit a range annotation:**

- In the Annotations bar, click and hold the left mouse button on an end point of an annotation and drag it to a new time.
- In the Annotations bar, click and hold the left mouse button anyplace inside an annotation's range and drag the entire annotation to a new location.

9.7.3 Converting an Annotation to the Other Annotation Type

You can convert point annotations to range annotations and range annotations to point annotations. The time point of a point annotation becomes the start time of the new range annotation. You can then change the end time as described in previous sections. The start point of a range annotation becomes the time point of a point annotation.

► **To convert an annotation to the other annotation type:**

1. Select the point annotation that you want to convert.
2. Choose **Annotations > Convert To > Range Annotation** (or **Point Annotation**).
3. If you converted a point annotation to a range annotation, specify the end point of the annotation, as described in "9.7. Editing an Annotation" on the previous page.

9.8. Deleting an Annotation

► **To delete an annotation:**

1. Select the annotation you want to delete.
2. Choose **Annotations > Delete**, or press the **Delete** key.

If you remove an annotation from a set of annotations that you have saved to a file, save the edited list with the **File > Save** command.

9.9. Moving the Timeline Cursor to the Start of an Annotation

You can move the timeline cursor to an annotation or the start time of a range annotation.

► **To move the timeline cursor to an annotation:**

1. Select the annotation.
2. Choose **Annotations > Jump to Start**.

9.9.1 Moving the Timeline Cursor to the End of an Annotation

You can move the timeline cursor to the end time of a range annotation.

► **To move the cursor to the end of an annotation:**

1. Select the annotation.
2. Choose **Annotations > Jump to End**.

9.10. Jumping to the Next or Previous Annotation

You can quickly jump to the start of the next or previous annotation, if there is one.


- To jump to the previous annotation, choose **Annotations > Jump to Next**, or click the Jump to Next Annotation button (.
- To jump to the previous annotation, choose **Annotations > Jump to Previous**, or click the Jump to Previous Annotation button (.

9.11. Zooming the Timeline to an Annotation

You can zoom the timeline view to an annotation. For example, in Figure 41, in the first view, the zoom timeline shows the entire length of the file. After zooming to the Gun exchange annotation, the zoom timeline is zoomed to the start and end points of the annotation.

- Zooming the timeline to an annotation does not change the location of the timeline cursor.
- After zooming to an annotation, if you want to zoom out, you can use the mouse scroll wheel to zoom out or the Set Zoom dialog box (**View > Set Zoom**). You will have to manually move the left end of the yellow timeline back to 0 or use the Set Zoom dialog box to reset it.

Figure 41. Zooming to an annotation

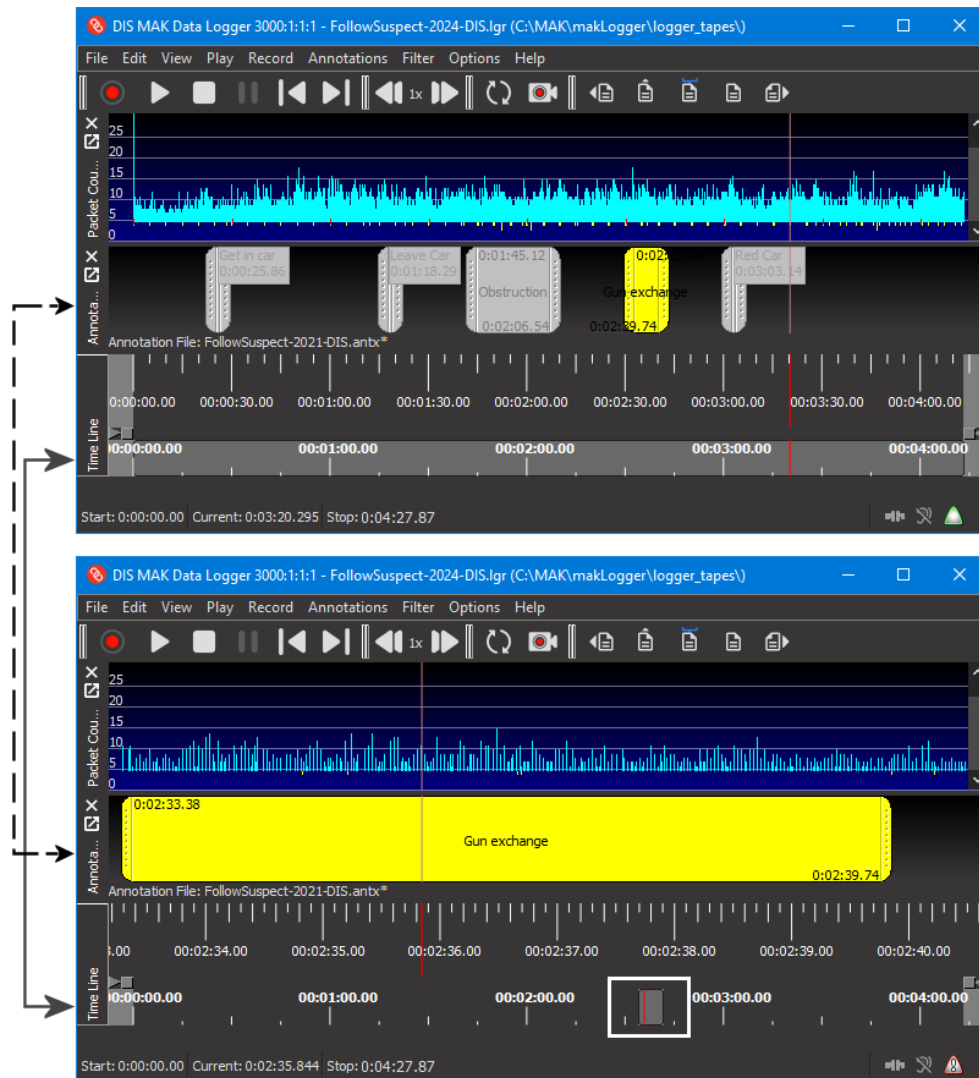


► To zoom the timeline to an annotation:

1. Select the annotation.
2. Choose **Annotations > Zoom to Annotation**. The Annotations bar and the timeline zoom to fit the range of the annotation (Figure 41).

9.12. Bounding Playback to an Annotation

You can set the playback segment to the range of an annotation. For example, in Figure 42, in the first view, the playback handles are at the start and end of the file. After bounding to the annotation, the playback handles are at the start and end points of the annotation. For further comparison, notice that in Figure 41 on the previous page, the playback handles are not affected by zooming to the annotation.

Figure 42. Bounding playback to an annotation

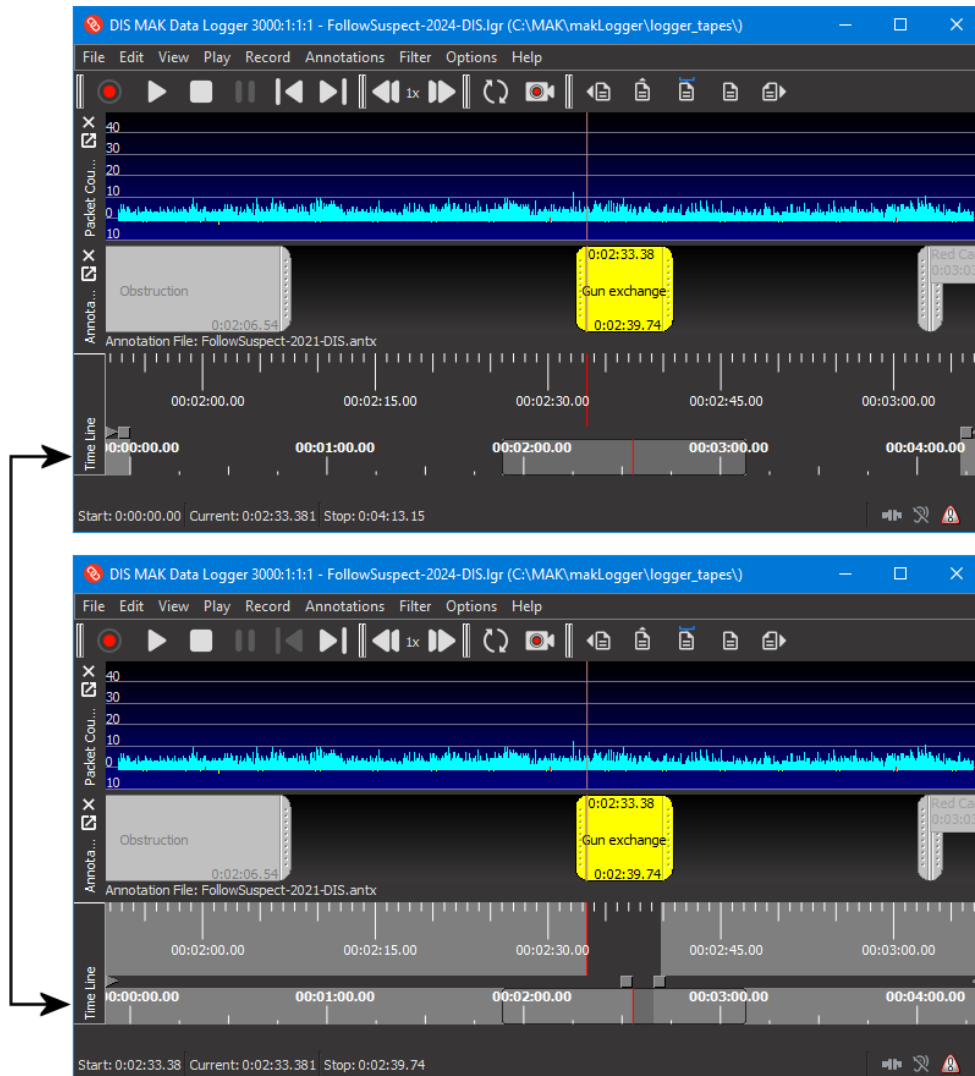

► **To set the playback segment to the range of an annotation:**

1. Select the annotation.
2. Choose **Annotations > Bound to Annotation**. The playback range changes to match the start and end points of the annotation (Figure 42).



10. Filtering Input and Output

This chapter explains how to filter input to the Logger during recording and output during playback.

10.1. Filtering Logger Input and Output	146
10.2. Filtering by Entity Type	146
10.2.1 Removing Entity Types from the Entity Types Lists	147
10.2.2 Configuring the List of Common Entity Types	147
10.3. Filtering DIS PDUs by PDU Kind	147
10.4. Including Custom PDUs in Filter Lists	148
10.5. Filtering DIS Messages by Entity ID	149
10.6. Filtering HLA Messages by Object Name	150
10.7. Filtering HLA Exercises by Class	152
10.8. Filtering by Marking Text	152
10.9. Filtering VR-Forces Messages	153

10.1. Filtering Logger Input and Output

When you record an exercise or play a file, you can filter the input or output. In DIS, you can filter by entity type, entity ID, or PDU. In HLA, you can filter by entity type, class or object name. For both protocols, you can filter by marking text. During a Logger session, filter settings apply to both recording and playback. Settings do not persist between sessions.

Besides configuring filters in the GUI, as described in this chapter, you can configure filtering in the *lgrConfig* file by adding `ListItem` elements to the various filter variables.

i The Logger does not apply filters when you export to a database.


10.2. Filtering by Entity Type

You can filter DIS PDUs or HLA update messages by entity type. The procedure is the same in all versions of the Logger.

► **To filter Logger input or output by entity type:**

1. Choose **Filter > By DIS Entity Type** (or for HLA, **By Entity Type**). The Filter by Entity Type dialog box opens (Figure 43). If common entity types are configured in the Logger configuration file or were specified on the command line when the Logger was started, they are listed in the window. If any of them were configured to enable filtering, the check box in the Filtered column is selected.

Figure 43. Filter By Entity Type dialog box

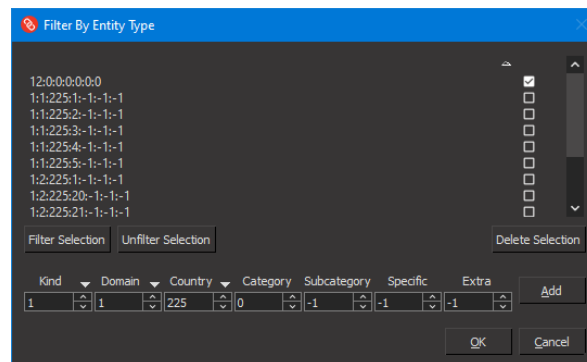

If the entity type that you want to filter is not listed:

- a. Enter the 7-digit enumeration for the entity type you want to filter in the boxes at the bottom of the dialog box.
 - b. Click Add. The entity type is added to the list.
2. To filter out an entity type, check the box in the Filtered column for that entity.
 3. To process a filtered entity, clear its check box in the Filtered column.
 4. To filter or unfilter multiple entities at the same time, select the entities in the list and click Filter Selection or Unfilter Selection.

10.2.1 Removing Entity Types from the Entity Types Lists

- To remove an entity type from the Entity Types lists, select the entity type and then click the Delete Selection button.

10.2.2 Configuring the List of Common Entity Types

You can configure a list of common entity types to populate the Common Entity Types list in the Filter by Entity Type dialog box. To configure a list of entity types, use the `SetCommonEntityTypes` command on the command-line or text interface, or add entries to the `commonEntityTypes` variable in *lgrConfig.xml*, as in this example:

```
<var name="commonEntityTypes" type="list" listtype="string">
  <!-- US tank -->
  <listitem>1:1:225:1:-1:-1:-1</listitem>
  <!-- US armored vehicle -->
  <listitem>1:1:225:2:-1:-1:-1</listitem>
  <!-- US armored utility vehicle -->
  <listitem>1:1:225:3:-1:-1:-1</listitem>
  <!-- US self-propelled artillery -->
  <listitem>1:1:225:4:-1:-1:-1</listitem>
</var>
```

Listing an entity type using `commonEntityTypes` or `SetCommonEntityTypes` does not enable filtering of that entity type. If you use only one of these methods for listing common entity types, then to filter them you must enable filtering in the GUI as described in "10.2. Filtering by Entity Type" on the previous page. If you want to automatically enable filtering for a common entity type, you can do so with the `filterEntityTypes` variable in *lgrConfig.xml* or the `FilterEntityTypes` command. The syntax is the same as for the common entity types variable and command.


If you specify an entity type using `filterEntityTypes` or `SetFilterEntityTypes`, when you open the Filter By Entity Type dialog box, the entity type is listed and the check box in the Filtered column is selected.

The two lists can overlap. Whichever command executes last or comes last in the configuration file takes precedence.

10.3. Filtering DIS PDUs by PDU Kind

- To filter Logger input and output by PDU kind:

1. Choose **Filter > By DIS PDU Kind**. The Filter by PDU Kind dialog box opens (Figure 44).

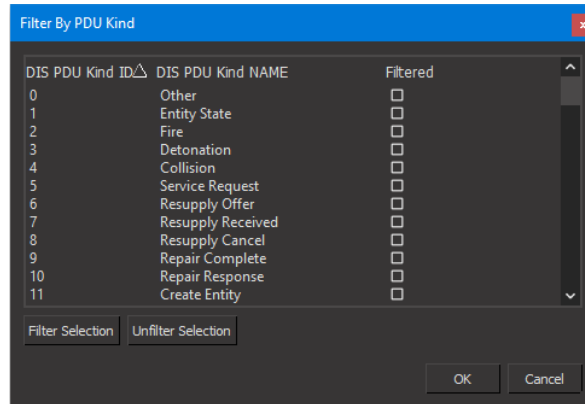Figure 44. Filter By PDU Kind dialog box

2. To change the filtering status of an object, select or clear the check box in the Filtered column for that object.
3. To filter or unfilter multiple objects, select them and click the Filter Selection or Unfilter Selection button.

10.4. Including Custom PDUs in Filter Lists

By default, the Logger lists the PDUs known to VR-Link in the filter lists. If your application uses custom PDUs, you can add them to these lists.

► **To add custom PDUs to the filter list:**

1. Specify a `customPdu` variable in *lgrConfig.xml* for each custom PDU. Each custom PDU must have a unique variable name, as in this example:

```
<var name="customPDU1" type="list" listtype="string">
  <listitem>MyCustomPdu1</listitem>
  <listitem>186</listitem>
  <listitem>12</listitem>
  <listitem>24</listitem>
</var>
```

```
<var name="customPDU2" type="list" listtype="string">
  <listitem>MyCustomPdu2</listitem>
  <listitem>186</listitem>
  <listitem>12</listitem>
  <listitem>24</listitem>
</var>
```

The four fields for each PDU listing are the name of the PDU, the PDU kind, the offset in bytes for the entity ID, and the offset in bytes for the entity type. If there is no entity ID or type, use -1.

- In the commands section of *lgrConfig.xml*, add each custom PDU to the filter list with an AddCustomPDU command, as in this example:

```
<command domain="Simulation" protocol="DIS"
  command="AddCustomPDU">
  <param name="pdu" var="customPDU1"/>
</command>
<command domain="Simulation" protocol="DIS"
  command="AddCustomPDU">
  <param name="pdu" var="customPDU2"/>
</command>
```

10.5. Filtering DIS Messages by Entity ID


In DIS, the Logger can filter by the site:host:entity triplet.

i To filter by entity ID, Logger files must use the Logger 4.3 format or later.

► To filter messages by entity ID:

- Open a Logger file.
- Choose **Filter > By Entity ID**. The Filter By Entity ID dialog box opens (Figure 45).

Figure 45. Filter by Entity ID dialog box

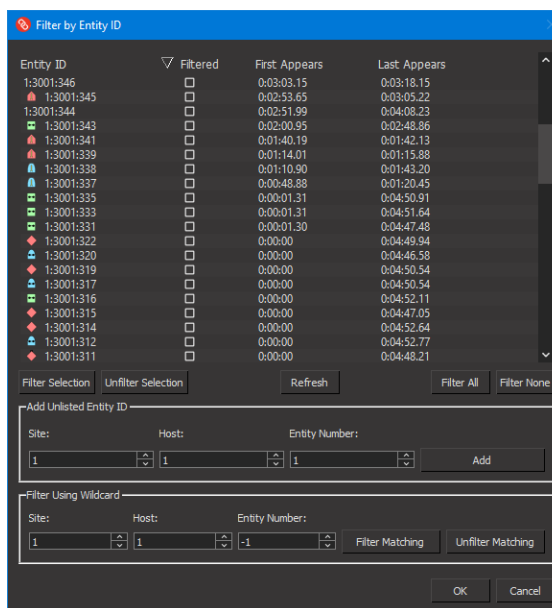

- Specify the entity IDs to filter in any of these ways:

- To filter or unfilter a single entity ID, select or clear its check box in the Filtered column.
 - To filter or unfilter multiple entity IDs at one time, select the entity IDs using standard click, **Ctrl**+click, and **Shift**+click methods, and then click Filter Selection or Unfilter Selection. The check boxes in the Filtered column are selected or cleared.
 - To filter or unfilter all entity IDs, click Filter All or Filter None. The check boxes in the Filtered column are selected or cleared.
 - To filter using wildcards, in the Filter Using Wildcard group box, enter the values for the site:host:entity triplet or use the spin controls to set them. You can use -1 to represent any value. Click Filter Matching or Unfilter Matching to select or clear the check boxes for all matching entity IDs
4. To add an entity ID to the list:
 - a. In the Add Unlisted Entity ID group box, type the values for the site:host:entity triplet or use the spin controls to set them.
 - b. Click Add. The entity ID is added to the list.
 5. Click OK.

10.6. Filtering HLA Messages by Object Name


You can filter HLA messages by object name.

 To filter by object name, Logger files must use Logger 4.3 format or later.

► **To filter messages by object name:**

1. Open a Logger file.
2. Choose **Filter > By Object Name**. The Filter by Object Name dialog box opens (Figure 46).

Figure 46. Filter by Object Name dialog box

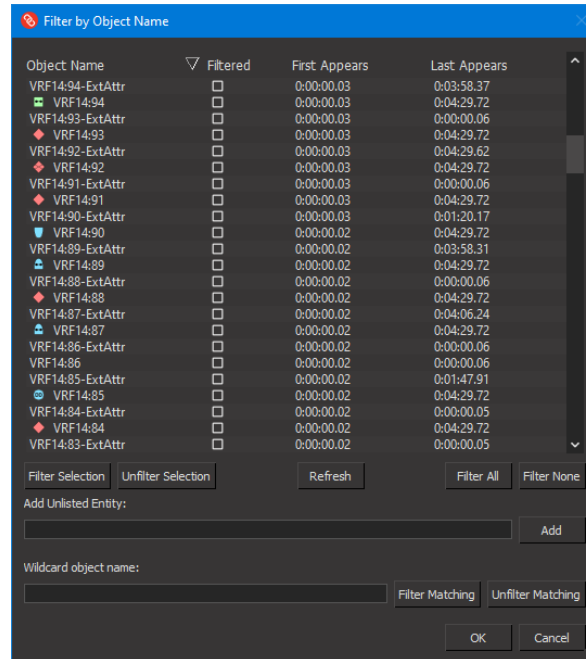


3. Specify the object names to filter in any of these ways:
 - To filter or unfilter a single object name, select or clear its check box in the Filtered column.
 - To filter or unfilter multiple object names at one time, select the object names using standard click, **Ctrl**+click, and **Shift**+click methods, and then click Filter Selection or Unfilter Selection. The check boxes in the Filtered column are selected or cleared.
 - To filter or unfilter all object names, click Filter All or Filter None. The check boxes in the Filtered column are selected or cleared.
 - To filter using wildcards, in the Wildcard Object Names box, enter a text string that you want to match. Use an asterisk (*) to match an indeterminate number of characters. Use a question mark (?) to match a single character. Click Filter Matching or Unfilter Matching to select or clear the check boxes for all matching object names.
4. To add an object name to the list:
 - a. In the Add Unlisted Entity box, type the object name that you want to add to the list.
 - b. Click Add. The object name is added to the list.
5. Click OK.

10.7. Filtering HLA Exercises by Class

► To filter Logger input and output by class:

1. Choose **Filter > By Class**. The Filter By Class dialog box opens (Figure 47).

Figure 47. Filter By Class dialog box

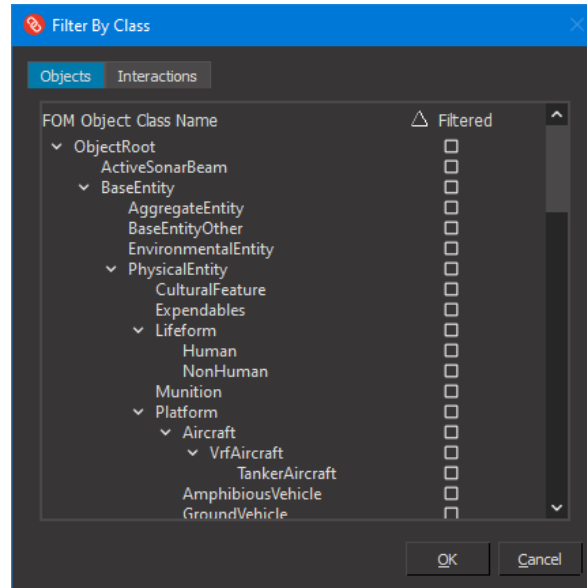

2. Select the Objects tab to filter object classes. Select the Interactions tab to filter Interaction classes.
3. To change the filtering status of an object, select or clear the check box in the Filtered column for that object.

i Selecting or clearing a parent object selects or clears all of its child objects.


10.8. Filtering by Marking Text

You can filter messages by the marking text of the objects. You can filter specific names in the list or use wild cards. You can also add marking text

► **To filter by marking text:**

1. Choose **Filter > By Marking**. The Filter By Marking dialog box opens (Figure 48).

Figure 48. Filter By Marking dialog box

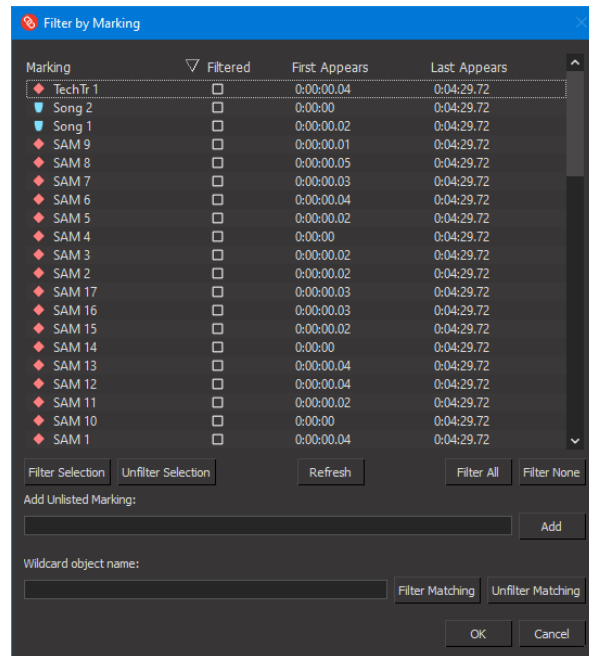

2. In the list of objects, select the ones that you want to filter or unfilter.
3. Click Filter Selection or Unfilter Selection.
4. To filter all objects, click Filter All.
5. To clear all selections, click Filter None.
6. If you want to filter marking text that is not present in the list, in the Add Unlisted Marking box, enter the text and then click Add.
7. If you want to filter using wildcards, in the Wildcard Object Name box, enter the wildcard string and then click either Filter Matching or Unfilter Matching.
8. Click OK.

10.9. Filtering VR-Forces Messages


If you are recording a simulation that includes messages sent by VR-Forces, MAK's computer generated forces product, you should filter out the internal messages that VR-Forces sends between the VR-Forces GUI and simulation engine. These messages are meaningless for playback by the Logger. Filtering is enabled by default for both recording and playback.

❗ Filtering of VR-Forces messages is enabled by default. Changing the default message ID range is not recommended unless you have specific instructions from MAK or a local developer who has changed the range of message IDs used by a customized version of VR-Forces.

► **To filter out VR-Forces messages:**

1. Choose **Filter > VR-Forces Messages**. The Filter VR-Forces Messages dialog box opens (Figure 49).

Figure 49. Filter VR-Forces Messages dialog box

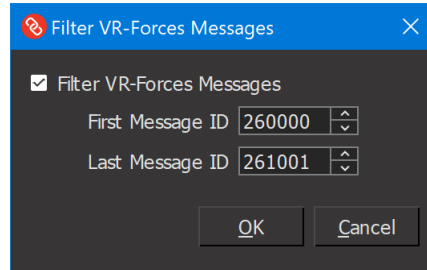

2. Select the Filter VR-Forces Messages check box.
3. Specify the range of message IDs to filter out.
4. Click OK.



11. Analyzing HLA Data

This chapter explains how to use the HLA Traffic Analyzer to analyze HLA data.

11.1. The HLA Traffic Analyzer	156
11.1.1 Showing or Hiding the HLA Traffic Analyzer	156
11.2. Traffic Analyzer Data Views	156
11.2.1 Hiding the Attributes Pane	157
11.3. How the Traffic Analyzer Evaluates Data	157
11.3.1 Representing Complex Datatypes	158
11.3.2 Datatype Representations Included in the Traffic Analyzer	158
11.4. Viewing Object and Interaction Classes and Attributes	159
11.4.1 Viewing the Attributes of an Object Class	159
11.4.2 Viewing the Parameters of an Interaction Class	159
11.5. Viewing Object Instances	160
11.6. Viewing Interaction Instances	161
11.7. Configuring the HLA Traffic Analyzer	162
11.7.1 Changing the Data Delimiter	163
11.7.2 Mapping Datatypes	163
11.7.3 Configuring Attribute Display Options	164
11.7.4 Mapping Entity Type Enumerations to Strings	165
11.7.5 Removing Brackets from the Display of Array Types	165

11.1. The HLA Traffic Analyzer

The HLA versions of the Logger include a Traffic Analyzer view. The Traffic Analyzer provides details about the FOM you are using and displays the data for the current known object instances and recent interactions. By examining the classes, you can debug problems that you are experiencing in your federation, such as an entity's location not being within the area for the scenario or an interaction missing parameter values.

► **To enable the HLA Traffic Analyzer:**

1. Choose **Options > Preferences**. The Logger Preferences open.
2. Select the HLA Traffic Analyzer Settings page.
3. Select the Enable HLA Traffic Analyzer check box then click OK.
4. Close and relaunch the Logger.

i To enable the HLA Traffic Analyzer using the config file, edit the *lgrConfigHLA1516e.xml* file located in the *./bin64* directory and then set the value for this line to true:

```
<var name="enableTrafficAnalyzer" type="bool" value="true"/>
```

11.1.1 Showing or Hiding the HLA Traffic Analyzer

- To display or hide the HLA Traffic Analyzer window, choose **View > HLA Traffic Analyzer**.


11.2. Traffic Analyzer Data Views

The traffic analyzer displays HLA data in tabs:

- FOM. Displays the object and interaction classes in the FOM and their attributes.
- Objects. Displays the Logger's current known objects.
- Interactions. Displays the recent interactions passing through the Logger pipeline.

Figure 50 shows an example of the Traffic Analyzer view.

Figure 50. Traffic Analyzer, FOM tab

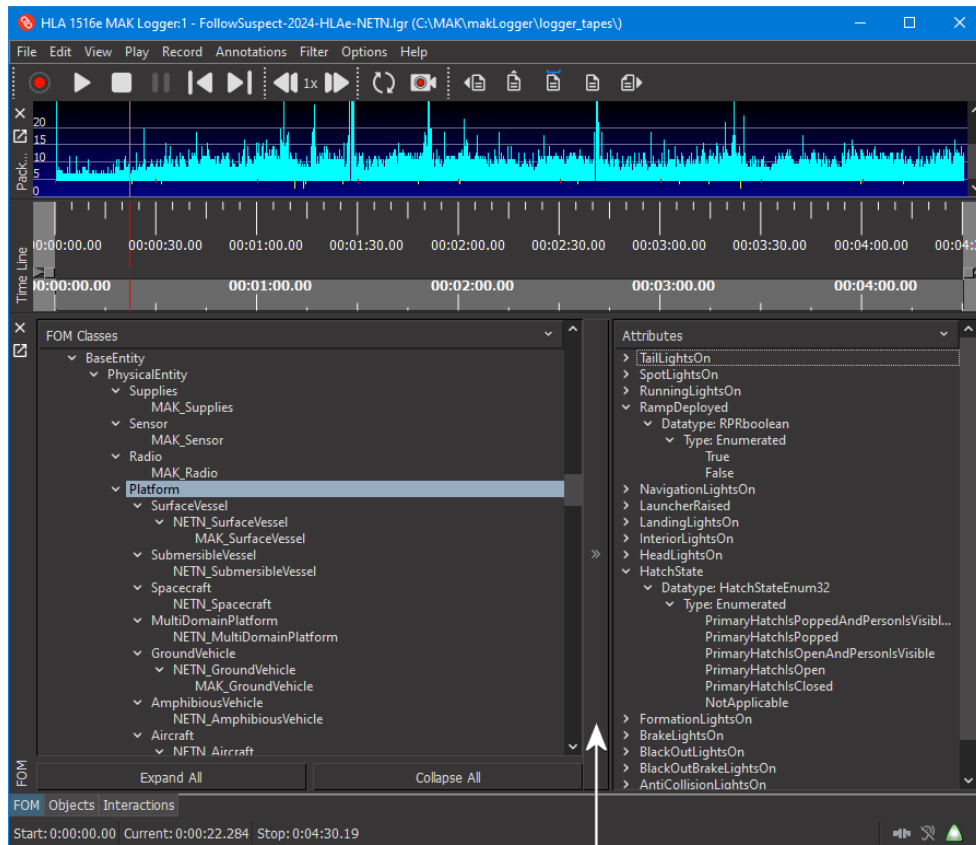

Toggle Attributes Pane

11.2.1 Hiding the Attributes Pane

Each tab on the Traffic Analyzer has a list of classes in the left window pane and a list of attributes for the selected class in the right window pane. You can hide the Attributes pane.

- To hide or show the Attributes pane, click the Toggle Attributes Pane bar (Figure 50).

11.3. How the Traffic Analyzer Evaluates Data

The encodings for data transmitted in an HLA federation execution are specified by the FOM in the various datatype tables (for example, in HLA 1516, basicData, simpleData, fixedRecordData, and so on). In order to analyze the data and represent it in the display, the HLA Traffic Analyzer must break down the FOM datatypes into basic datatype representations that can be directly interpreted by C++ code. The HLA Traffic Analyzer defines a fixed set of basic datatype representations that it can recognize (listed in "11.3.2 Datatype Representations Included in the Traffic Analyzer" on the next page). For each basic datatype found in the FOM, an association must be established to one of these recognizable datatypes. No association is needed if the FOM uses one of the recognized datatype names (for example, HLA 1.3 FOMs use float and int, which are directly recognized).

Although there are defined standards for many datatypes, there is no guarantee that a particular datatype has a standard name. Therefore, the Traffic Analyzer has a translation layer that converts datatypes into data representations. These representations are classes that know how to decode a particular datatype.

For example, an object of type 'ObjectRoot.Country' has an attribute called 'Population' that contains four bytes of data. The Traffic Analyzer looks up the datatype of the attribute. In this case, the 'Population' attribute is found to have a datatype "fixed-number". If the Traffic Analyzer knows that fixed-numbers are little endian four byte integers, the translation table maps "fixed-number" to "integer-LE". The Traffic Analyzer looks up the "integer-LE" representation and converts the four bytes of data into an integer. The Traffic Analyzer then displays the value in a readable format.

i The Traffic Analyzer gets datatype information from the OMT file for HLA 1.3 and the FED for HLA 1516 and HLA Evolved. For HLA 1.3, the Traffic Analyzer treats the FED file as an OMT file.

Defining translations between datatypes and data representations must be done manually. The Traffic Analyzer defines the most common values, including all of the ones in the RPR FOM. If your federation has a named datatype without a representation, you can edit `<install_dir>/bin/datatypeDefault.mtl` to add your datatype.

The Datatype Mapper lists each of the datatypes in the FOM and its representation. For details, see "11.7.2 Mapping Datatypes" on page 163.

11.3.1 Representing Complex Datatypes

Some attributes are more complex than a single datatype. Arrays, fixed, complex, and other types of attributes are combinations of datatypes. Complex datatypes are decoded separately and then merged using delimiters. For example, a comma-delimited array of numbers looks like this: 5, 4, 3, 2, 1. A delimiter defined as "" merges all values together, like this: 54321.

By default, the Traffic Analyzer uses a comma as the delimiter. You can change the delimiter by editing `datatypeDefault.mtl`, or you can change the value in the Delimiter Mapper (see "11.7.1 Changing the Data Delimiter" on page 163).

11.3.2 Datatype Representations Included in the Traffic Analyzer

The Traffic Analyzer ships with the following datatype representations, which should cover all but the most proprietary encoding formats:

- int – Signed four-byte integer in network or big endian format.
- unsigned-int – Unsigned four-byte integer in network or big endian format.
- int-LE – Signed four-byte integer in little endian format.
- unsigned-int-LE – Unsigned four-byte integer in little endian format.
- long – Signed eight-byte integer in network or big endian format.
- unsigned-long – Unsigned eight-byte integer in network or big endian format.
- long-LE – Signed eight-byte integer in Windows or little endian format.

- unsigned-long-LE – Unsigned eight-byte integer in little endian format.
- short – Signed two-byte integer in network or big endian format.
- unsigned-short – Unsigned two-byte integer in network or big endian format.
- short-LE – Signed two-byte integer in little endian format.
- unsigned-short-LE – Unsigned two-byte integer in little endian format.
- float – Four-byte floating point number in network or big endian format.
- float-LE – Four-byte floating point number in little endian format.
- double – Eight-byte floating point number in network or big endian format.
- double-LE – Eight-byte floating point number in little endian format.
- byte – A single byte written as a number 0-255.
- hex – A single byte written as a hex number 00-FF.
- bool – A single byte representing 'false' if zero or 'true' if not.
- char – A single byte written as an ASCII value.
- string – A variable number of bytes written as consecutive ASCII values ending in a null.
- unicode – A variable number of bytes written as consecutive "utf16" values ending in a null.

11.4. Viewing Object and Interaction Classes and Attributes

The FOM tab (Figure 50) provides a view of all object classes and their attribute information, and all interaction classes and their parameters in the FOM.

The left pane of the FOM window displays an inheritance tree of all known object and interaction classes. The right pane displays the attributes of the selected object or the parameters of the selected interaction. You can expand individual attributes to display datatype information. Complex, fixed, and variant datatypes expand even further to show each one of their components and their datatypes.

The attribute list only shows the attributes specific to the selected object, not its inherited attributes. For example, if you select an object "ObjectRoot.BaseEntity.PhysicalEntity.Platform.Airplane.F18", the attribute list only shows the F18 attributes, not the inherited Airplane attributes. To see the full list for an object, you must view all of the parent objects. (In this example, the parent objects would be Airplane, Platform, PhysicalEntity, BaseEntity, and ObjectRoot.)

11.4.1 Viewing the Attributes of an Object Class

- To view an object's attributes, select the object in the left pane of the FOM tab (Figure 50).


11.4.2 Viewing the Parameters of an Interaction Class

- To view an interaction's parameters, select the interaction in the left pane of the FOM tab (Figure 50).

11.5. Viewing Object Instances

The Objects tab (Figure 51) of the HLA Traffic Analyzer displays all objects that are currently known by the Logger. If the Logger is recording, these are the discovered objects; if it is playing, these are the registered objects.

Figure 51. Objects tab

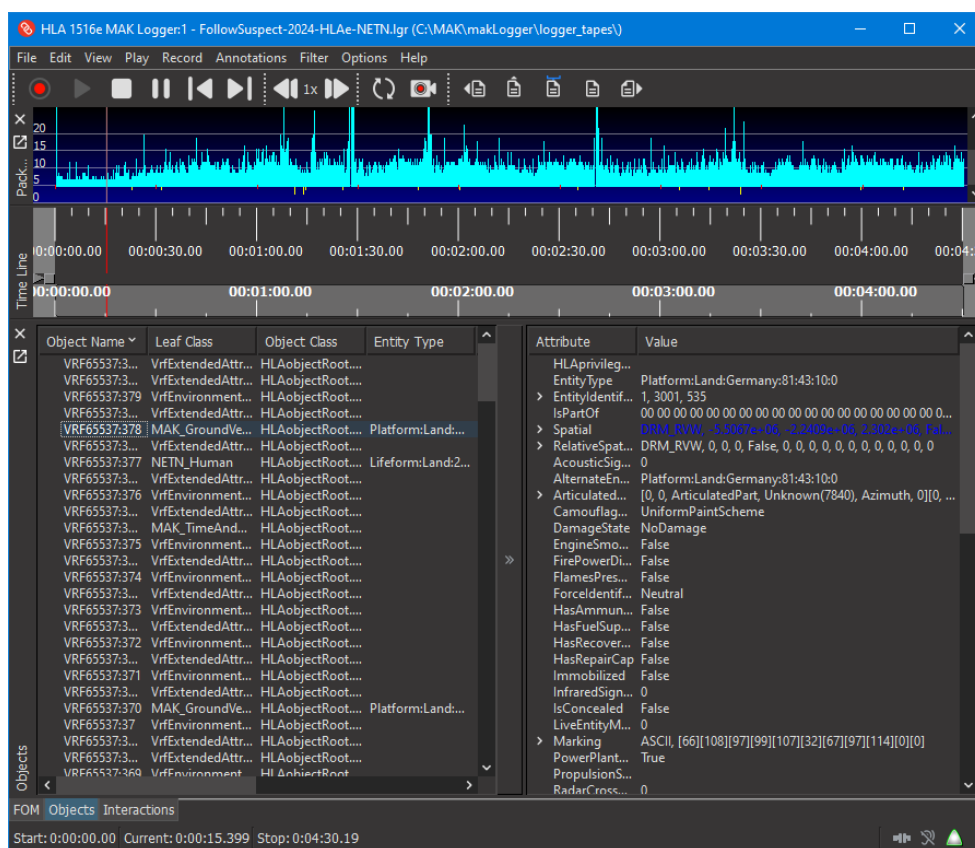

The left pane lists the object name and type of the objects in the federation. If you select an object, attribute information displays in the right pane.

The right pane lists all attributes that the selected object publishes. The attribute's values display using the correct datatype representation: strings appear as strings, numbers appear as numbers, and all the data is human readable. Attribute information displays as follows:

- If an attribute is a defined enumeration, the enumeration text displays instead of the number.
- If a datatype is a complex or a fixed value, expanding the attribute displays the individual datatypes.
- If an attribute is an array, the array is divided and each datatype displays separately.
- If an attribute is a variant, then the correct variant value displays as long as it is known.


All attribute data is updated in real time.

The attributes displayed on this panel include all inherited attributes.

11.6. Viewing Interaction Instances

The Interactions tab (Figure 52) of the HLA Traffic Analyzer displays the interactions in the HLA exercise and information about them.

Figure 52. Interactions tab

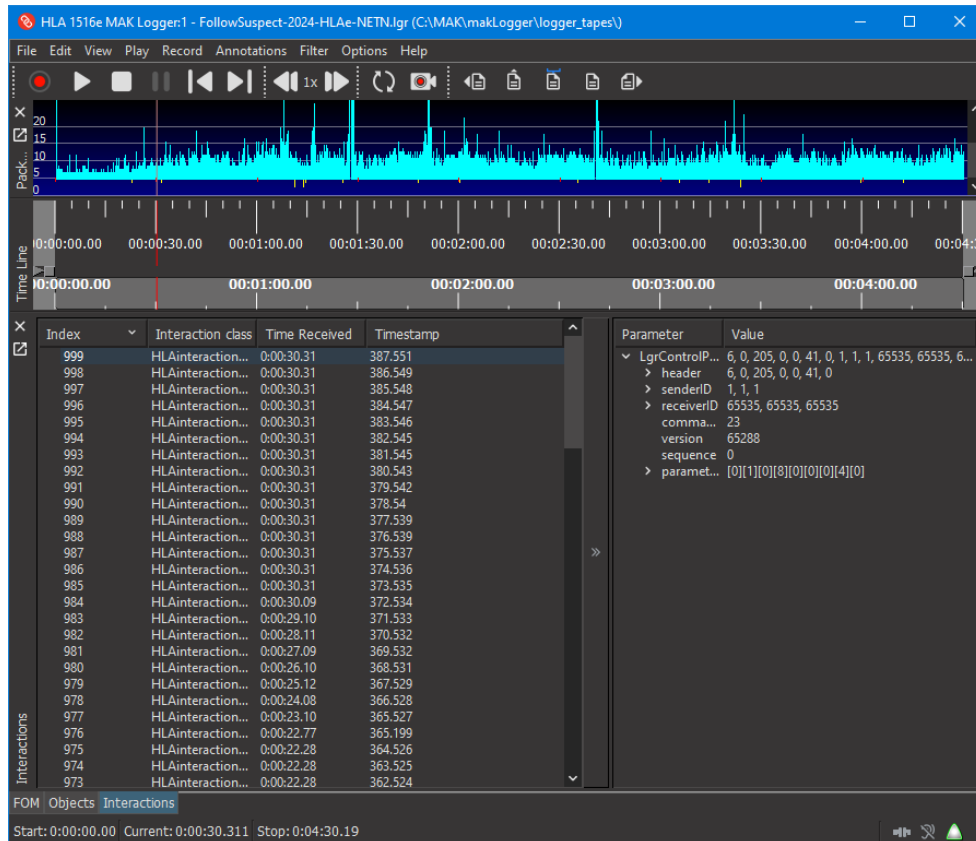

The left pane lists the interactions in the federation. The traffic analyzer lists the 100 most recent interactions sent. As new interactions are added, the oldest ones are dropped from view. You can configure the maximum number of interactions displayed in the HLA Traffic Analyzer Options dialog box or by editing the `max-interaction-count` variable in `./bin64/trafficAnalyzerConfig.mtl`.

Each interaction in this panel is listed with its name, its interaction type, and the time that it was received. Selecting an interaction displays information about that particular instance in the right pane.

The right pane lists the parameters for the selected interaction. The parameter values display using the correct datatype representation: strings appear as strings, numbers appear as numbers, and all the data is human readable. Information displays as follows:

- If a parameter is a defined enumeration, the enumeration text displays instead of the number.

- If a datatype is a complex or a fixed value, expanding the attribute displays the individual datatypes.
- If a parameter is an array, the array is divided and each datatype displays separately.
- If a parameter is a variant, the correct variant value displays as long as it is known.

The parameter details include all inherited parameters.

11.7. Configuring the HLA Traffic Analyzer


You can configure these Traffic Analyzer settings:

- Maximum number of interactions. The maximum number of interactions to list in the Interactions List. As new interactions beyond this number are sent or received, the oldest ones are removed.
- Default enumeration size.
- Floating point precision.
- Default delimiter.
- Datatype delimiters.
- Datatype mappings.
- Attribute display options.

► To edit HLA Traffic Analyzer options:

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the HLA Traffic Analyzer Settings page (Figure 53).

Figure 53. Logger Preferences dialog box, HLA Traffic Analyzer Settings

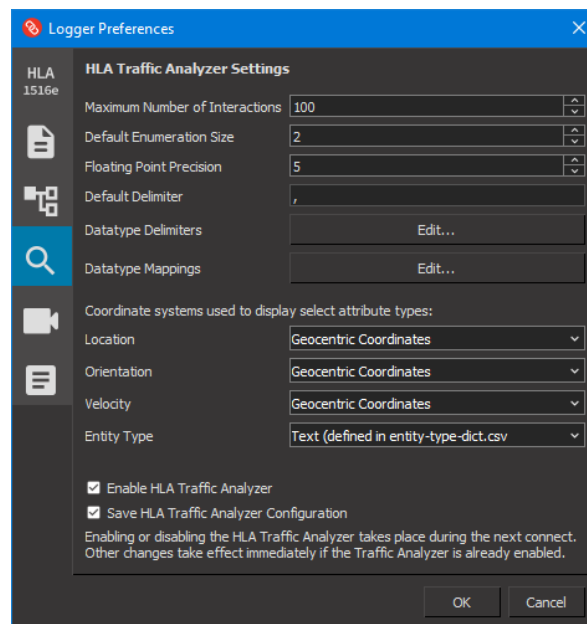

3. Change the values as desired. For details about changing delimiters and datatypes, see "11.7.2 Mapping Datatypes" below and "11.7.1 Changing the Data Delimiter" below.

11.7.1 Changing the Data Delimiter


As described in "11.3.1 Representing Complex Datatypes" on page 158, the Traffic Analyzer combines the values of complex datatypes using a delimiter. The default delimiter is a comma. You can change the delimiter for complex datatypes, except arrays, using the Delimiter Mapper. (Array elements are always delimited by brackets ([]).)

i A complex type "B" found within a complex type "A" uses the delimiter for "B" for its components. The delimiter for "A" is used before and after the "B" instance.

► **To change the delimiter for a complex datatype:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the HLA Traffic Analyzer Settings page (Figure 53 on the previous page).
3. On the Datatype Delimiters line, click Edit. The Delimiter Mapper dialog box opens (Figure 54).

Figure 54. Delimiter Mapper dialog box

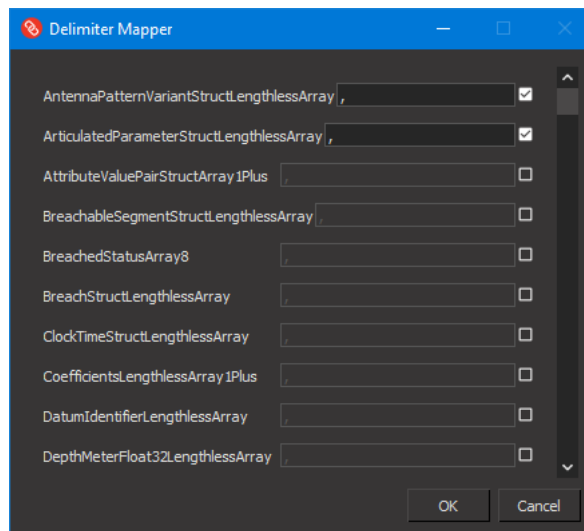

4. Select the check box to the right of the each datatype for which you want to change the delimiter. The text field becomes editable.
5. Replace the current delimiter with the character you want to use.
6. Click OK.


11.7.2 Mapping Datatypes

You can use the Traffic Analyzer to change the datatype mappings assigned to known datatypes. Mappings write to *datatypeDefault.mtl*.

► **To change datatype mappings:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the HLA Traffic Analyzer Settings page (Figure 53 on page 162).
3. On the Datatype Mappings line, click Edit. The Datatype Mapper dialog box opens (Figure 55).

Figure 55. Datatype Mapper dialog box

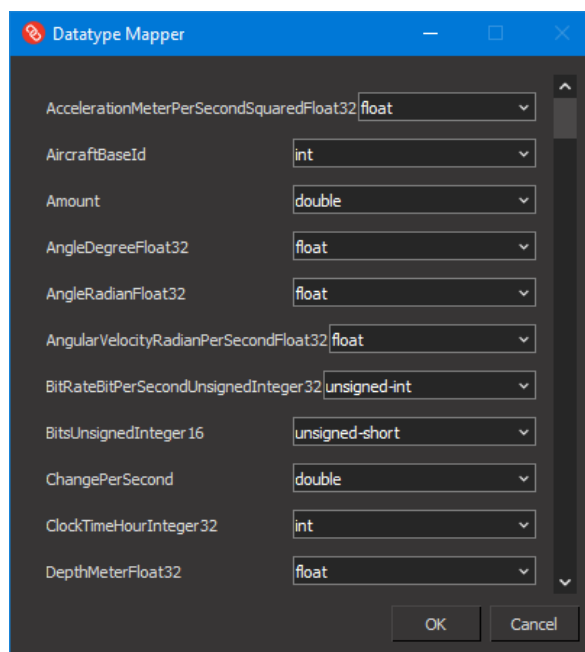

4. For each datatype whose mapping you want to change, select the new datatype from the associated list.
5. Click OK.

11.7.3 Configuring Attribute Display Options

You can specify the coordinate system used to display location, orientation, and velocity for entities. You can also specify how the entity type displays.

 This option is only available for RPR FOM FOM mappers.

► **To specify entity display options:**

1. Choose **Options > Preferences**. The Logger Preferences dialog box opens.
2. Select the HLA Traffic Analyzer Settings page (Figure 53 on page 162).
3. For each attribute, choose an option from the list.
4. Click OK.

11.7.4 Mapping Entity Type Enumerations to Strings

In the Objects list, the Traffic Analyzer can map entity type enumerations to the strings that the enumerations represent, for example kind, platform, country, and so on. The mapping is done based on either a CSV file or a file using the SISO enumeration XML document format. The Logger provides a file in each format, `./bin64/entity-type-dict.csv` and `./bin64/SISO-REF-010.xml`.

Figure 56. Entity type mappings

Object Name	Leaf Class	Object Class	Entity Type
VRF14:452-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:452	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:Germany:81:42:2:1
VRF14:451-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:451	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:Germany:81:43:1:0
VRF14:450-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:450	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:Germany:81:43:10:0
VRF14:449-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:449	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:Germany:81:43:10:0
VRF14:448-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:448	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:United Kingdom:81:113:1:0
VRF14:447-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:447	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:United States:81:42:10:0
VRF14:446-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:446	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:Germany:81:43:1:0
VRF14:445-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:445	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:Germany:81:42:2:1
VRF14:444-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:444	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:United States:81:70:0:0
VRF14:443-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:443	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:United States:81:42:10:0
VRF14:442-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:442	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:United States:81:70:0:2
VRF14:441-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:441	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:United States:81:70:0:1
VRF14:440-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	
VRF14:440	GroundVehicle	ObjectRoot.BaseEntity.PhysicalEntity.Platform.Groun...	Platform:Land:United States:81:42:10:0
VRF14:439-ExtAttr	VfExtendedAttr...	ObjectRoot.VfExtendedAttributes	

The file to be used is specified in `trafficAnalyzerConfig.mtl` with the **entity-type-map-file** parameter. The default is `SISO-REF-010.xml`. The syntax is:

```
(entity-type-map-file "0SISO-REF-010.xml")
```

11.7.5 Removing Brackets from the Display of Array Types

By default, the display of array elements in the Traffic Analyzer uses brackets to delimit each element. You can remove the brackets from any array type (Figure 57). For example, in the case articulated parts, if you look in the `MAK-RPR1-1-1.xml` file you will see it is of type `ArticulatedParameterStructArray`, which is composed of elements of type `ArticulatedParameterStruct`. If you add an entry like the following, it removes the brackets from the display of this array data.

```
(arrayBracketMap "ArticulatedParameterStruct" 0)
```

Figure 57. Array data, with and without brackets

ArticulatedParametersArray	ArticulatedParametersArray
[0, 3, 0, ArticulatedPart, PrimaryTurretNumber 1, Azimuth, 0][0, 53, 0, ArticulatedPart, PrimaryTurretNumber 1, AzimuthRate, 0][0, 0, 53, 0, ArticulatedPart, PrimaryTurretNumber 1, AzimuthRate, 0]	0, 3, 0, ArticulatedPart, PrimaryTurretNumber 1, Azimuth, 0
[0, 0, 1, ArticulatedPart, PrimaryTurretNumber 2, Elevation, 0.785]	0, 0, 1, ArticulatedPart, PrimaryTurretNumber 2, Elevation, 0.785
[0, 0, 1, ArticulatedPart, PrimaryTurretNumber 2, ElevationRate, 0]	0, 0, 1, ArticulatedPart, PrimaryTurretNumber 2, ElevationRate, 0
[0, 0, 0, ArticulatedPart, PrimaryTurretNumber 1, Azimuth, 00, 118, 0, ArticulatedPart, PrimaryTurretNumber 1, AzimuthRate, 00, 118]	0, 0, 0, ArticulatedPart, PrimaryTurretNumber 1, Azimuth, 00
[0, 118, 0, ArticulatedPart, PrimaryTurretNumber 1, AzimuthRate, 0]	0, 118, 0, ArticulatedPart, PrimaryTurretNumber 1, AzimuthRate, 0
[0, 118, 1, ArticulatedPart, PrimaryTurretNumber 2, Elevation, 0.785]	0, 118, 1, ArticulatedPart, PrimaryTurretNumber 2, Elevation, 0.785
[0, 119, 1, ArticulatedPart, PrimaryTurretNumber 2, ElevationRate, 0]	0, 119, 1, ArticulatedPart, PrimaryTurretNumber 2, ElevationRate, 0
[0, 120, 2, ArticulatedPart, PrimaryLauncher 1, Azimuth, 0]	0, 120, 2, ArticulatedPart, PrimaryLauncher 1, Azimuth, 0
[0, 120, 2, ArticulatedPart, PrimaryLauncher 1, AzimuthRate, 0]	0, 120, 2, ArticulatedPart, PrimaryLauncher 1, AzimuthRate, 0

In almost all cases, array data is more readable with brackets. The one case where it makes sense to not use brackets is when the data is an array of characters.

Attributes that are ASCII strings (such as RPR FOM marking text) are sometimes encoded as an array of characters or other datatype (for example, HLAoctet). For strings, the brackets add unnecessary clutter. The brackets can be removed using the **arrayBracketMap** option in the *datatypeDefault.mtl* file, but that would affect all arrays of the given data type. As an alternative, you can map a FOM attribute name or data type field name to another datatype (for example, string) using the **attributeMap** option. This option only affects attributes or data type fields with the given name, for example:

```
(attributeMap "MarkingData" "string")
```



12. Editing Logger Files

This chapter explains how to merge, concatenate, and edit Logger files.

12.1. Editing Files	168
12.1.1 Reverting to the Saved Version of a File	168
12.2. Clearing and Deleting Segments of a File	168
12.3. Merging Files	170
12.4. Concatenating Files	170
12.5. Trimming Files	170
12.6. Offsetting Files	171

12.1. Editing Files

The Logger has these options for editing files:

- Merge two files.
- Add a file to the beginning or end of another file.
- Clear a portion of a file of data and leave empty space.
- Delete a portion of a file.
- Trim dead space at the beginning of a file.
- Offset the timestamps of packets.



- When you edit a file, the changes are not saved automatically. The title bar adds an asterisk to the file name to indicate that it has changed. To retain your edits, you must save the edited file when you finish editing it.
- If you edit a file that has a video associated with it, the video is not edited. Depending on the type of editing you do, after editing, the data stream and video stream may no longer correlate.

12.1.1 Reverting to the Saved Version of a File

If you edit a file and decide that you want to remove all edits, you can revert to the previously saved version of the file. This option is available only for files that have a saved version. You cannot apply it to unsaved, new recordings.

- To revert to the previously saved version of a file, choose **File > Revert**.

12.2. Clearing and Deleting Segments of a File

You can select a portion of a file and either clear or delete it. Clearing a portion of a file removes all packets within the selection but does not change the timestamps of the packets that follow the cleared section. The result is empty space in the file.

If you delete a section of a file, all packets and any associated annotations are removed. The packets that come after the deleted section are offset to fill in the empty space. If a range annotation spans the deleted section, its start point or end point is offset to the appropriate amount of time.


Figure 58 shows a Logger file with the segment from 0:30 to 1:30 selected for editing. If the segment is cleared, the file stays the same length, but there are no messages in the cleared segment. If the segment is deleted, the file is shortened by the amount of time deleted. There is no dead space in the file.





Remember, when you clear or delete a portion of a Logger file, it is the white segment in the timeline that you edited. The gray segments are preserved.

Figure 58. Clearing and deleting file segments

Original file

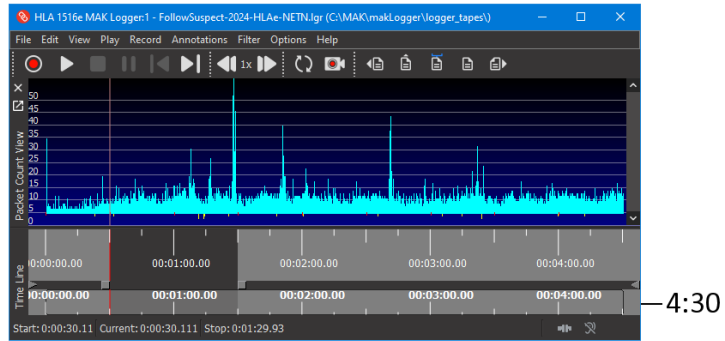

Segment cleared

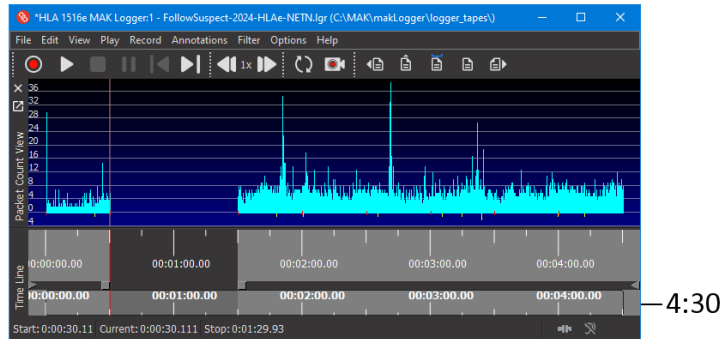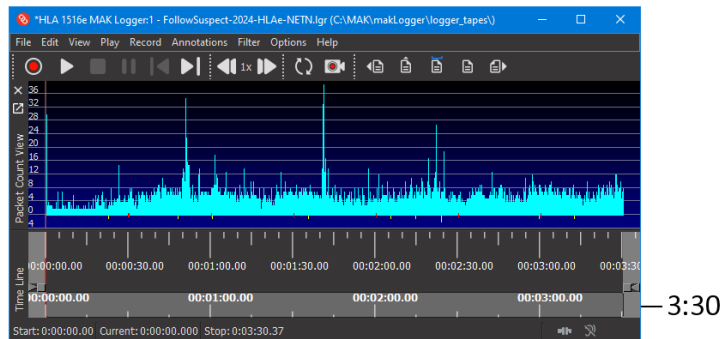Segment deleted
(note the change
in file length)

The Logger adds data, if necessary, to properly remove or add objects that are affected by a clear or delete operation.



- When you delete a portion of a file, it is not placed on the clipboard. You cannot paste it back into the file.
- If you delete a section of a recording that has an initial state packet, the initial state information is lost.

► **To clear a portion of a file:**

1. Open the file.
2. Use the timeline sliders to select the segment you want to clear.
3. Choose **Edit > Clear Section**.

► **To delete a portion of a file:**

1. Open the file.
2. Use the timeline sliders to select the segment you want to delete.
3. Choose **Edit > Delete Section**.
4. Save the edited file.

12.3. Merging Files

When you merge files, the packets for the file that you are merging in are added to the original file in the order of the timestamps. The Logger does not check for duplicate names. It adds new checkpoints using the current checkpoint settings.

Recordings that are merged or concatenated combine their initial state packets. During playback, the initial state packets are processed to appropriately add the entities at the time each initial state is processed.

 To successfully merge HLA files, they must have been created with the same FOM.

► **To merge two files:**

1. Open a file.
2. Choose **Edit > Merge In File**. An Open dialog box opens.
3. Select the file that you want to merge in.
4. Click Open. The selected file is merged into the first file.
5. Save the edited file.

12.4. Concatenating Files

You can concatenate (append) a file to the beginning or end of another file.

 To successfully concatenate HLA files, they must have been created with the same FOM.

► **To concatenate files:**

1. Open a file.
2. Choose **Edit > Append File to End** or **Prefix File to Start**. An Open dialog box opens.
3. Select the file that you want to concatenate.
4. Click Open. The selected file is concatenated to the open file.
5. Save the edited file.

12.5. Trimming Files

When you trim a file, empty space at the beginning is removed and packets are offset so that the first packet is sent at the beginning of the file.

► **To trim a file:**

1. Open the file.
2. Choose **Edit > Trim Start**.
3. Save the edited file.

12.6. Offsetting Files

When you offset a file, a specified number of seconds is added to the timestamp of each packet. (This results in dead space at the start of the file.)

► **To offset a file:**

1. Open the file.
2. Choose **Edit > Offset Time**. The Set Offset dialog box opens.
3. Type the time, in seconds, that you want to offset the file.
4. Click OK.
5. Save the edited file.



13. Exporting Logger Data

This chapter explains how to export Logger files to various data formats.

13.1. Exporting Data	174
13.1.1 ODBC Driver Support	174
13.2. Understanding Exported Data	175
13.3. Exporting Data to a Database	176
Notes	176
13.3.1 Configuring an ODBC Data Source	179
13.3.2 Exporting DIS Data to a Database	179
13.3.3 Exporting HLA Data to a Database	180
13.3.4 The Export Log	180
13.4. Configuring a Data Source for Microsoft Access	180
13.5. Installing MySQL and Configuring a Data Source	183
13.5.1 Installing MySQL and the MySQL ODBC Driver	183
13.5.2 Creating a MySQL Database	184
13.5.3 Configuring a Data Source for MySQL	184
13.6. Exporting Data on Linux	186
13.6.1 Install the ODBC Driver	186
13.6.2 Install MySQL	186
13.6.3 Install and Set Up MySQL	186
13.6.4 Run MAK Data Logger	187
13.7. Importing Logger Data into a Spreadsheet	187
13.7.1 Importing Data from MySQL to Microsoft Excel	187
13.7.2 Importing Data from Access to Excel	190

13.1. Exporting Data

You can export some or all of the data in a Logger file to another supported format.

- You cannot export data while you are in Record mode.
- Before you can export data to a database, you must set up a data source. For details, see "13.3.1 Configuring an ODBC Data Source" on page 179, "13.4. Configuring a Data Source for Microsoft Access" on page 180, and "13.5. Installing MySQL and Configuring a Data Source" on page 183.
- The Logger does not apply filters when you export data.
- When you export data, you can have the data resampled with the current checkpoint policy. For more information, see "5.2. Configuring Indexing" on page 78.

► **To export data:**

1. Open a Logger file.
2. Choose **File > Export to > *format***, where *format* is a supported format, such as Plain Text. A dialog box appropriate to the export type opens.
3. To export to another Logger file or to text, enter a name for the new file and then click OK. For other export types, please see the additional procedures in this chapter.

► **To export part of a Logger file:**

1. Use the timeline sliders to select the portion of a Logger file that you want to export.
2. Choose **File > Export Selection To > *format***.
3. To export to another Logger file or to text, type a name for the new file and click OK. For other export types, see the additional procedures in this chapter.

13.1.1 ODBC Driver Support

The Logger database export feature supports these ODBC drivers:

- MySQL ODBC 2.50 Driver
- MySQL ODBC 5.351 Driver
- MySQL ODBC 5.1 Driver
- MySQL ODBC 5.2w Driver
- Microsoft Access

A 64-bit connector is required.

You can download the MySQL 5.1 server and connector at:

- server: <https://dev.mysql.com/downloads/file/?id=411970>
- connector: <https://dev.mysql.com/downloads/file/?id=411736>

13.2. Understanding Exported Data

The Logger records the data sent over the network using the DIS or HLA protocols. The HLA protocol is further defined by a Federation Object Model. By default, MAK Data Logger products use the Real-Time Platform Reference FOM (RPR FOM) for HLA. For details about DIS and HLA, review the IEEE and SISO standards to understand how the simulation data is sent using these protocols. If you are using HLA, the information you need should be in the SISO RPR FOM document. The DIS standard provides more detail about the data content and when and why data is sent. Standards are available at the IEEE and SISO websites:

- <https://standards.ieee.org>
- <https://www.sisostandards.org>

When the Logger records a DIS exercise, it creates a separate packet for each DIS PDU it receives. The Logger exports the packet data into tables by the PDU type (that is, a different table for each type of PDU). There are columns for:

- The PDU data fields.
- A unique key (per table).
- Packet arrival time (relative to the start of the file at 0.0).
- DIS timestamp.
- Timestamp type.
- Exercise ID.
- PDU size.

Data types that contain an array of data are broken out into subtables (for example, articulated and attached parts). The subtable entries contain a key to link them back to the specific PDU entry.

In DIS, to find out when a particular attribute of an entity changed, you must search through the records for that entity and determine when the value changed. Each entry contains the full contents of the PDU.

When the Logger records an HLA exercise, the HLA classes are divided into Object Classes (state-full data) and Interaction classes (transient data). The Logger creates a separate packet for each Interaction (usually all parameters) and Object update (usually a subset of attributes of changed data, except the first one or two updates for an object) it receives. The Logger exports the data into tables by HLA class.

The Logger exports objects into an object class table format. It exports interactions into an interaction class table format. Interaction tables have columns for each parameter of the Interaction along with a unique key (per table), the arrival time, and the user tag. Objects have an object instance table for all object instances (of all classes) and an update table for each class of object. The object instance table has:

- A unique key (per table).
- Arrival time.
- Object name.

- Object handle.
- Object class name.
- Object class handle.
- Object discovery time.
- Object removal time.

The object update table has columns for each attribute in the object class and a key back to the object instance table to which the update belongs. Again, data types that contain an array of data (or that contain many subfields) are broken out into subtables with a key to link them back to the parent entry.

In HLA, to find out when a particular attribute of an entity changed, you must search through the records for that entity and determine when the value changed. Unlike DIS, most object updates only send changed data (usually location, velocity, acceleration and so on). The record contains null values for those attributes that were not updated. When you look for changes, consider the value NULL as a non-change to the previous non-NULL value. You could look for when NULL changes to non-NULL, but sometimes data that has not changed is transmitted over the network (for example, in response to a request attribute update).

 For both DIS and HLA, the Logger does not clear out a database when exporting. Its export operations are additive.

13.3. Exporting Data to a Database

The Logger can export data to a database using ODBC. See "13.1.1 ODBC Driver Support" on page 174 for a list of ODBC drivers supported. The Logger creates tables that contain the messages it can decode. Optionally, you can create an object instance table and a checkpoint information table. You can apply filters to the data when it is exported.

The Logger uses underscores to separate words that are used as table and row names. Each PDU or HLA class has its own table. Variable length data is stored as indexed data in a subtable that contains the parent table's name followed by the variable's name. For example, if the parent table is aggregateentity, the subtable might be aggregateentity_silentaggregates.

Notes

- Before you can export data to a database, you must set up a data source. For details, see "13.3.1 Configuring an ODBC Data Source" on page 179, "13.4. Configuring a Data Source for Microsoft Access" on page 180, and "13.5. Installing MySQL and Configuring a Data Source" on page 183.
- The 32-bit version of the Logger can only export to data sources created by 32-bit versions of Microsoft Access or MySQL. Similarly, the 64-bit version of the Logger can only export to data sources created with a 64-bit version of Microsoft Access or MySQL.

- You do not need to purchase Microsoft Access to set up a data source for this format. For details, see "13.4. Configuring a Data Source for Microsoft Access" on page 180.
- When the Logger exports data to an existing database, it only overwrites tables for which it is exporting data. If the database has existing tables for which there is no equivalent in the simulation being exported, the resulting database will contain data that does not represent any actual simulation. For example, if you export a simulation that contains detonation interactions to database myLogger and then you export a simulation that does not have detonation interactions to myLogger, the detonation interaction data from the first simulation will still be in the database.

It is your responsibility to ensure that data is exported to a clean database.

- The Logger does not need to be connected to an exercise to export data. If you use a custom filter, however, be sure that the filter does not require the Logger to be connected.

► **To export data to a database:**

1. Open the file you want to export, or stop a current recording and enter playback mode.
2. Optionally, select a segment of the file using the timeline sliders.
3. Choose **File > Export To > Database** or **File > Export Selection To > Database**. The ODBC Export Settings dialog box opens (Figure 59 and Figure 60).

Figure 59. ODBC Export Settings dialog box (DIS)

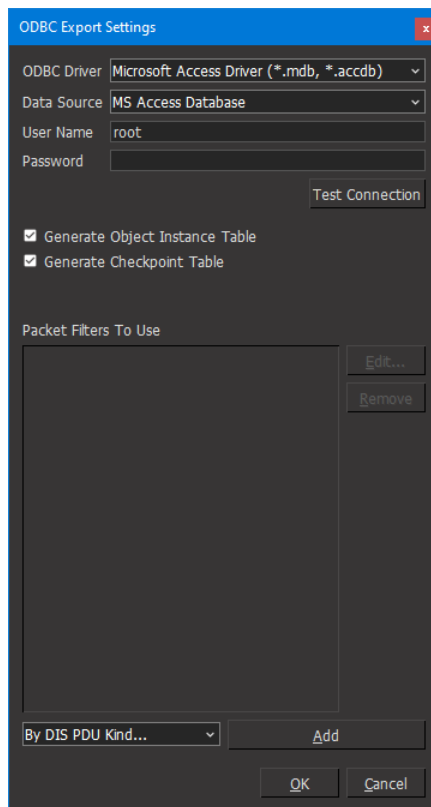
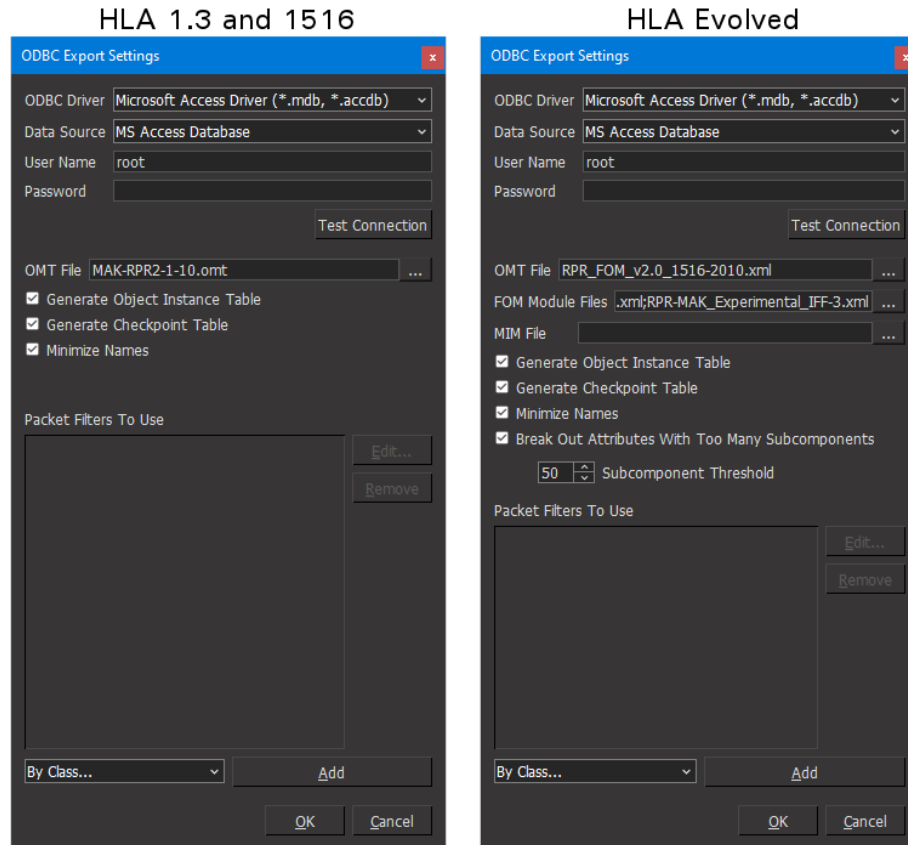


Figure 60. ODBC Export Settings dialog box (HLA)

4. Select an ODBC driver in the ODBC Driver list.
5. Select a data source from the Data Source list.
6. For export to MySQL, enter the user name and password for the data source.
7. Optionally, click Test Connection to test the connection to the data source.
8. For HLA Evolved only, optionally add FOM Modules and a MIM file.

The FOM Module Files entry is a list of files separated by semi-colons. The list can be modified directly or populated using the FOM Module browse button. It selects a single file but it is additive. Each time it is used, the selected file is added to the contents of the FOM Modules entry. If existing values need to be removed, you must edit them directly.

9. Optionally, select or clear the check boxes for the optional tables.
10. Optionally, for HLA export, change the threshold for breaking up attributes into subtables or disable this feature. (RPR FOM 1.0 files should not need to do this, but RPR FOM 2.0 files do. For more information, see "13.3.3 Exporting HLA Data to a Database" on page 180.)

11. Optionally, specify a filter to use while exporting data:
 - a. Select a filter type from the drop-down list.
 - b. Click Add.
 - c. Select the filter in the Packet Filters to Use list.
 - d. Click Edit.
 - e. Edit the list of classes to filter. For details about editing filter lists, see "10.1. Filtering Logger Input and Output" on page 146.
12. Click OK.

13.3.1 Configuring an ODBC Data Source

You must set up a data source before you open the Export To Database dialog box.

On Linux systems, you must edit configuration files. GUIs vary depending on the operating system. The Logger uses the iODBC library to provide ODBC capability. Please visit <http://www.iodbc.org> for details about configuring ODBC:

In Windows, you create and configure data sources using the ODBC Data Source Administrator, as described in "13.5.3 Configuring a Data Source for MySQL" on page 184.



The 32-bit version of the Logger can only export to data sources created by 32-bit versions of Microsoft Access or MySQL. Similarly, the 64-bit version of the Logger can only export to data sources created with a 64-bit version of Microsoft Access or MySQL.

13.3.2 Exporting DIS Data to a Database

The Logger supports export to database of the following DIS PDUs:

- Aggregate State
- Collision
- Designator
- Detonation
- Electronic Emission
- Entity State
- Fire
- Receiver
- Signal
- Start
- Stop
- Transmitter
- Unknown

You can use the plug-in API to write additional PDU encoders, if needed.

13.3.3 Exporting HLA Data to a Database

The Logger can export data from any FOM. If you are using HLA Evolved, it can export data from any FOM module. This is done by processing the FOM's OMT or XML file. One of these files is required to export any HLA data. If the OMT or XML file is poorly formed, incomplete, or ambiguous, or if a data format does not map conceptually to a database table/row format, the Logger might not be able to decode all data. However, the generic implementation handles the majority of data.

The Logger supports export of the following HLA data:

- Simple Data Types.
- Complex Data Types.
- Array Data (XML FOMs only).
- Fixed Cardinality Data.

There is no defined HLA database schema. The schema is dynamically generated using the OMT file. HLA class names can be quite long. The Logger has an option to use the shortest unique name possible. For example, instead of using `HLAObject_PhysicalObject_Platform_Aircraft` it can use `Aircraft`. If there is name collision, each immediate parent class is prefixed to the name until a unique name is found.

When exporting to an Access database, there is a limit of 255 fields for any given table. It is possible that the number of fields generated for a class will exceed this limit. As an example, the RPR FOM 2.0017 `BaseEntity.PhysicalEntity.Platform` subclasses generate over 400 fields, not including the variable length attributes that are already broken out into subtables. The Logger can export these classes by breaking out additional attributes and parameters into subtables. It uses the number of fields an attribute will generate (based on the data type subcomponents) as a trigger. When the number of subcomponents exceeds a specified threshold, the Logger can put that attribute into a separate subtable similar to the variable length data attributes. You can configure whether this threshold is considered and the number of subcomponents it takes in the ODBC Export Settings dialog box.

13.3.4 The Export Log

When you export Logger data, the Logger writes information about the export process to *sql_export.txt* in the *./bin64* directory from which you are running the Logger. The log file is important because it identifies the data that cannot be exported.

13.4. Configuring a Data Source for Microsoft Access


If you want to export data to Microsoft Access, you must configure a data source. You do not need to have Access installed to complete this procedure. However, you must have a Microsoft Access driver installed. Installing Microsoft Office provides this driver. You must install the 64-bit version of MS Office. (You will not be able to manipulate the database if Access is not installed. However, you can open the database in Microsoft Excel, as described in "13.7.2 Importing Data from Access to Excel" on page 190.)

! The 64-bit version of the Logger can only export to data sources created with a 64-bit version of Microsoft Access or MySQL.

► **To configure an ODBC Data Source for Microsoft Access:**


1. To open the ODBC Data Source Administrator dialog box, first open the Control Panel.
2. Select Administrative Tools. (You might need to select System and Security first.)
3. Select Data Sources (ODBC) or ODBC Data Sources (64-bit). The ODBC Data Source Administrator dialog box opens (Figure 61).

Figure 61. ODBC Data Sources Administrator

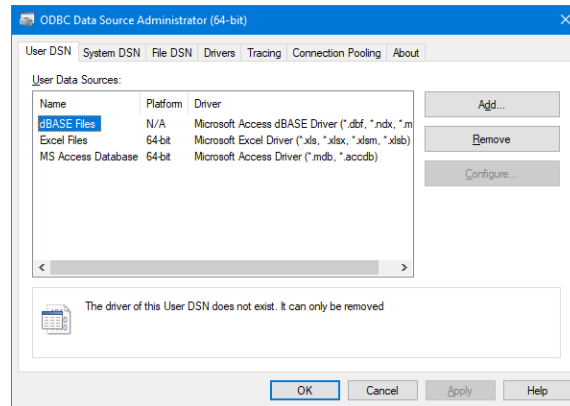


4. If you want the data source to be available to all users, select the System DSN tab. If you want it to be available only for yourself, select the User DSN tab.
5. Click Add. The Create New Data Source window opens (Figure 62).


Figure 62. Create New Data Source window

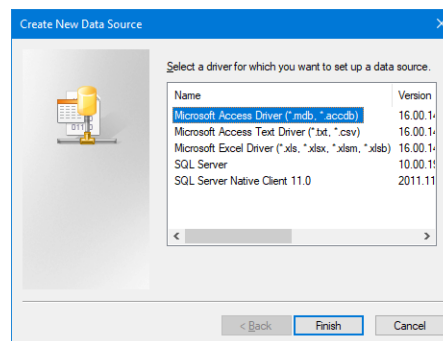


6. Select Microsoft Access Driver (*.mdb, *.acdb). (The Logger looks for a driver with this exact text. Any other driver will not be recognized.)
7. Click Finish. The ODBC Microsoft Access Setup dialog box opens (Figure 63).

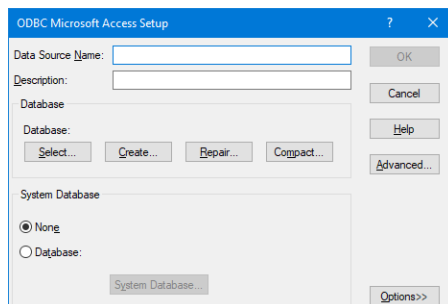Figure 63. ODBC Microsoft Access Setup dialog box


8. In the Data Source Name box, type a name for the data source.
9. In the Database group box, click Create. The New Database dialog box opens (Figure 64).

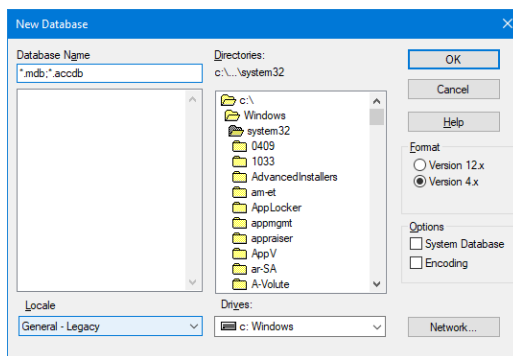Figure 64. New Database dialog box

10. In the Database Name box, enter a name for the database, for example, *myNewLoggerExport.mdb*.
11. In the Directories list, select the directory where you want to create the database (Figure 65).

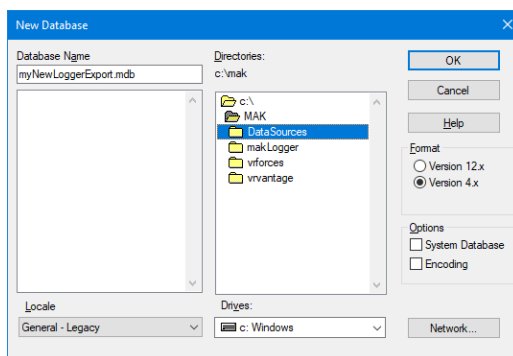Figure 65. Completed New Database configuration

12. Click OK. An informational prompt advises you that the database has been created (Figure 66).

Figure 66. Information prompt

13. Click OK.
14. Continue clicking OK to back out of the dialog box sequence.

The next time you export a Logger file to database using the Microsoft Access driver and data source, it is exported to the database file you created in this procedure.

13.5. Installing MySQL and Configuring a Data Source

This section explains how to install MySQL on Windows and configure a data source. Before you can configure a data source, you must install MySQL and the MySQL ODBC driver, and you must create a MySQL database to configure as the data source. The procedure in this section was developed using MySQL 5.1. See "13.1.1 ODBC Driver Support" on page 174 for a list of supported versions of MySQL. You must use a supported version.

 The 64-bit version of the Logger can only export to data sources created with a 64-bit version of Microsoft Access or MySQL.

13.5.1 Installing MySQL and the MySQL ODBC Driver

When you install MySQL, you must set the root password and then create a database to which you can export Logger data.

► **To install MySQL and the MySQL ODBC driver:**

1. Run the installer for the ODBC driver (called the *mysql-connector-odbc-<version>.msi*).
2. Run the installer for MySQL. Follow the prompts in the installation wizard. When the installation wizard is complete, it prompts you to configure MySQL Server.
3. Select the Configure the MySQL Server Now check box and then click Finish. The MySQL Server Instance Configuration Wizard starts.
4. When you are prompted to configure an instance, choose Configure Instance or Reconfigure Instance, depending on which option is available. Click Next.
5. Choose Standard Configuration. Click Next.
6. Choose Install as Windows Service and Include Bin Directory in Windows PATH. Click Next.
7. On the Security Settings page, enter a new root password. If your system has a root password and you know what it is, enter the current root password. Most Windows systems probably do not have a root password, so you can leave this field blank.

Optionally, create an Anonymous account. Click Next.

8. On the next screen, click Execute.

13.5.2 Creating a MySQL Database

You must create a database before you can set up a data source.

► **To create a MySQL database:**

1. On the Start menu, choose **MySQL > MySQL Command Line Client**. A command window opens and you are prompted to enter a password. (Alternatively, open a command window, cd to the MySQL *bin* directory and enter `mysql -u root -p`.)

2. Type the MySQL password.

3. Type:

```
create database LoggerExport;
```

This creates a database called LoggerExport (or whatever name you choose to use).

4. Type

```
exit
```

13.5.3 Configuring a Data Source for MySQL

The Logger database export feature supports these MySQL ODBC drivers:

- MySQL ODBC 2.50 Driver
- MySQL ODBC 5.351 Driver
- MySQL ODBC 5.1 Driver
- MySQL ODBC 5.2w Driver


For the VC10 64-bit Logger, a 64-bit connector is required.

You can download the MySQL 5.1 server and connector at:


- server: <https://dev.mysql.com/downloads/file/?id=411970>
- connector: <https://dev.mysql.com/downloads/file/?id=411736>

► **To configure an ODBC data source for MySQL:**


1. To open the ODBC Data Source Administrator dialog box, first open the Control Panel.
2. Select Administrative Tools. (You might need to select System and Security first.)
3. Select Data Sources (ODBC). The ODBC Data Source Administrator dialog box opens (Figure 67).

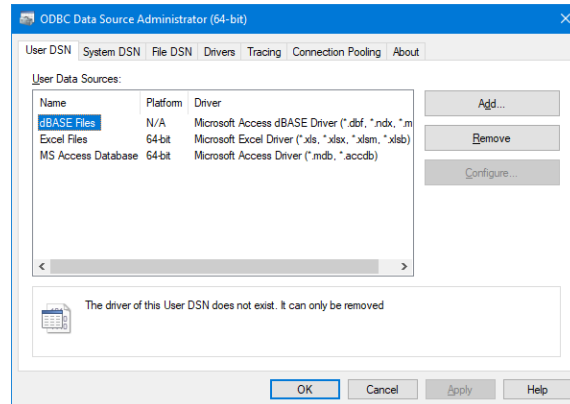Figure 67. ODBC Data Source Administrator dialog box

4. Click Add. The Create New Data Source dialog box opens (Figure 68).

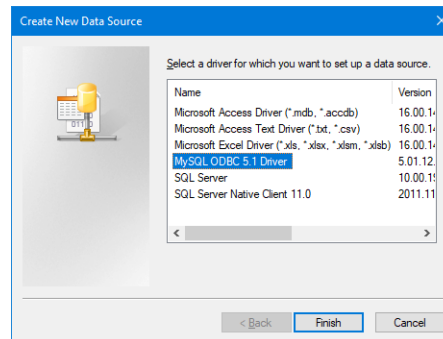Figure 68. Create New Data Source dialog box


5. Select the MySQL ODBC driver.
6. Click Finish. The ODBC Data Source Configuration dialog box opens (Figure 69).

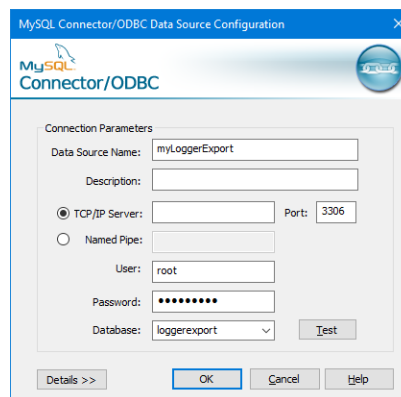Figure 69. MySQL Connector/ODBC Data Source Configuration dialog box

7. Enter a name for your data source.
8. Complete the Server, User, and Password fields.
9. Enter the name of the database that you created for Logger data.

- Click OK. The new data source displays in the ODBC Data Source Administrator dialog box (Figure 70).

Figure 70. ODBC Data Source Administrator dialog box

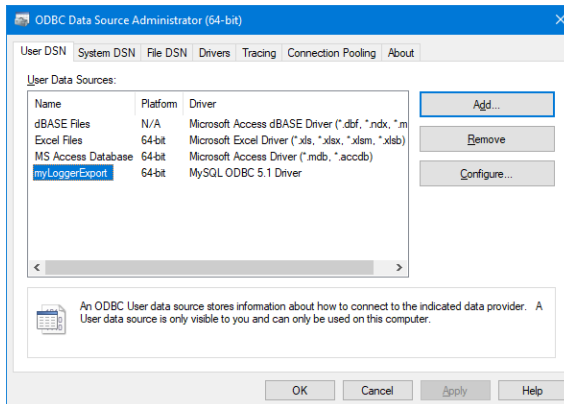

13.6. Exporting Data on Linux

To export Logger data on Linux, you must:

- Install the ODBC driver.
- Set up MySQL.
- Create a database.
- Create and edit *.iodbc.ini*.

13.6.1 Install the ODBC Driver

- Download *libiodbc-3.52.12.tar.gz* at <https://www.iodbc.org/dataspace/doc/iodbc/wiki/iodbcWiki/Downloads>.
- Configure, build and install it.
- Assuming you use the defaults, you now have *./usr/local/lib/libiodbc.so*.

13.6.2 Install MySQL

- Download the MySQL ODBC connector at <https://dev.mysql.com/downloads/connector/odbc>.
- Install the RPM.
- From this, we will use *./usr/lib64/libmyodbc5a.so* (MySQL ODBC Connector 5.3 ANSI driver).

13.6.3 Install and Set Up MySQL

- Install MySQL Server using yum:


```
yum install mysql-server
```
- Start the server:

- ```
service mysqld start
```
3. Create a database:

```
mysql
create database LoggerExport;
```
  4. In your user's home directory, create *.odbc.ini*. Populate it with the following (assumes the previous steps and default values):

```
[ODBC Data Sources]
myDataSource = MySQL ODBC 5.3 ANSI Driver
[myDataSource]
Driver = /usr/lib64/libmyodbc5a.so
Description = MySQL ODBC 5.3 ANSI Driver
Server = localhost
Port =
USER = root
Password =
Database = LoggerExport
Option = 3
Socket = /var/lib/mysql/mysql.sock
```

### 13.6.4 Run MAK Data Logger

1. Set `LD_LIBRARY_PATH` with the command:

```
export LD_LIBRARY_PATH=/usr/local/lib:$LD_LIBRARY_PATH
```
2. Run the Logger. The **Export > Database** menu command should be available and things should be filled out to be able to export.

## 13.7. Importing Logger Data into a Spreadsheet

After you export Logger data to a database, you can examine and manipulate the data just as you would any database. One common way to view the data is to import it into a spreadsheet and use the spreadsheet's tools to analyze it, graph it, and so on.


### 13.7.1 Importing Data from MySQL to Microsoft Excel

This section explains how to import data stored in a MySQL database into Microsoft Excel. (This procedure uses Microsoft Excel 2010. Other versions may have slightly different menu options and dialog box names.)

► **To import data from a MySQL database to Microsoft Excel:**


1. Start Excel.
2. Choose **Data > From Other Sources > From Microsoft Query**. The Choose Data Source dialog box opens (Figure 71).

Figure 71. Choose Data Source dialog box

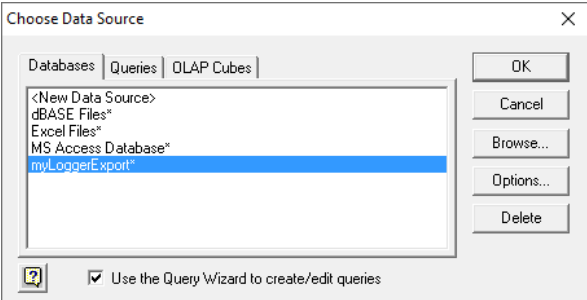


- 3. In the window, select the data source from which you want to import data.
- 4. Click OK. The Query Wizard - Choose Columns dialog box opens (Figure 72). In the Available Tables and Columns window is a list of tables in the database. You can expand each table for a list of the columns in the table.

Figure 72. Query Wizard - Choose Columns

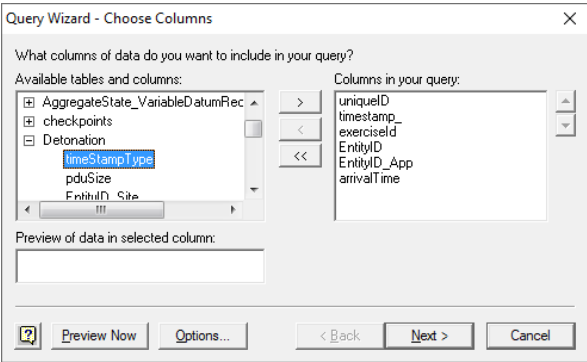


- 5. Select the tables and columns that you want to import to Excel.
- 6. Click the right-facing arrow to move the selected tables and columns to the Columns In Your Query window.
- 7. Click Next. The Query Wizard - Filter Data dialog box opens (Figure 73).

Figure 73. Query Wizard - Filter Data

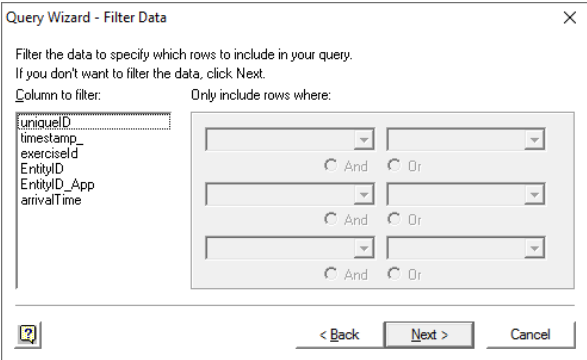


8. Set up any filtering that you want, then click Next. The Query Wizard - Sort Order dialog box opens (Figure 74).

**Figure 74. Query Wizard - Sort Order**

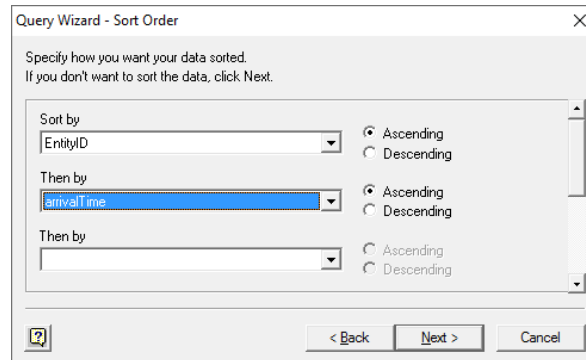


9. Set up any sorting that you want, then click Next. The Query Wizard - Finish dialog box opens (Figure 75).

**Figure 75. Query Wizard - Finish**

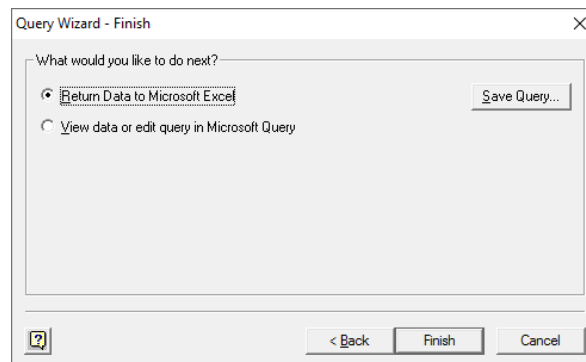

10. Select the Return Data to Microsoft Excel option and click Finish. The Import Data dialog box opens and a cell in the spreadsheet is highlighted (Figure 76).

**Figure 76. Import Data dialog box**

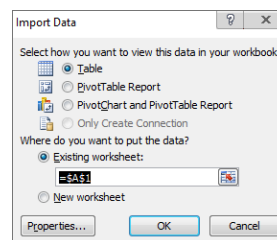

11. Specify where you want the data to be imported to and click OK. The data is imported into the spreadsheet (Figure 77).

Figure 77. Spreadsheet with data imported

|    | A        | B           | C          | D          | E            | F           | G | H | I | J | K |
|----|----------|-------------|------------|------------|--------------|-------------|---|---|---|---|---|
|    | uniqueID | timestamp   | exerciseld | EntityID   | EntityID_App | arrivalTime |   |   |   |   |   |
| 2  | 69       | 1516.823423 | 1          | 1:3006:10  | 3006         | 124.9313801 |   |   |   |   |   |
| 3  | 1        | 484.1252424 | 1          | 1:3009:236 | 3009         | 9.036422491 |   |   |   |   |   |
| 4  | 2        | 484.6636422 | 1          | 1:3009:237 | 3009         | 9.572120786 |   |   |   |   |   |
| 5  | 3        | 485.3328383 | 1          | 1:3009:238 | 3009         | 10.26580024 |   |   |   |   |   |
| 6  | 5        | 503.0621443 | 1          | 1:3009:240 | 3009         | 27.98223853 |   |   |   |   |   |
| 7  | 6        | 503.34989   | 1          | 1:3009:244 | 3009         | 28.32178533 |   |   |   |   |   |
| 8  | 7        | 505.4434078 | 1          | 1:3009:244 | 3009         | 30.36473632 |   |   |   |   |   |
| 9  | 8        | 505.5854509 | 1          | 1:3009:244 | 3009         | 30.49501395 |   |   |   |   |   |
| 10 | 11       | 523.4575326 | 1          | 1:3009:259 | 3009         | 48.36644602 |   |   |   |   |   |
| 11 | 16       | 529.0493382 | 1          | 1:3009:259 | 3009         | 54.01944625 |   |   |   |   |   |
| 12 | 17       | 532.7884549 | 1          | 1:3009:260 | 3009         | 57.6967212  |   |   |   |   |   |
| 13 | 18       | 533.096401  | 1          | 1:3009:260 | 3009         | 58.05586541 |   |   |   |   |   |
| 14 | 19       | 538.1087054 | 1          | 1:3009:260 | 3009         | 63.01631296 |   |   |   |   |   |
| 15 | 21       | 542.8861152 | 1          | 1:3009:260 | 3009         | 67.81868505 |   |   |   |   |   |
| 16 | 24       | 547.6666298 | 1          | 1:3009:260 | 3009         | 72.61590338 |   |   |   |   |   |
| 17 | 61       | 578.246644  | 1          | 1:3009:260 | 3009         | 103.1997027 |   |   |   |   |   |
| 18 | 15       | 527.398162  | 1          | 1:3009:261 | 3009         | 52.33607841 |   |   |   |   |   |
| 19 | 12       | 523.5633356 | 1          | 1:3009:262 | 3009         | 48.47135711 |   |   |   |   |   |
| 20 | 20       | 538.7721229 | 1          | 1:3009:262 | 3009         | 63.72245657 |   |   |   |   |   |
| 21 | 28       | 551.0707939 | 1          | 1:3009:262 | 3009         | 76.04163206 |   |   |   |   |   |
| 22 | 29       | 552.4209945 | 1          | 1:3009:284 | 3009         | 77.38084757 |   |   |   |   |   |
| 23 | 33       | 563.5172797 | 1          | 1:3009:286 | 3009         | 88.47812307 |   |   |   |   |   |
| 24 | 34       | 564.1078267 | 1          | 1:3009:286 | 3009         | 89.05890357 |   |   |   |   |   |
| 25 | 38       | 568.9350838 | 1          | 1:3009:286 | 3009         | 93.86607313 |   |   |   |   |   |


### 13.7.2 Importing Data from Access to Excel

This section explains how to import data from a Microsoft Access database to Microsoft Excel.

► **To import data from Access to Excel:**

1. Create an MS Access data source as described in "13.4. Configuring a Data Source for Microsoft Access" on page 180.
2. Export a Logger file to Access, as described in "13.3. Exporting Data to a Database" on page 176.
3. Start Excel.
4. Choose **File > Open**.
5. Set Files of Type to Access Databases.
6. Select the database that you want to open.
7. Click Open. You may receive a warning prompt. If so, click Open. The Select Table dialog box opens (Figure 78).

Figure 78. Select Table dialog box

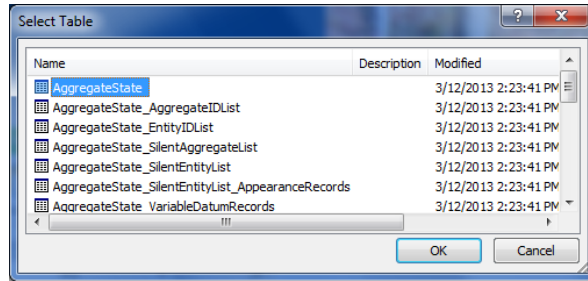

8. Select the table that you want to import.
9. Click OK. The data is imported (Figure 79).

Figure 79. Logger file data imported from Access to Excel

|    | A        | B           | C           | D             | E          | F       | G          | H             | I            |
|----|----------|-------------|-------------|---------------|------------|---------|------------|---------------|--------------|
|    | uniqueID | arrivalTime | timestamp   | timeStampType | exerciseId | pduSize | EntityID   | EntityID_Site | EntityID_App |
| 2  | 1        | 9.036422491 | 484.1252424 | Relative      | 1          | 104     | 1:3009:236 | 1             | 3009         |
| 3  | 2        | 9.572120786 | 484.6636422 | Relative      | 1          | 104     | 1:3009:237 | 1             | 3009         |
| 4  | 3        | 10.26580024 | 485.3328383 | Relative      | 1          | 104     | 1:3009:238 | 1             | 3009         |
| 5  | 4        | 25.6378417  | 500.7063014 | Relative      | 1          | 104     | 1:3009:288 | 1             | 3009         |
| 6  | 5        | 27.98223853 | 503.0621443 | Relative      | 1          | 104     | 1:3009:240 | 1             | 3009         |
| 7  | 6        | 28.32178533 | 503.34989   | Relative      | 1          | 104     | 1:3009:244 | 1             | 3009         |
| 8  | 7        | 30.36473632 | 505.4434078 | Relative      | 1          | 104     | 1:3009:244 | 1             | 3009         |
| 9  | 8        | 30.49501395 | 505.5854509 | Relative      | 1          | 104     | 1:3009:244 | 1             | 3009         |
| 10 | 9        | 38.19651461 | 513.2644661 | Relative      | 1          | 104     | 1:3009:288 | 1             | 3009         |
| 11 | 10       | 38.63683403 | 513.6948852 | Relative      | 1          | 104     | 1:3009:288 | 1             | 3009         |
| 12 | 11       | 48.36644602 | 523.4575326 | Relative      | 1          | 104     | 1:3009:259 | 1             | 3009         |
| 13 | 12       | 48.47135711 | 523.5633356 | Relative      | 1          | 104     | 1:3009:262 | 1             | 3009         |
| 14 | 13       | 51.04540038 | 526.0934718 | Relative      | 1          | 104     | 1:3009:321 | 1             | 3009         |
| 15 | 14       | 51.7157253  | 526.8038264 | Relative      | 1          | 104     | 1:3009:321 | 1             | 3009         |
| 16 | 15       | 52.33607841 | 527.398162  | Relative      | 1          | 104     | 1:3009:261 | 1             | 3009         |
| 17 | 16       | 54.01944625 | 529.0493382 | Relative      | 1          | 104     | 1:3009:259 | 1             | 3009         |
| 18 | 17       | 57.6967212  | 532.7884549 | Relative      | 1          | 104     | 1:3009:260 | 1             | 3009         |
| 19 | 18       | 58.05586541 | 533.096401  | Relative      | 1          | 104     | 1:3009:260 | 1             | 3009         |
| 20 | 19       | 63.01631296 | 538.1087054 | Relative      | 1          | 104     | 1:3009:260 | 1             | 3009         |
| 21 | 20       | 63.72245657 | 538.7721229 | Relative      | 1          | 104     | 1:3009:262 | 1             | 3009         |
| 22 | 21       | 67.81868505 | 542.8861152 | Relative      | 1          | 104     | 1:3009:260 | 1             | 3009         |
| 23 | 22       | 69.21892917 | 544.299408  | Relative      | 1          | 104     | 1:3009:290 | 1             | 3009         |
| 24 | 23       | 69.53838623 | 544.5699474 | Relative      | 1          | 104     | 1:3009:321 | 1             | 3009         |
| 25 | 24       | 72.61590338 | 547.6666298 | Relative      | 1          | 104     | 1:3009:260 | 1             | 3009         |





## 14. Using Logger Commands

The Logger has a set of commands that cover most Logger operations. They are very versatile in that you can use them on the command line, in the text interface, or in the Logger configuration file. This chapter explains how to use the commands in each of these contexts. It also describes each command.

|                                                             |     |
|-------------------------------------------------------------|-----|
| 14.1. Using Logger Commands on the Command Line .....       | 194 |
| 14.2. Using Logger Commands in the Configuration File ..... | 195 |
| 14.3. Using Logger Commands in the Text Interface .....     | 195 |
| 14.3.1 Entering Commands .....                              | 195 |
| 14.3.2 Displaying a List of Commands .....                  | 196 |
| 14.4. Command Descriptions .....                            | 196 |
| 14.4.1 Argument Types .....                                 | 196 |
| 14.4.2 System Domain Commands .....                         | 197 |
| 14.4.3 Player Domain Commands .....                         | 198 |
| 14.4.4 Recorder Domain Commands .....                       | 200 |
| 14.4.5 Simulation Domain Commands .....                     | 202 |
| 14.4.6 Editor Domain Commands .....                         | 212 |
| 14.5. Command List .....                                    | 214 |

## 14.1. Using Logger Commands on the Command Line

When you start the Logger from the Windows or Linux command line, you can use the `-r` command-line option to specify Logger commands. Commands must be surrounded by double quotes. To use double quotes within a command, protect them with a backslash escape character (`\`). Strings in string lists are separated by spaces. Strings cannot contain spaces.

**i** Commands that are specified using `-r` are executed after the Logger connects to the exercise. Therefore, commands that need to execute at connection time, such as `SetConnectionParameters`, do not work from the command line.

If a command has multiple parameters, you must specify values for all of them, even if you only want to set some of them. Also, the parameter names used in the command descriptions are not keywords. They are simply mnemonics. The commands must use the type of value specified, such as a boolean value or an integer. For example, `SetRemoteControlSettings` is described as:

```
SetRemoteControlSettings useSimChannel1(bool) useBackChannel1(bool) record
(bool) allowDelete(bool) allowAll(bool) sendResponses(bool) crippleGui(bool)
useLegacyPdu(bool) connectSendInterval(double) heartbeatSendInterval(double)
```

To use `SetRemoteControlSettings` in a command, you would need to do something like this (for DIS):

```
loggerDIS.exe -r "SetRemoteControlSettings true true true false false
true false true 5.0 5.0"
```

Or this (for HLA):

```
loggerHLA13.exe -r "SetRemoteControlSettings true true true false
false true false true 5.0 5.0"
```

This example starts the Logger and opens the file `../logger_tapes/FollowSuspect-2024-DIS.lgr`. Note the use of the backslash to protect the quoted string within the command. (Quotes are not required unless the path has spaces.)

```
loggerversion -r "OpenFile \"../logger_tapes/FollowSuspect-2024-
DIS.lgr\" 0"
```

**i**

- The `OpenFile` command is unique. If you simply specify a Logger file on the command line, the Logger assumes `-r OpenFile` and opens the file, for example:  

```
loggerversion \"../logger_tapes/FollowSuspect-2024-DIS.lgr\"
```
- If a command specifies the name of a recording and there is a video file with the same name, the video also loads.

This example enables time management and specifies a subscription list:

```
loggerversion -n 3 --federateName logger
-r "SetTimeManagement true true true true 0.1"
-r "SetSubscriptionLists
```

```
\ObjectRoot.BaseEntity.PhysicalEntity.Platform.Aircraft
ObjectRoot.BaseEntity.PhysicalEntity.Radio
InteractionRoot.WeaponFire\""
```

## 14.2. Using Logger Commands in the Configuration File

You can put Logger commands in the Logger configuration file. For complete details, see "5.10. Editing *lgrConfig.xml*" on page 95.

## 14.3. Using Logger Commands in the Text Interface

The Logger text interface lets you enter commands in a console window instead of, or in addition to, using the graphical user interface.

- To start the Logger with the console enabled, in the appropriate *lgrConfig.xml* file, set the value of the `showConsole` variable to `true`.

```
<var name="showConsole" type="bool" value="true" />
```

or start the Logger with the `-c` command-line option:

```
loggerversion (-c | --showConsole) 1
```

If you want, you can disable the GUI. For details, see "6.1.3 Running the Logger without a GUI" on page 104.

### 14.3.1 Entering Commands

The text interface has commands for most Logger functions. Most commands consist of a command and one or more arguments, for example:

```
openFile ../logger_tapes/test.lgr 0
```

Commands must include all arguments and the arguments must be typed in the correct order. (For command descriptions, see "14.4. Command Descriptions" on the next page.) For example, in the `SetTimeManagement` command, you must include values for each time management mode, even if you only want to use one of them:

```
SetTimeManagement true true true true 0.1
```

String list parameters are encoded as quoted strings separated by spaces. Strings in a string list may not have spaces, for example:

```
SetSubscriptionLists
"ObjectRoot.BaseEntity.PhysicalEntity.Platform.Aircraft"
"ObjectRoot.BaseEntity.PhysicalEntity.Radio"
"InteractionRoot.WeaponFire"
```

You can manipulate the command line:

- To execute a command, press **Enter**.
- To reset a command entry, press **Esc**.

- ▶ To execute a previously executed command, press the **Up Arrow** key until the command is displayed. Then, press **Enter**.
- ▶ If you have displayed a previous command by pressing **Up Arrow**, press **Down Arrow** to move back down the command list.

### 14.3.2 Displaying a List of Commands

You can display a list of commands. They are displayed in the format:

```
command_name argument_1_name(argument_type) argument_2_name(argument_type) ...
```

- ▶ To display the list of available commands, type `help` in the console window and then press **Enter**.

## 14.4. Command Descriptions

Commands are organized into domains. If you add a command to *lgrConfig.xml*, you must specify its domain. The domains are:

- System
- Player
- Recorder
- Editor
- Simulation
- Invalid

When used in the configuration file, simulation domain commands require a protocol string. The valid protocol strings are:

- None
- DIS
- HLA 13
- HLA 1516
- HLA 1516e

### 14.4.1 Argument Types

Many commands have arguments. The data you enter for arguments must be of the correct type. For example, if an argument takes an int (integer), the value 5 is acceptable, but 5.0 is not. In the command descriptions, command argument types are shown in parentheses following each argument. Table 38 describes the argument types used for commands.

Table 38. Argument types

Argument Type	Description
int	32-bit signed integer. For example: <code>SetNotifyLevel 2</code>
int64	64-bit signed integer. For example: <code>SetStepSize 1000000</code>
double	64-bit floating point number. For example: <code>SetTimeoutRate 5.0</code>
stringlist	A series of strings, separated by spaces. The individual strings cannot have spaces. The entire series is surrounded by double quotes. For example: <code>"string1 string2 string3"</code>
string	A string of alphanumeric characters.
time	Time values can be entered as a double (in seconds) or in Hour:Minute:Second:Fractions of a second format.
base64	Binary data encoded as a base 64 string.
bool	Boolean value. Can be true, false, 1 (true), or 0 (false).

### 14.4.2 System Domain Commands

Table 39 describes the commands in the System domain.

Table 39. System domain commands

Command	Description
<code>DeleteFile filename(string)</code>	Deletes the specified file. This command is considered dangerous and should only be used with caution.
<code>Exit</code>	Shuts down the Logger.
<code>Help</code>	Displays a list of available commands.
<code>LoadPlugin pluginName (string)</code>	Loads the specified plug-in.
<code>SetDefaultTapeDirectory defaultTapeDir(string)</code>	Sets the directory where the Logger creates and loads files.
<code>SetEntityTracking entityTracking(bool)</code>	Allows entity tracking to be processed. Enabled by default. When disabled, entity tracking is not allowed to be processed and the entity filter is empty.
<code>SetFastJumpsWithoutDiff fastJumpsWithoutDiff(bool)</code>	When jumping, checkpoints are used to establish the relative state of objects, but the packets between the checkpoint and jump time are not processed.
<code>SetGuiConfigFilename filename(string)</code>	Specifies the name of the GUI layout configuration file. Default: <i>logger-gui.conf</i> .

**Table 39. System domain commands (continued)**

Command	Description
<code>SetNotifyLevel vLevel(int) lgrLevel(int)</code>	Sets the notification level of VR-Link and the Logger.
<code>SetPlaybackReadTimeLimit playbackReadTimeLimit (double)</code>	When greater than 0.0, this command sets a limit on how long the Logger can spend reading packets from the Logger file during playback, after which the remaining packets up to the current time will be dropped. Values are 0–4, where 4 is the most verbose.
<code>SetTempDir directory(string)</code>	Sets the directory in which the Logger stores temporary Logger files when recording and editing. By default, the Logger uses the current user's <i>temp</i> directory (OS specific). If you specify a temporary directory, it is best to use a local directory for performance reasons. To reset the temp directory to the system directory use an empty string. The Logger deletes the temporary files when they are no longer needed.

### 14.4.3 Player Domain Commands

Table 40 describes the commands in the Player domain.

**Table 40. Player domain commands**

Command	Description
<code>ClosePlaybackFile</code>	Closes the current playback file.
<code>OpenFile filename(string) constructFilename(bool)</code>	Opens the specified file for playback or constructs a file name using the specified file name and remote control ID. If the filename has spaces, you must enclose it in quotes, which in turn must be protected with backslashes on the command line. For more information, please see File Naming Conventions in the developer guide section of the API documentation.
<code>Pause</code>	Pauses playback. This command has no effect if the Logger does not have a file open or is already paused.
<code>Play</code>	Starts playback. If the Logger is already playing, this command has no effect.
<code>PlayPause</code>	Toggles between the paused and play state. If the Logger is stopped, it starts playback.
<code>Restart</code>	Starts playing from the beginning of the file.

Table 40. Player domain commands (continued)

Command	Description
RevertFile	Reverts a previously saved but currently unsaved file to the previously saved state. All changes since the last save are lost. This command applies only to files that you open for playback or editing.
SaveFile <i>reopenAfterSave</i> (bool)	Saves a previously saved, but currently unsaved, file to its current file name. The previous file is backed up to a file named <i>filename.bak.lgr</i> , for example: <i>test.lgr</i> would be saved to <i>test.bak.lgr</i> . The current file contains the latest changes. Saving the file closes it. The <i>reopenAfterSave</i> boolean specifies whether the saved file should be reopened after the save.
SaveFileAs <i>filename</i> (string) [ <i>description</i> (string) <i>writeDescription</i> (bool) <i>reopenAfterSave</i> (bool)]	Saves the current file to a new file. Saving the file closes it. The <i>reopenAfterSave</i> boolean specifies if the saved file should be reopened after the save. Optionally, add a description.
SetBackupOnSave <i>backup</i> (bool)	Enables or disables automatic backup when you save a previously saved file.
SetCurrentTime <i>time</i> (time)	Moves the timeline cursor to the specified time.
SetFollowingInterval <i>interval</i>	Specifies the default length of the zoom timeline, in seconds.
SetFollowingExportInterval <i>interval</i>	Specifies the frequency at which to export timeline data when playing Logger data from an active recording. This also specifies the length, in seconds, of the data recording.
SetLoopAtEnd <i>value</i> (bool)	Enables or disables looping to start at the end of playback.
SetPacketViewInterval <i>interval</i> (double)	Specifies the interval between tick marks in the Packet Count View and Packet Size View.
SetPlaybackSpeed <i>speed</i> (double) <i>skippingPlayback</i> (bool)	Sets the playback speed of the Logger. If <i>skippingPlayback</i> is True, skip from checkpoint to checkpoint without sending the interim state updates.
SetPlayOnLoad <i>value</i> (bool)	Enables starting playback immediately after opening a file.
SetSkippingPlaybackThreshold <i>skippingPlaybackThreshold</i> (double)	Set the playback speed above which skipping playback mode is used automatically.

**Table 40. Player domain commands (continued)**

Command	Description
<code>SetStartStopTimes</code> <i>startTime</i> (time) <i>stopTime</i> (time)	Sets the start and stop time of the Logger. The two times are bound to the first and last times in the file. The stop time must be after the start time.
<code>SkipTime</code> <i>time</i> (double) <i>forward</i> (bool)	Moves the timeline cursor the specified time (forward or backward) relative to the current time.
<code>StopPlayback</code>	Stops playback. This command has no effect if the Logger is not in the playback state.
<code>Unpause</code>	Unpauses the Logger. This command has no effect if the Logger is not paused.

### 14.4.4 Recorder Domain Commands

Table 41 describes the commands in the Recorder domain.

**Table 41. Recorder domain commands**

Command	Description
<code>CancelRecording</code>	Cancels the current recording. The Logger must be currently recording. After the command is executed, the Logger is in an empty state; no file loads.
<code>CloseRecordFile</code>	Closes the file currently recording.
<code>NewFile</code> <i>filename</i> (string) <i>description</i> (string) <i>constructFilePathAndName</i> (bool) <i>overwrite</i> (bool)	Opens a new file with the given name and description for recording. The file name is used as given or it is constructed using the specified file name and remote control ID. The description must be enclosed in backslashed quotes if it contains spaces.
<code>PauseRecording</code>	Pauses the recording process. Recording stops, but the data is not saved and the Logger remains in record mode. No data is recorded while the Logger is paused. You can resume recording to the same file.
<code>Record</code>	Starts recording a file that is already loaded. To open a new file and start recording, use <code>newFile</code> .
<code>RecordToMultipleFiles</code> <i>fileName</i> (string)	Starts recording to new files.

Table 41. Recorder domain commands (continued)

Command	Description
SetCheckpointParameters <i>policy</i> (int) <i>size</i> (int) <i>count</i> (int) <i>time</i> (time)	Sets the checkpoint policy parameters on when checkpoints are generated. The Policy is one of:       • 0 - count, in number of packets.     • 1 - size of packets, in bytes.     • 2 - time, in seconds between checkpoints.         You must specify a value for each argument on the command line. The value does not need to be meaningful for the policies that are not being used.
SetPauseOnRecordAs <i>record</i> (bool)	Determines how the Logger behaves when given the Record As command. If <code>true</code> , the Logger pauses and does not begin recording until it is given the Record command. If <code>false</code> , the Logger begins recording as soon as a file name is specified.
SetRecordToMultipleFilesSettings <i>duration</i> (double) <i>namingConvention</i> (string)	Set the multiple file recording parameters.
SetStopCondition <i>condition</i> (int) <i>close</i> (bool)	Specifies the stop condition for recording:       • 0 - no condition.     • 1- duration (enables SetStopDuration).     • 2 - filesize (enables SetStopSize).       If the <i>close</i> parameter is <code>true</code>, the file closes when recording stops.
SetStopDuration <i>duration</i> (time)	Stops recording at the specified time if SetStopCondition is set to 1.
SetStopSize <i>filesize</i> (int64)	Stops recording when the file reaches <i>filesize</i> size if SetStopCondition is set to 2.

**Table 41. Recorder domain commands (continued)**

Command	Description
StopRecording <i>closeAndOpenForPlayback</i> (bool)	Stops recording and ends. By default <i>closeAndOpenForPlayback</i> is true (1). If you set <i>closeAndOpenForPlayback</i> to false (0), then after you issue StopRecording, you are still in record mode. You would need to issue the CloseRecordFile command to close the file and exit record mode.
UnpauseRecording	Resume a paused recording.

### 14.4.5 Simulation Domain Commands

14.4.5 describes the commands in the Simulation domain. Examples of using the SetConnectionParameters command are in the protocol-specific configuration files. For a full definition of the arguments, see "Chapter 5. Configuring the Logger" on page 77.

**Table 42. Simulation domain command**

Command	Description
<b>Protocol-independent Commands</b>	
Connect	Connects to the network simulation using the previously set parameters.
Disconnect	Disconnects from the network simulation.
FilterEntityTypes <i>entityType1 ... entityTypeN</i> (string)	Specifies a list of entity types to list in the Filter by Entity Type dialog box and enables filtering for these entity types.
SetBackChannelConnection <i>address</i> (string) <i>port</i> (int) <i>interface</i> (string)	Set the parameters for the back channel connection configuration.
SetCommonEntityTypes <i>entityType1 ... entityTypeN</i> (string)	Specifies a list of entity types to list in the Filter by Entity Type dialog box. Does not enable filtering of these entity types.
SetListenWhenIdle <i>state</i> (bool)	Enables or disables listening to the network when the Logger is neither recording or playing a file.
SetRemoteControlId <i>remoteControlId</i> (integer)	Specifies the Logger's remote control ID. By default the value is assigned the Logger's site ID. This value is used if SetRemoteControlSettings allowAllRemoteControl is disabled.

Table 42. Simulation domain command (continued)

Command	Description
<b>SetRemoteControlSettings</b> <i>useSimChannel</i> (bool) <i>useBackChannel</i> (bool) <i>record</i> (bool) <i>allowDelete</i> (bool) <i>allowAll</i> (bool) <i>sendResponses</i> (bool) <i>crippleGui</i> (bool) <i>useLegacyPdu</i> (bool) <i>connectSendInterval</i> (double) <i>heartbeatSendInterval</i> (double)	Specifies how the Logger responds to Logger Control messages.       • <i>useSimChannel</i> determines whether the Logger responds to Logger control messages from the exercise connection.     • <i>useBackChannel</i> determines whether the Logger responds to Logger control messages from the Remote Control Logger.     • <i>record</i> determines whether Logger control messages are included in the file.     • <i>allowDelete</i> determines whether to respond to the delete file Logger control message.     • <i>allowAll</i> determines whether remote control PDUs are filtered based on the Logger's site-application-entityNum triplet, where the Logger's remote control ID is used for the entityNum. By default, this parameter is enabled and all remote control PDUs are accepted. When disabled, the Logger accepts remote control PDUs when the receiver ID matches the Logger. The receiver ID can have wildcard values (0xFFFF or unsigned int = 65535) in any of the triplet values (for example, 1:1:65535 matches any Logger with site = 1 and application ID = 1). Remote control PDUs are filtered when they do not match. By default, the Logger's remote control ID equals its site ID. The remote control ID can be changed using the SetRemoteControlId command.     • <i>sendResponses</i> specifies whether the Logger sends the internal responses over the network for the remote control interface. The responses are generated by the Logger to provide feedback on the changes in state of the Logger based on the execution of commands (for example, fileOpened, playback paused, and so on).     • <i>crippleGui</i> disables some features in the

Table 42. Simulation domain command (continued)

Command	Description
	GUI and causes it to start minimized. It forces the data views to not be visible at startup and also disables mouse clicks in the timeline (that is, you cannot jump via mouse clicks). It also disables error messages.       • <i>useLegacyPdu</i> If set to 0, use Logger Control Toolkit PDUs and interactions from the Logger Control API introduced in Logger 5.1. If set to 1, use PDUs and interactions from the Logger Control Toolkit API in Logger 5.0 and earlier. The Logger can only use one API at a time.     • <i>connectSendInterval</i> specifies how frequently, in seconds, to send connect messages. The connect message is used by a remote control interface to discover Loggers. Once the Logger is connected, it stops sending the connect message and start sending a heartbeat message. If the <i>connectSendInterval</i> is less equal 0, then the connect message is not sent.     • <i>heartbeatSendInterval</i> specifies how frequently, in seconds, to send a heartbeat message after the Logger connects. The heartbeat message is used by a remote control interface to determine whether the Logger is no longer responsive (for example, crashed or broken network connection). If the <i>heartbeatSendInterval</i> is less than 0, then the heartbeat message is not sent.
<i>SetSaveConnectionConfiguration</i> <i>saveConnectionConfiguration</i> (bool)	Enables or disables saving of connection information to the <i>lgrConfig.xml</i> file.
<i>setScaleAttributes</i> <i>scale</i> (bool)	Enables or disables attribute scaling due to changes in playback speed. When enabled, attributes (such as velocity and acceleration) are scaled to synchronize with playback speed changes. When disabled, no scaling occurs.

Table 42. Simulation domain command (continued)

Command	Description
<code>setSendOnlyUpdatedValues state</code> (bool)	If true, when the Logger receives attribute value update requests, only send updates for values that have been updated in the Logger file. Do not send default values.
<code>setVRFFiltering filter</code> (bool) <code>loId</code> (int) <code>hiId</code> (int)	Configures VR-Forces message filtering. The <code>filter</code> argument enables or disables filtering of VR-Forces messages. The <code>loId</code> argument specifies the lowest message ID to filter out. The <code>hiId</code> argument specifies the highest message ID to filter out.
<b>HLA-specific Commands</b>	
<code>CommonObjectNames objectName1 ...</code> <code>objectNameN</code> (string)	Specifies a list of object names to list in the Filter by Object Names dialog box. Does not enable filtering of these object names.
<code>EnableRequestUpdates state</code> (bool)	Enable or disable whether request updates is invoked when an object is discovered. Default: true.
<code>FilterObjectNames objectName1 ...</code> <code>objectNameN</code> (string)	Specifies a list of object names to list in the Filter by Object Names dialog box and enables filtering for these entity object names.
<code>LoadSubscriptionListFile</code> <code>filename</code> (string)	Loads a subscription list file. The subscription list file is an XML file that you create using the Logger GUI. The Logger must be connected. The subscription settings are loaded from the file.
<code>SaveSubscriptionListFile</code> <code>filename</code> (string)	Saves the subscription settings to an XML file with the specified name. In the GUI, the extension <code>.subx</code> is added to filenames, but it is not added to the filename when saved from the command line.

Table 42. Simulation domain command (continued)

Command	Description
SetConnectionParametersHLA <i>federateName</i> (string) <i>federationName</i> (string) <i>fedFile</i> (string) <i>ignoreAdvisories</i> (bool) <i>fomVersion</i> (double) <i>fomRevision</i> (int) <i>useMatrexFomMapper</i> (bool) <i>matrexFomMapperData</i> (string) <i>fomMapper</i> (string) <i>fomMapperData</i> (base64) <i>useEmptyFomMapper</i> (bool) <i>noRtiCompilerCheck</i> (bool) SetConnectionParametersHLAe <i>federateName</i> (string) <i>federateType</i> (string) <i>federationName</i> (string) <i>fedFile</i> (string) <i>fomModules</i> (string) <i>MIM</i> (string) <i>ignoreAdvisories</i> (bool) <i>fomVersion</i> (double) <i>fomRevision</i> (int) <i>useMatrexFomMapper</i> (bool) <i>matrexFomMapperData</i> (string) <i>fomMapper</i> (string) <i>fomMapperData</i> (base64) <i>useEmptyFomMapper</i> (bool) <i>noRtiCompilerCheck</i> (bool)	Specifies HLA (1.3 and 1516) or HLA Evolved connection parameters:      • <i>federateName</i>. The name of the Logger federate. (HLA Evolved only)     • <i>federateType</i>. The type of the Logger federate.     • <i>federationName</i>. The name of the federation execution.     • <i>fedFile</i>. The name of the FED file (or FDD or XML file).     • <i>fomModules</i>. One or more FOM module files. (HLA Evolved only)     • <i>MIM</i>. A MIM file in the <i>./bin64</i> folder. (HLA Evolved only)     • <i>ignoreAdvisories</i>. Configures the Logger to ignore RTI advisory queues and always send data. Default: false.     • <i>fomVersion</i>. The RPR FOM version to use.     • <i>fomRevision</i>. The RPR FOM revision to use.     • <i>useMatrexFomMapper</i>. Tells the Logger whether to use the appropriate Matrex FOM Mapper. (Versions for HLA 1.3, HLA 1516, and HLA Evolved are in the Logger's <i>./bin64</i> folder. Default: false.     • <i>matrexFomMapperData</i>. Initialization data for the Matrex FOM Mapper — version=1.0, for example.     • <i>fomMapper</i>. The name of the FOM Mapper to use, if any.     • <i>fomMapperData</i>. Initialization data for the FOM Mapper.     • <i>useEmptyFomMapper</i>. The Logger uses an empty FOM Mapper, allowing it to record and play back using any FOM. The empty FOM Mapper does not support some playback features such as pause or scaling, which require the Logger to use

Table 42. Simulation domain command (continued)

Command	Description
	dead reckoning to generate intermediate updates.
	• <i>noRtiCompilerCheck</i>. Controls whether the Logger checks the compiler version of the RTI libraries on initialization. The Logger exits if it finds mismatched versions. Set to <code>true</code> to skip the compiler check. Default: <code>false</code>.

Table 42. Simulation domain command (continued)

Command	Description
SetDdmParameters <i>enableDdm</i> (bool) <i>playbackMode</i> (string) <i>subscribeMode</i> (string) <i>playbackDynamicAssociation</i> (bool) <i>playbackDynamicExtents</i> (bool) <i>allowPlaybackWithoutRegions</i> (bool) <i>recordConveyedRegions</i> (bool) <i>requestUpdates</i> (bool) <i>subscribeUnspecifiedAttributes</i> (bool)	Specifies DDM parameters:      • <i>enableDdm</i>. Enable record and playback using DDM. Default: false.     • <i>playbackMode</i>. Supported modes are:                    — <b>PlaybackRegionsUseConveyedExtents</b>. During playback, regions are created and updated using recorded region data.     — <b>PlaybackRegionsUseData</b>. Regions are created and updated by inspecting simulation data. Requires plug-in extension.     — <b>PlaybackRegionNotEnabled</b> (default). Updates and interactions are sent without regions.           • <i>subscribeMode</i>. Supported modes:                    — <b>SubscribeRegionsAreGlobal</b>. DDM subscriptions are made with global regions with extents of global min and max.     — <b>SubscribeRegionsAreSpecified</b>. The regions are specified through subscription configuration files. (For details, please see the <code>LoadSubscriptionListFile</code> command.) The subscription region configuration can also be specified programmatically through the Logger plug-in API.     — <b>SubscribeRegionNotEnabled</b> (default). Subscriptions are performed without regions.           • <i>playbackDynamicAssociation</i>. During playback, the association of regions with object instance attributes can be fixed or dynamic. If it is known that region associations with attribute instances never change, the overhead of checking for changes can be eliminated. This parameter should be disabled if possible. Default: false.

Table 42. Simulation domain command (continued)

Command	Description
	• <i>playbackDynamicExtents</i>. During playback, the region extents can be fixed or dynamic. The conventional notion of DDM regions regards them as dynamically changing extents to reflect the state of simulation data (for example, surrounding an entity's position). An alternative approach is for the regions to be fixed and the object attribute instances move from region to region. If it is known that region extents never change, the overhead of checking for changes can be eliminated. This parameter should be disabled if possible. Default: false.     • <i>allowPlaybackWithoutRegions</i>. During playback, it may happen that a region association cannot be established. In these cases, the Logger sends the data without region association. Disable this parameter if the federation agreement requires that all data must be transmitted with associated regions. Default: true.     • <i>recordConveyedRegions</i>. Enable this parameter to record conveyed regions. Default: true.     • <i>requestUpdates</i>. Requesting updates can result in spikes in network traffic, especially since it is often performed by late-joining federates when the exercise is already populated with many objects. In some DDM federations, object heartbeats are used instead of update requests. Disable this parameter to prevent the Logger from making requests for updates.     • <i>subscribeUnspecifiedAttributes</i>. The Logger may not be able to determine a region association to apply to an interaction class or object class attribute subscription. This situation may occur if the interaction or class does not specify a routing space or dimension in the FOM. It can also happen if the <i>subscribeMode</i> is

Table 42. Simulation domain command (continued)

Command	Description
	configured as <code>SubscribeRegionsAreSpecified</code> , but some classes or attributes are left unspecified. By default, the Logger subscribes to these interaction classes and object class attributes without using a region association (in effect a global subscription). Disable this parameter if the Logger should only subscribe when a region association can be used. Default: true.
<code>SetDisableTimeManagementTest</code> <i>disableTesting</i> (bool)	Disables testing for time management if that test causes the Logger to behave badly. Ordinarily, when time management is enabled, when the Logger connects, it tries to become a time-constrained federate to see if time management is enabled in the RTI. If it succeeds, the Logger sets time management settings as configured. In some cases, this test causes the Logger to hang. If this problem occurs, setting <i>disableTesting</i> to true turns off the test. However, time management is disabled.
<code>SetDrainInput</code> <i>maxTime</i> (double), <i>minTime</i> (double)	Specifies the minimum and maximum amount of time, in seconds, to spend reading messages from the exercise connection (that is, the network) each tick.
<code>SetDynamicNamePrefix</code> <i>prefix</i> (string)	Specifies the prefix that the Logger attaches to the beginning of object names that begin with HLA_ when it is recording exercises.
<code>SetHeartbeatIntervals</code> " <i>className</i> (string): <i>interval</i> (float): <i>inheritable</i> (bool) ..."	Specifies a heartbeat interval for playback. You can specify multiple classes. For details, see "5.3.4 Configuring HLA Heartbeating" on page 82.
<code>SetIgnoreAdvisories</code> <i>mode</i> (bool)	Specifies the Logger's response to HLA advisory messages. You must specify this command before the Connect command. Default: false.
<code>SetPassiveSubscription</code> <i>mode</i> (bool)	Configures passive subscription for HLA. You must specify this command before the Connect command. Default: false.

Table 42. Simulation domain command (continued)

Command	Description
SetSubscriptionLists <i>objectClasses</i> (stringList) <i>interactionClasses</i> (stringList)	Sets the class subscription list. To subscribe to a class, the class must be in the list. Each class must be specified using the full HLA class name (including parents). Some operating systems will not allow command line buffers that are long enough to allow use of this command on the command line. The Logger must be connected. The updated subscription list takes effect the next time you record.
SetTimeManagement <i>timeConstrainedRecording</i> (bool) <i>timeConstrainedPlayback</i> (bool) <i>timeRegulatingRecording</i> (bool) <i>timeRegulatingPlayback</i> (bool) <i>lookahead</i> (double)	Configures time management options. The <i>timeConstrainedPlayback</i> and <i>timeRegulatingRecording</i> arguments must be included on the command line, but are not supported and are ignored.
SetTimeoutIntervals " <i>className</i> (string): <i>interval</i> (float): <i>inheritable</i> (bool) ..."	Specifies an object timeout for recording. You can specify multiple classes. For details, see "5.3.5 Configuring HLA Timeouts" on page 83.
<b>DIS-specific Commands</b>	
AddCustomPDU <i>pduName</i> (string) <i>pduKind</i> (string) <i>entityIdOffset</i> (string) <i>entityTypeOffset</i> (string)	Specifies a PDU to add to the Filter by PDU Kind dialog box.
CommonEntityIds <i>id1</i> ... <i>idN</i> (string)	Specifies a list of entity IDs to list in the Filter by Entity IDs dialog box. Does not enable filtering of these entity IDs.
FilterEntityIds <i>id1</i> ... <i>idN</i> (string)	Specifies a list of entity IDs to list in the Filter by Entity IDs dialog box and enables filtering for these entity IDs.

Table 42. Simulation domain command (continued)

Command	Description
SetConnectionParametersDIS <i>port</i> (int) <i>exerciseId</i> (int) <i>siteId</i> (int) <i>appNumber</i> (int) <i>useAsynchIO</i> (bool) <i>sendBufferSize</i> (int) <i>recvBufferSize</i> (int) <i>multicastTtl</i> (int) <i>destAddr</i> (string) <i>subnetMask</i> (string) <i>deviceAddr</i> (string) <i>mcastAddresses</i> (stringList)	Specifies parameters for the DIS exercise connection:      • <i>port</i>. The port to listen to.     • <i>exerciseId</i>. The Logger's exercise ID.     • <i>siteId</i>. The Logger's site ID.     • <i>appNumber</i>. The Logger's application number.     • <i>useAsynchIO</i>. Enable (1) or disable (0) asynchronous I/O.     • <i>sendBufferSize</i>. The size of the send buffer.     • <i>recvBufferSize</i>. The size of the receive buffer.     • <i>multicastTtl</i>. The multicast time-to-live, in seconds.     • <i>destAddr</i>. The destination address to send to.     • <i>subnetMask</i>. The subnet mask used for determining the destination when <i>destAddr</i> is not unspecified.     • <i>deviceAddr</i>. The network interface address to use.     • <i>mcastAddresses</i>. A list of multicast addresses, separated by spaces.
SetDrainInput <i>maxTime</i> (double), <i>numPdusToRead</i> (int)	Specifies the maximum amount of time, in seconds, to spend reading messages from the exercise connection (that is, the network) and the number of PDUs to read between each check of the maximum time.
SetHeartbeatRate <i>rate</i> (double)	Specifies the DIS heartbeat rate.
SetTimeoutRate <i>rate</i> (double)	Specifies the DIS timeout rate.

### 14.4.6 Editor Domain Commands

Table 43 describes the commands in the Editor domain.

 Editing operations can be performed only on files that have been opened for playback. After you perform an edit, the edited file is unsaved. You must save it to preserve the change.

Table 43. Editor domain command

Command	Description
AppendFileToEnd <i>filename</i> (string)	Appends the file <i>filename</i> to the end of the open file.
ClearSection <i>start</i> (time) <i>end</i> (time)	Removes all packets between the <i>start</i> and <i>end</i> times in a file.
ConvertFile	Converts the current file to the latest file format. This command is not valid for files that are already in the latest file format.
CutSection <i>start</i> (time) <i>end</i> (time)	Removes all packets between the <i>start</i> and <i>end</i> times in a file. All packets after the <i>end</i> time are offset so that the first packet after the <i>end</i> time is now at the <i>start</i> time.
ExportFile <i>exportFormat</i> (string) <i>destination</i> (string) <i>checkpoint</i> (bool) <i>openAfterExport</i> (bool)	Exports a file using a given <i>exportFormat</i> to a <i>destination</i>. The last two parameters are only used when exporting a Logger file. The Logger tries to export using the <i>exportFormat</i> and the <i>destination</i>. If <i>checkpoint</i> is true and the file is a Logger file, new checkpoints are generated for the output.   If <i>openAfterExport</i> is true and the file is a Logger file, the Logger closes the current file and tries to open the new file.   The valid <i>exportFormat</i> strings are based upon the registered export objects. The valid strings are identical to the Export and Export Selection menu commands in the GUI. The formats supplied with the Logger are Plain Text (if the lgrDump plug-in is loaded) and Logger File (export to a Logger file).   The <i>destination</i> typically is a filename (although that is not required) and is specific to the <i>exportFormat</i>. The Plain Text exporter exports to any filename, but is typically exported to a <i>.txt</i> file. The Logger File exporter exports to a <i>.lgr</i> file and adds that extension if it is not in the <i>destination</i> string. Other exporters may encode the <i>destination</i> differently.
ExportSection <i>exportFormat</i> (string) <i>destination</i> (string) <i>start</i> (time) <i>end</i> (time) <i>offset</i> (double) <i>checkpoint</i> (bool) <i>openAfterExport</i> (bool)	Exports a section of a file using a given <i>exportFormat</i> to a <i>destination</i> . This command works just like the ExportFile command except that it exports a segment of a file rather than the entire file.
MergeInFile <i>filename</i> (string) <i>offset</i> (double)	Merges the Logger file <i>filename</i> into the open file. An optional offset is applied to all packets from the file before being combined with the current data.

**Table 43. Editor domain command (continued)**

Command	Description
<code>offsetTime</code> <i>offset</i> (double)	Offsets the time of the packets in the open file by the <i>offset</i> value. The <i>offset</i> value can be positive or negative. However, if you specify a negative offset, any data that results with a time less than zero is lost.
<code>PrefixFileToStart</code> <i>filename</i> (string)	Inserts the file named <i>filename</i> at the start of the open file.
<code>TrimStart</code>	Removes any dead time from the start of the file and offsets all packets so that the first packet timestamp is 0.0.

## 14.5. Command List

Table 44 section lists all Logger commands and their domain:

**Table 44. Logger commands**

Command	Domain
<code>AddCustomPDU</code>	Simulation
<code>AppendFileToEnd</code>	Editor
<code>CancelRecording</code>	Recorder
<code>ClearSection</code>	Editor
<code>ClosePlaybackFile</code>	Player
<code>CloseRecordFile</code>	Recorder
<code>CommonEntityIds</code>	Simulation
<code>CommonObjectNames</code>	Simulation
<code>Connect</code>	Simulation
<code>ConvertFile</code>	Editor
<code>DeleteFile</code>	System
<code>Disconnect</code>	Simulation
<code>EnableRequestUpdates</code>	Simulation
<code>ExportFile</code>	Editor
<code>ExportSection</code>	Editor
<code>Exit</code>	System
<code>FilterEntityTypes</code>	Simulation
<code>FilterObjectNames</code>	Simulation
<code>Help</code>	System
<code>LoadPlugin</code>	System
<code>LoadSubscriptionListFile</code>	Simulation

**Table 44. Logger commands (continued)**

<b>Command</b>	<b>Domain</b>
MergeInFile	Editor
NewFile	Recorder
OffsetTime	Editor
OpenFile	Player
Pause	Player
PauseRecording	Recorder
Play	Player
PlayPause	Player
PrefixFileToStart	Editor
Record	Recorder
RecordToMultipleFiles	Recorder
Restart	Player
RevertFile	Player
SaveFile	Player
SaveFileAs	Player
SetBackChannelConnection	Simulation
SaveSubscriptionListFile	Simulation
SetBackupOnSave	Player
SetCheckpointParameters	Recorder
SetCommonEntityTypes	Simulation
SetConnectionParametersDIS	Simulation
SetConnectionParametersHLA	Simulation
SetConnectionParametersHLAe	Simulation
SetCurrentTime	Player
SetDdmParameters	Simulation
SetDefaultTapeDirectory	System
SetDisableTimeManagementTest	Simulation
SetDrainInput	Simulation
SetDynamicNamePrefix	Simulation
SetEntityTracking	System
SetFastJumpsWithoutDiff	System
SetFollowingInterval	Player
SetFollowingExportInterval	Player

**Table 44. Logger commands (continued)**

<b>Command</b>	<b>Domain</b>
SetGuiConfigFilename	System
SetHeartbeatRate	Simulation
SetIgnoreAdvisories	Simulation
SetListenWhenIdle	Simulation
SetLoopAtEnd	Player
SetNotifyLevel	System
SetPacketViewInterval	Player
SetPassiveSubscription	Simulation
SetPauseOnRecordAs	Recorder
SetPlaybackReadTimeLimit	System
SetPlaybackSpeed	Player
SetPlayOnLoad	Player
SetRecordToMultipleFilesSettings	Recorder
SetRemoteControlId	Simulation
SetRemoteControlSettings	Simulation
SetSaveConnectionConfiguration	Simulation
SetScaleAttributes	Simulation
SetSendOnlyUpdatedValues	Simulation
SetSkippingPlaybackThreshold	Player
SetStartStopTimes	Player
SetStopCondition	Recorder
SetStopDuration	Recorder
SetStopSize	Recorder
SetSubscriptionLists	Simulation
SetTempDir	System
SetTimeoutRate	Simulation
SetVRFFiltering	Simulation
SkipTime	Player
StopPlayback	Player
StopRecording	Recorder
TrimStart	Editor
Unpause	Player
UnpauseRecording	Recorder



## 15. Using the Logger Remote Control

This chapter explains the purpose of the Logger Remote Control, how to configure it, and how to use it to record and play back simulation data.

15.1. The Logger Remote Control .....	218
15.2. Configuring Loggers to be Controlled Remotely .....	218
15.3. Starting the Logger Remote Control .....	218
15.4. Recording Exercises with the Logger Remote Control .....	219
15.5. Playing Exercises with the Logger Remote Control .....	220
15.6. Configuring the Logger Remote Control Connection .....	221
15.7. Specifying the Refresh Rate .....	222
15.8. Setting the Timebar Color .....	222
15.9. Exiting the Logger Remote Control and Connected Loggers .....	223
15.10. Logger Remote Control Command-line Options .....	223

## 15.1. The Logger Remote Control

The Logger Remote Control allows you to control one or more Loggers from one location. You can record data and play it back from the Logger Remote Control. If you run more than one remote Logger, you cannot control them independently of each other. The commands affect all of them at the same time.

The primary use for the Logger Remote Control is to provide one point of control when you use multiple Loggers to record a large exercise. To improve performance and keep Logger files at reasonable sizes, Logger users often use multiple Loggers, each of which uses the Logger's filtering feature to record a portion of the network traffic. The main problem with this approach is getting the various Loggers to start and stop recording and playback at the same time. The Logger Remote Control solves this problem.

The Logger Remote Control is a separate program: `./bin64/lgrControlGui`. It is protocol-independent. It can control DIS Loggers, HLA Loggers, or both.

## 15.2. Configuring Loggers to be Controlled Remotely

By default, Loggers are configured to be controlled using the Logger Remote Control. It can accept remote control messages from the exercise connection (`useSimChannel`) and from the back channel (`useBackChannel`). You can configure it to accept remote control messages from both sources, only one of them, or neither of them.

To enable remote control, set these variables to true:

```
<var name="useSimChannel" type="bool" value="true"/>
<var name="useBackChannel" type="bool" value="true"/>
```

Each Logger must have a unique remote control ID, which is specified as:

```
<var name="remoteControlId" type="int" value="2"/>
```

The Logger Remote Control controls Loggers whose back channel port matches its connection port. The default back channel port is 4053. To change the port, edit the `backChannelPort` variable in the Logger configuration file:


```
<var name="backChannelPort" type="int" value="4053"/>
```

**i** A Logger's DIS port (`disPort` variable) is completely separate from the back channel port. You can have multiple Loggers using different DIS ports and running in different DIS exercises. When remote control is enabled, they will all be controlled by the same Logger Remote Control unless you specify a different port for the Logger Remote Control and a matching back channel port for the Loggers it is supposed to control.

## 15.3. Starting the Logger Remote Control

- To start the Logger Remote Control on Windows, on the Start Menu, choose **MAK Technologies > Logger Remote Control**. The Logger Remote Control opens (Figure 80).

Figure 80. Logger Remote Control

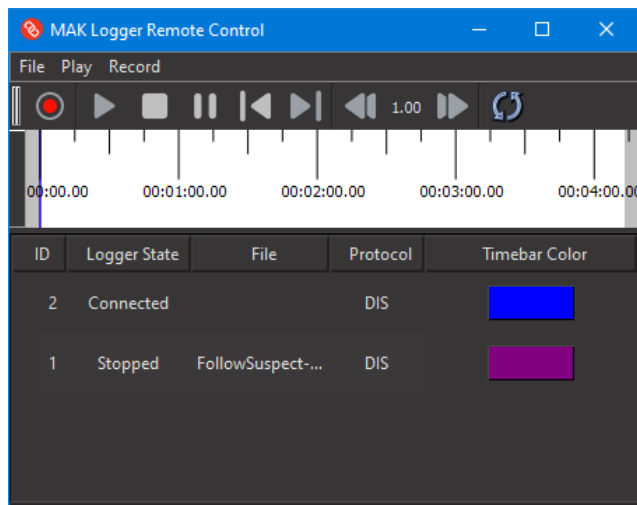

► To start the remote Logger GUI on Linux or from the Windows command line:

1. Change directory to `./bin64`.
2. Run `lgrControlGui`.

## 15.4. Recording Exercises with the Logger Remote Control

When you record an exercise from the Logger Remote Control, each Logger records a standard `.lgr` file using a name based on the name you specified in the Record As dialog box (the base-name). The naming convention and location of the file is determined as follows:


- If the Logger Remote Control is connected to multiple Loggers, it creates a subdirectory of the default Logger recording location using the base-name. The new Logger recording is saved in this directory. It is named `base-name_remoteControlID`. For example, if the base-name is `myTest`, the Logger with a remote control ID of 1 records the file to `./loggertapes/myTest/myTest_1.lgr` and the Logger with a remote control ID of 3 records the file to `./loggertapes/myTest/myTest_3.lgr`.
- If the Logger Remote Control is connected to one Logger, you can save the recording using the same convention as for multiple Loggers by selecting the Construct File Name check box.
- If the Logger Remote Control is connected to one Logger and you do not select the Construct File Name check box, the file is saved to the default location or any location you select using the Browser button. It is saved as `base-name.lgr`.

The Logger Remote Control also records a file in its local `logger_tapes` directory. This file has the extension `.rclgr`. This file does not record any simulation data. It records the details of the Loggers that were controlled by the Logger Remote Control when the recording was made. It uses this information to control the correct Loggers when you play back the recording.

► To record an exercise using the Logger Remote Control:

1. Choose **Record > Record As**, or click the Record button (🔴) on the toolbar. The Recording File Name dialog box opens.

**Figure 81. Recording File Name dialog box**

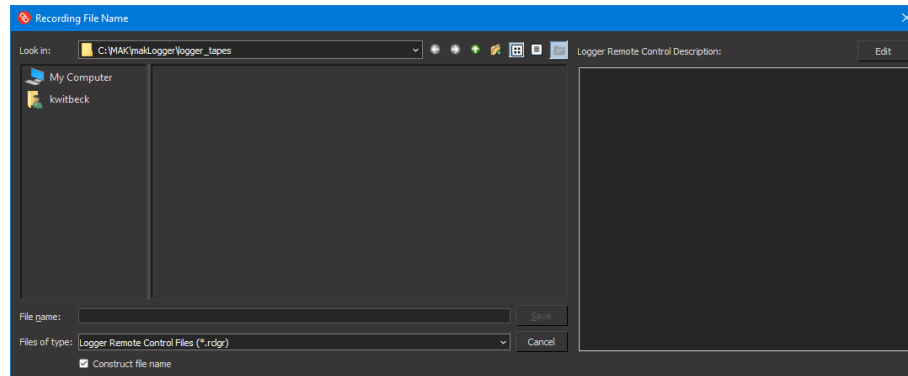

2. Enter a name for the recording (the base-name).  
If you have multiple Loggers connected, the Logger Remote Control creates a new directory for each Logger using the base-name and creates a file in that directory in the format *base-name\_remoteControlID.lgr*. (The Construct File Name check box is unavailable because this option is mandatory for multiple Loggers.)  
If only one Logger is connected and you just enter a base-name, the file is saved in the default recording directory as *base-name.lgr*. (You can also click Browse and choose the directory in which to save it, or type a complete pathname, or you can select Construct File Name and the Logger Remote Control will create a directory and file name using the same format as it does for multiple Loggers.)
3. Optionally, add a description:
  - a. In the upper right corner of the dialog box, click Edit. The description window becomes editable.
  - b. Type the description. You can type simple text or use HTML coding.
  - c. To see the resulting description, click Preview.
4. Click Save.
5. In the Logger Remote Control window, click the Record button.
6. Control the recording process as you would in a Logger window.

## 15.5. Playing Exercises with the Logger Remote Control

The process for playing files through the Logger Remote Control is similar to that for playing files directly in the Logger. The difference is that (except as noted below) rather than selecting a recording with a *.lgr* extension, you select a *.rdlgr* file. When you load the *.rdlgr* file in the Logger Remote Control, it sends a message to each Logger and instructs it to load its local version of the *.lgr* file.

**i** If the Logger Remote Control is controlling just one Logger, you have the option of opening a regular Logger file (*.lgr*) located in the Logger's default directory, rather than a local Logger Remote Control file (*.rclgr*).

► **To play a Logger file using the Logger Remote Control:**

1. Choose **File > Open**. The Open File dialog box opens.
2. Type the name of the file you want to open, or click Browse and select a file in the Open File dialog box.
  - If the Logger Remote Control is connected to multiple Loggers, the file must have the extension *.rclgr*.
  - If the Logger Remote Control is connected to one Logger and you want to load a Logger file that does not have a *.rclgr* file associated with it, select Bypass Remote Control File. (This option is disabled if the Logger Remote Control is connected to multiple Loggers.)
3. Click OK.
4. Choose **Play > Play/Pause**, or click the Play button () on the toolbar.
5. Manage playback using the Play controls as you would in a Logger window.


## 15.6. Configuring the Logger Remote Control Connection

A Logger Remote Control connection has parameters that you can change. The default port is 4053. If you want to change the port, you have to change it in the Logger Remote Control and in the configuration file for each remotely controlled Logger.

The Destination Address must match the value of the `backChannelAddress` variable in the configuration files for the remote Loggers (default: 229.7.7.23).

► **To edit a Logger Remote Control's connection:**

1. In the Logger Remote Control, choose **File > Connection**. The Connection dialog box opens (Figure 82).

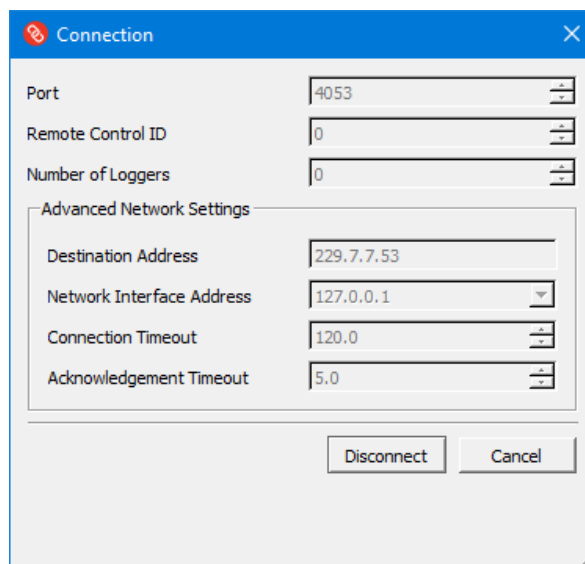**Figure 82. Connection dialog box**

2. If the Logger Remote Control is connected, none of the parameters are editable. Click Disconnect.
3. Change any of the parameters that you want to change.
4. Click Connect.

## 15.7. Specifying the Refresh Rate


The Logger Remote Control refresh rate determines how frequently the Logger Remote Control gets the current time from the remote Loggers. Decreasing the frequency reduces network traffic, but means that the timeline in the Logger Remote Control advances less smoothly. The default is three times per second.

► **To specify the refresh rate:**

1. Choose **File > Refresh Rate**. The Refresh Rate dialog box opens.
2. Enter a value, in updates per second.
3. Click OK.

## 15.8. Setting the Timebar Color

Each connected Logger is given a timebar color. When you record or play a file, a timebar for each Logger displays in the Logger Remote Control timeline. If the Loggers are recording or playing at the same rate, there is no differentiation from the different time bars, but if a Logger stops recording or is delayed for some reason, there are the individual timebars (Figure 83). This alerts you to the possibility that there is a problem with one of the Loggers.

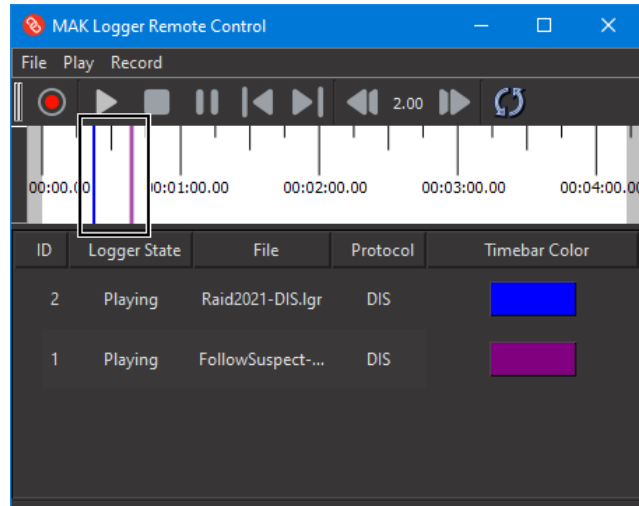**Figure 83. Logger Remote Control timebars**

► **To change the color of the timebar for a Logger:**

1. Click the color swatch that you want to change. A color picker dialog box opens.
2. Select the new color.
3. Click OK.

## 15.9. Exiting the Logger Remote Control and Connected Loggers

When you shut down the Logger Remote Control, you can also shut down the connected Loggers at the same time.

- To shut down the Logger Remote Control and connected Loggers, choose **File > Exit and Quit Loggers**.

## 15.10. Logger Remote Control Command-line Options

You can run the Logger Remote Control from the command line. Table 45 lists command-line options.

**Table 45. Logger Remote Control command-line options (lgrControlGUI)**

Option	Description
(--   --ignore_rest)	Ignores the rest of the labeled arguments following this flag.
--acknowledgeTimeout <i>timeout</i>	The amount of time, in seconds, that the Logger Remote Control waits for an acknowledgment message from the Loggers to which it sends commands. If an acknowledgment is not received within this timeout interval, the command is considered lost.
--backChannelAddress <i>address</i>	The destination address for back channel communication.

**Table 45. Logger Remote Control command-line options (lgrControlGUI) (continued)**

Option	Description
<code>--backChannelInterface <i>address</i></code>	The interface to use for the back channel communication.
<code>--backChannelPort <i>port</i></code>	The port used by the Logger Remote Control. It must be the same for the Logger Remote Control and all connected Loggers. Default: 4053.
<code>--connectionTimeout <i>timeout</i></code>	The amount of time, in seconds, to wait before timing out a connection. Default: 120 seconds.
<code>(-G   --locale) <i>language</i></code>	Specifies the locale (for localization).
<code>(-h   --help)</code>	Displays usage information and exits.
<code>--numberOfLoggers <i>number</i></code>	The maximum number of Loggers to connect to. 0 means connect to all available Loggers.
<code>--remoteControlId <i>ID</i></code>	The ID of the Logger Remote Control. Must be unique among all running Loggers.
<code>(-v   --version)</code>	Displays version information and exits.



## A. Troubleshooting

This appendix describes how to identify and correct the most common network problems that prevent the Logger from sending and receiving data properly. If your problem is not covered here, visit MAK's [Support Portal](#) to request assistance.

A.1. Troubleshooting Logger Network Communications (DIS Only) .....	226
A.1.1 Using the Correct Broadcast Address and UDP Port .....	226
A.2. Playing HLA 1.3 Logger Files in HLA 1516 Federations .....	226
A.3. Playing DIS Files with VR-Forces Embarkation .....	227
A.4. Using Older MAK RTIs with HLA 1516 .....	227

## A.1. Troubleshooting Logger Network Communications (DIS Only)

In a typical DIS exercise, VR-Link applications (including the Logger) communicate with other applications using broadcast UDP/IP over a local area network. All applications in the exercise use the same IP broadcast address, and each application's host machine has a network interface device that is configured for that address. All machines must share a common netmask.

In addition, all participating applications must use the same UDP port.

If the Logger uses an IP address, netmask or port that is different from that used by your other applications, communication problems occur.

### A.1.1 Using the Correct Broadcast Address and UDP Port

By default, the Logger communicates to the host machine's default broadcast address, using UDP port 3000. If the Logger appears to start normally, but fails to communicate with other DIS applications, the Logger may be using an incorrect broadcast address or UDP port. You can correct this problem by running the Logger with arguments that explicitly specify the correct address and port:

1. Determine the broadcast address used by your other DIS applications. This may be the network's default broadcast address, or may be specified through the application's startup command or configuration file at startup. For more information, see your System Administrator or use the Linux `ifconfig` command to display the broadcast address.
2. Determine the UDP port used by your other applications.
3. Start the Logger and notice the status message that appears at startup:
4. NetSocket ok for port 3000 to 123.456.789.255
5. If the port and address in the status message do not match those used by your other applications, exit the Logger and restart using the Address option (`-A`), the DIS port option (`-P`), or both, to specify the appropriate values. Enter:

```
loggerversion -A address -P port
```

where *address* and *portnum* are the broadcast address and UDP port used by your other applications, for example:

```
loggerversion -A 123.456.999.255 -P 3020
```

## A.2. Playing HLA 1.3 Logger Files in HLA 1516 Federations

In general, the Logger uses the same file format for HLA 1.3 and HLA 1516 Logger files. You can record a Logger file from an HLA 1.3 federation, and play it back into an HLA 1516 federation (and vice versa). However, you must use the same FOM representation during record and playback. For example, if you use an HLA-1.3-style FED file during recording, you must use an HLA-1.3 style FED file during playback, even if you are using the IEEE 1516 version of the Logger and an IEEE 1516 RTI. (VR-Link and the MAK RTI allow you to use HLA-1.3-style FED files with IEEE-1516-based federates, and vice versa).

The main reason that consistency in FOM format is necessary is that IEEE 1516 uses different names for the "Root" classes of the Object class hierarchies. A 1.3-style FED file requires a Root class a 1516-style XML files requires a Root class called HLAObjectRoot.

The reason this can be a problem is that if the Logger is playing an HLA-1.3-based Logger file into a federation that is using a 1516-based XML file it might come across an instance of a class called, for example, "ObjectRoot.Vehicle". If it tries to register an object of this class, the RTI will complain that no such class exists. There might be a class called HLAObjectRoot.Vehicle in the current FOM, but the RTI or Logger does not know that this is actually the same class.

### **A.3. Playing DIS Files with VR-Forces Embarkation**

Logger files that include the VR-Forces embarkation feature in DIS exercises do not reset embarkation status after time jumps. To correct the embarkation state of entities, stop playback and start playing the file from the beginning.

### **A.4. Using Older MAK RTIs with HLA 1516**

The HLA 1516 Logger crashes on exit if you use the MAK RTI 2.4.2 through 3.1.1. This is due to a problem in the RTI.





## B. FED File Naming Conventions

This appendix describes the naming conventions used for FED files.

B.1. FED File Naming Conventions .....	230
B.2. FED File Mappings .....	230

## B.1. FED File Naming Conventions

Logger 5.11.1 includes FED files to support FOM mappers for different versions of the HLA specification. Logger 5.4 and later use the FOM naming conventions introduced in VR-Link 5.2. Prior releases used different names for FED files. This section describes the newer conventions and how to map older FED files to the new ones.

Historically, VR-Link named FED files using the convention *VR-Link<RPR FOM version>.fed* or *VR-Link<RPR FOM version>.xml*. For example, the FED file for RPR FOM 2, draft 17 was *VR-Link20017-1.fed*. This naming scheme had two problems. First, it was confusing for end-users of applications that use VR-Link (but who are not themselves VR-Link customers) to be using a FOM named that way. Second, the filename was not versioned, so any updates that we would make to the existing FOMs could cause compatibility problems. In fact for this latter reason, we had refrained from fixing a few minor bugs that we found over the years.

Effective with VR-Link 5.2, the naming convention is: *MAK-<FOM name><FOM revision><FOM version>.fed* (or *.xml*, or *\_evolved.xml*, as appropriate). For example, *VR-Link20017-1.fed* was renamed *MAK-RPR20017-1-1.fed*.

Additionally, given the power of HLA Evolved FOM Modules, starting with RPR 2.0 we provide the RPR standard FOM for HLA Evolved, currently named *RPR\_FOM\_v2.0\_1516-2010*. MAK's extensions are in FOM Modules that our software automatically adds to an exercise. This means that if you have another RPR-based FOM, such as NETN or NASMP, you will have a much easier time using it without needing to modify the FOM.

## B.2. FED File Mappings

Table 46 lists legacy FED files and how they map to new FED files. Many of the FED files delivered in previous releases do not have updated versions, usually because they are rarely used. The table lists only those that map to new values.

**Table 46. Old FED file to new FED file mappings**

Old FOM	New FOM
<b>HLA 1.3</b>	
VR-Link.fed	MAK-RPR2-1-10.fed
VR-Link10.fed	MAK-RPR2-1-10.fed
VR-Link20017-1.fed	MAK-RPR20017-1-1.fed
VR-Link20017-6.fed	MAK-RPR20017-6-1.fed
VR-Link20020.fed	MAK-RPR2-1-10.fed
VR-LinkMC02.fed	MAK-RPR1-MC02-1-1.fed
VR-LinkTM.fed	MAK-RPR1-TimeManagement-1-1.fed
<b>1516-2000</b>	
VR-Link.xml	MAK-RPR2-1-10.xml

**Table 46. Old FED file to new FED file mappings (continued)**

Old FOM	New FOM
VR-Link20017-1.xml	MAK-RPR20017-1-1.xml
VR-Link20017-6.xml	MAK-RPR20017-6-1.xml
VR-Link20020.xml	MAK-RPR2-1-10.xml
VR-LinkTM.xml	MAK-RPR1-TimeManagement-1-1.xml
<b>HLA Evolved</b>	
DIGuyModule_1300.xml	MAK-DIGuy-7_evolved.xml
RPR_FOM_v2.0_draft20_1516-2010.xml	RPR_FOM_v2.0_1516-2010.xml
VR-Link20017-1_base_evolved.xml	NETN-BASE.xml
VR-Link20017-1_evolved.xml	MAK-RPR20017-1-1_evolved.xml
VR-Link20017-6_base_evolved.xml	NETN-BASE.xml
VR-Link20017-6_evolved.xml	MAK-RPR20017-6-1_evolved.xml
VR-Link_LgrControl_evolved.xml	MAK-LgrControl-2_evolved.xml
VR-Link_VrlExt_evolved.xml	MAK-VRFExt-9_evolved.xml
VR-Link_base_evolved.xml	NETN-BASE.xml
VR-Link_evolved.xml	MAK-RPR1-1-1_evolved.xml
updateRate.xml	MAK-updateRate-1_evolved.xml
VR-LinkBOML16_module.xml	MAK-BOML16-1_evolved.xml
	MAK-VRFAggregate-6_evolved.xml

FOMs that do not have newer equivalent FOMs are:

- HLA 1.3: DI-Guy-13\_0.fed, DI-Guy.fed, VR-Link05.fed, VR-Link07.fed, VR-Link08.fed, VR-Link16.fed, VR-Link20006.fed, VR-Link20014.fed, VR-Link20017.fed, VR-LinkBOML16.fed, VR-LinkDDM.fed, VRL-20017-1-Link16.fed, VRL-DIGuy20017.fed, VRL-DIGuy20017DDM.fed.
- 1516-2000: DI-Guy-13\_0.xml, DI-Guy.xml, VR-Link20014.xml, VR-LinkBOML16.xml, VR-LinkDDM.xml, VRL-DIGuy20017.xml, VRL-DIGuy20017DDM.xml.
- HLA Evolved: DIGuyModule\_1302.xml, MAK-Aerodrome-1\_evolved.xml, MAK-DER-1\_evolved.xml, MAK-DynamicTerrain-2\_evolved.xml, MAK-METOC-1\_evolved.xml, NETN-METOC.xml, NETN-MRM.xml, NETN-Physical.xml, MAK-Physical-2\_evolved.xml, RPR-Enumerations\_Experimental\_IFF.xml, RPR-MAK\_Experimental\_IFF-3.xml, VR-Link20014\_base\_evolved.xml, VR-Link20014\_evolved.xml, VR-Link20017-1\_base\_evolved\_withUpdateRate.xml, VR-Link20017-1\_evolved\_withUpdateRate.xml, VR-LinkDDM\_base\_evolved.xml, VR-LinkDDM\_evolved.xml, VR-Link\_ViewControl\_evolved.xml, VRL-DIGuy20017DDM\_evolved.xml, VRL-DIGuy20017\_evolved.xml.





# MAK Products Glossary

This glossary defines terms used in MAK ONE product documentation.

**A****absolute dead reckoning**

A method of dead-reckoning in which an application uses the timestamps contained within state updates if the sender is using absolute timestamping. Contrast with relative dead reckoning.

**aggregate**

The combination of individual entities, aggregates, or both into a single object — for example, an organizational group such as a platoon.

**API**

Application Programming Interface.

**articulated part**

A part of an entity that is capable of movement relative to the entity, such as a wheel, turret, or gun.

**attached part**

An object that is attached to another object, such as a rocket attached to a jet.

**B****body coordinate frame**

A coordinate framework centered on an entity. To represent the orientation of an entity, an application uses Euler angles or a rotation matrix that rotates from a reference frame to the body coordinate frame.

**C****channel**

A channel renders the view of an observer in a 3D visualization application.

**clipping**

A feature that prevents the display of terrain and objects or parts of objects, that are closer than or farther than specific distances from the observer.

**clipping planes**

The range of distances from the observer (near clipping and far clipping) in which an application clips (does not display) objects.

**culling**

The process of discarding database objects which are not within view, and therefore need not be rendered and displayed.

**Cartesian coordinates**

A system for indicating location by means of three planes intersecting at right angles to one another at the origin.

**D****Data Distribution Management**

The set of High-Level Architecture services used to specify the routing of data between publishers and subscribers. DDM adds greater control over the Declaration Management (DM) services that only specify filtering based on the class of the data (e.g., ground vehicle versus aircraft). DDM uses the data content to express regions of interest and regions of affect whose overlap establish a communication channel. An example is geographic filtering where a publisher indicates a region around the entity or effect and a subscriber indicates a region expressing its sensor range.

**dead-reckoning**

A process by which an application calculates the expected location of an entity during periods between state updates, based on velocity, acceleration, and rotational velocity. See also absolute dead reckoning and relative dead reckoning.

**DDM**

See Data Distribution Management.

**Defense Modeling and Simulation Office**

The former name of the executive secretariat for the Executive Council on Modeling and Simulation (EXCIMS), which provided a full-time focal point for information concerning Department of Defense modeling and simulation (M&S) activities. Renamed Modeling and Simulation Coordination Office. Currently the MSCO promulgates M&S policy, initiatives, and guidance to promote cooperation among DoD components to maximize efficiency and effectiveness.

**DIS**

See Distributed Interactive Simulation.

**DIS data packets**

See Protocol Data Unit.

**display engine**

An object in an application that can render 3D data.

**Distributed Interactive Simulation**

The DIS protocol is a set of standards that govern how participating applications share information about the virtual world. The protocol specifies a set of packets, called protocol data units (PDUs), that communicate this information. Each PDU identifies the sender and contains other information depending on the PDU type. The DIS protocol also specifies when and how frequently PDUs are sent.

The DIS protocol has been superseded by the High-Level Architecture for use by the Department of Defense.

**DMSO**

See Defense Modeling and Simulation Office.

**E****element definition**

In VR-Forces and VR-Vantage, an element definition specifies all of the visualizers that control the various aspects of visualizing a scene element. For example, an element definition includes the main model or military symbology, trailing effects, cockpit displays, and so on.

**emitter**

A simulated device on an entity that emits electromagnetic radiation, for example, radar.

**entity**

An element in a simulation, such as a vehicle or a person, that is represented in the simulation through the issuance of state messages.

**entity maintenance**

A process by which the MAK Data Logger compensates for discontinuities following a time jump. The Logger sends out interim state messages for entities that were present before the time jump so that they do not time out before the next update message arrives.

**entity-type**

A list of seven components as specified by the DIS protocol and the HLA RPR FOM. If none of the seven components contains a wildcard (-1) value, then the entity type refers to a specific, narrowly-defined entity. If some components contain a wildcard, then the entity type refers to a class of entities. A larger number of wildcards indicates a broader, more general class.

The components of an entity-type are:

- Entity kind
- Domain
- Country
- Category
- Subcategory
- Specific
- Extra.

**environmental process**

According to the IEEE 1278.1a specification (DIS), environmental process PDUs communicate simple environment variables, small scale environmental updates, and embedded processes.

**Euler angles**

A set of three angles used to describe the orientation of an entity as a set of three successive rotations about three different orthogonal axes (x, y, and z). These angles specify successive rotations needed to transform from a reference coordinate system to the entity's body coordinate system.

**event**

An interaction between objects or between an object and the terrain, such as firing of a munition, or a collision of entities.

**exercise**

The DIS term for a one or more interacting simulation applications. Compare to federation execution in HLA.

**exercise connection**

The object (DtExerciseConn) through which a VR-Link application connects to the network. State messages are sent through the exercise connection and information about remote entities is received through the exercise connection. (All MAK ONE products are VR-Link applications.)

**exercise ID**

A numeric identification for a DIS simulation exercise.

**F****FED file**

Federation Execution Data file. The Federation Execution Data is the subset of FOM data needed and read by the MAK Products Glossary. VR-Link applications also read the FED file.

**federate**

A connection to the MAK Products Glossary. Typically a single simulation application can be thought of as a federate.

**federation**

A group of HLA federates capable of playing in the same federation execution.

**Federation Object Model**

Defines the data content of a federation execution.

**federation execution**

The federation execution represents the actual operation, over time, of a subset of the federates and the RTI initialization data taken from a particular federation. A federation execution is the logical equivalent of a DIS simulation exercise.

**field of view**

Controls the perspective of the observer.

A wide field of view creates an effect like that of a wide-angle camera lens. Objects appear smaller and farther away from the observer, since the observer coverage spans a wider area. Depth become exaggerated.

A narrow field of view creates an effect like that of a telephoto lens. Objects appear larger and closer to the observer, and the overall scene depth appears flattened. The distances between objects appears compressed.

**filter range**

A setting that prevents distant entities from being processed while allowing distant terrain to appear normally.

**FOM**

See Federation Object Model.

**FOM Module**

In HLA Evolved, defines additional modular data content for a federation execution, usually extensions to an existing Federation Object Model. (Also supported by the HLA 1.3 and HLA 1516 versions of the MAK RTI. Per the HLA Evolved interface specification:

“A partial FOM (containing some or all OMT tables) that specifies a modular component of a FOM. A FOM module may contain classes not inherent to it but upon which the FOM module depends, i.e., superclasses to the modular components. These superclasses will be included in the FOM module either as complete or scaffolding definitions.”

**frame rate**

The rate at which the application displays updated images.

**G****ground clamping**

A process by which the a 3D visualization application keeps an entity anchored to the surface of its terrain database, regardless of the altitude data contained in its entity state message.

**geocentric coordinates**

A coordinate system calculated with respect to the earth's center. The origin of the geocentric coordinate system is the center of the earth. The positive X-axis passes through the prime meridian at the equator; the positive Y-axis passes through 90 degrees east longitude at the equator; and the positive Z-axis passes through the north pole.

**geodetic coordinates**

A coordinate system in which position is determined relative to a reference ellipsoid, such as the surface of the earth at sea level. In MAK ONE applications, geodetic coordinates consist of latitude and longitude in radians, and altitude in meters above the reference ellipsoid.

**gridded data**

Data that has been processed in a rectangular array of points, in X, Y or latitude/longitude, at which single data values define a two dimensional function. According to the IEEE 1278.1a specification, gridded data transmits information about large-scale or high-fidelity spatially and temporally varying ambient fields and about environmental processes and features.

**guise**

An alternative entity type used to display an object depending on the force ID. For example, a tank could look like an M1A1 to friendly forces and a T72 to hostile forces.

**H****head-up display**

A set of indicators and readouts superimposed onto a graphics display. Also called an overlay.

**heartbeat**

In DIS, the frequency with which current Protocol Data Units are sent to the network regardless of whether the entity's state has changed.

**High-Level Architecture**

The High Level Architecture (HLA) for simulations is a U.S. Department of Defense (DOD)-wide initiative to provide an architecture to support interoperability and reuse of simulations. The HLA supersedes DIS for the DOD.

**HLA**

See High-Level Architecture.

**I****IG**

image generator

**interaction**

A message describing a simulation event. An interaction describes an event, it does not update an objects state.

**L****Logger control PDUs**

A set of DIS PDUs or HLA interactions that let you control the MAK Data Logger remotely.

**logical range**

A suite of TENA Resources, sharing a common object model, that work together for a given range event. Similar in concept to the HLA Federation.

**Local RTI Component**

The libraries on a computer that implement a Run-Time Infrastructure. A federate communicates with the HLA network through the LRC.

**LRC**

See Local RTI Component.

**M****MÄK Technologies Lisp**

An adaptation of the Lisp language used in configuration files for MAK ONE products.

**message**

A general term used to refer to DIS PDUs and HLA interactions and state updates. In TENA, a message is similar to an HLA interaction.

**MIM**

The MOM & Initialization Module (MIM) allows for extensions to be made to the High-Level Architecture standard MOM. It is a subset of the Federation Object Model that contains OMT tables that describe the HLA MOM. The MIM also contains additional predefined HLA constructs such as object and interaction roots, data types, transportation types and dimensions. HLA specifies a standard MIM that is incorporated into all FDDs automatically by the Run-Time Infrastructure. The standard MIM can be replaced with a user-supplied MIM containing the standard MIM plus extensions.

**model definition**

In VR-Forces and VR-Vantage, a model definition specifies the 3D model and other basic attributes of a model. It is referenced by an element definition.

**Modeling and Simulation Coordination Office**

The executive secretariat for the Executive Council on Modeling and Simulation (EXCIMS), which provided a full-time focal point for information concerning Department of Defense modeling and simulation (M&S) activities. The MSCO promulgates M&S policy, initiatives, and guidance to promote cooperation among DoD components to maximize efficiency and effectiveness. (Formerly DMSO)

**MSCO**

Modeling and Simulation Coordination Office. (Formerly DMSO.)

**MTL**

See MAK Technologies Lisp.

**N****NETN FOM**

The NETN FOM (NATO Education and Training Network Distributed Simulation Federation Object Model) is an extension of the RPR FOM 2.0, allowing other federates using pure RPR FOM to interoperate with applications using the NETN FOM.

**O****orientation clamping**

Adjusts the pitch and roll of an entity so that it appears properly seated when the terrain is inclined. For example, if a tank is moving horizontally across the face of a hill, orientation clamping prevents the tank from appearing level, and therefore, partially embedded into the hillside. Used with ground clamping.

**object**

An element in a simulation that has persistence, as opposed to an interaction, which is a transient element.

**object handle**

An integer that an application uses to identify a particular object in Run-Time Infrastructure service calls. An object handle is meaningful only to a particular federate. The same object can be known to different federates by different object handles.

**object name**

A character string that can be used to identify an object. In HLA, the object name is known to the Run-Time Infrastructure, and the RTI provides functions to find out an object's name, given its handle, and vice versa. Object names can be chosen by applications that register the objects with the RTI, however if you do not want to choose names for objects, the RTI will assign names for you.

**observer**

In MAK ONE 3D applications, the point of view into the scene. (Called the eyepoint in MAK Stealth 6.x and earlier.)

**P****PDU**

See Protocol Data Unit.

**Protocol Data Unit**

A unit of data message (packet) that is passed on a network between DIS simulation applications.

**R****radio transmitter**

A simulated device on an entity, capable of transmitting radio communications.

**radio receiver**

A simulated device on an entity, capable of receiving radio communications.

**Real-time Platform Reference FOM**

An HLA reference Federation Object Model based on the DIS protocol.

**recording**

A MAK Data Logger file that stores a history of the interactions in a simulation for playback.

**reflected entity list**

A list of entities simulated by remote applications (federates in HLA) and about which the local simulation has received information over the network.

**reference FOM**

A Federation Object Model designed to be used as a whole, or with modification, by a wide variety of similar federation executions.

**relative dead reckoning**

A method of dead reckoning in which an application approximates the location of an object based on the local time of receipt of the last state update message. Contrast with absolute dead reckoning.

**remote display engine**

A display engine running in an application that is separate from the master application, and which is controlled by the master application.

**RID file**

See RTI Initialization Data.

**RTI Initialization Data**

Data required by a Run-Time Infrastructure during initialization, independent of the FOM being used. RID data is usually dependent on a specific implementation of the RTI.

**RPR FOM**

See MAK Products Glossary.

**RTI**

See Run-Time Infrastructure.

**Run-Time Infrastructure**

A library and other supporting software that implements the HLA interface specification. All federates communicate with one another in an HLA environment through RTI functions.

**S****scene element**

In VR-Vantage and VR-Forces, any object that is rendered in the scene, such as an entity model, interaction, or tactical graphic.

**Simulation Interoperability Standards Organization**

A group that seeks to promote modeling and simulation interoperability and reuse for the benefit of diverse M&S communities, including developers, procurers, and users, world-wide.

**simulation time**

In VR-Forces, simulation time is used in dead-reckoning of remote entities and thresholding of local entities. Typically, simulation time is set once during each iteration of the application's main simulation loop so that all entities are dead-reckoned based on the same value of current time.

**SISO**

See Simulation Interoperability Standards Organization.

**smooth period**

The period of time over which trajectory smoothing takes place.

**smoothing**

A method of ensuring that transitions from an entity's dead-reckoned position to its actual position are not so abrupt as to be visually disconcerting.

**state**

The current status of an object, including location, direction of movement, extent of damage, and so on.

**T****tape**

An alternative term for a Logger recording. Not a physical magnetic tape.

**terrain following**

In a 3D visualization application, causes the observer (eyepoint) to maintain a constant distance above the terrain surface. The observer's height changes in tandem with the peaks and valleys as it passes over the geography.

**timeout**

The period of time in which an application continues to display an entity after that entity's update messages have stopped appearing on the network. Time-outs are usually not used in HLA because there is no set frequency (no heartbeat) for transmitting messages.

**timescale**

A factor by which time is accelerated or slowed during playback of a Data Logger recording.

**topographic coordinates**

A right-handed Cartesian coordinate system whose X-Y plane is tangent to the earth's surface at the origin, with the positive X axis pointing north, the positive Y axis pointing east, and the positive Z axis pointing down. There are an infinite number of topographic coordinate systems – one for each point on the earth's surface.

**topographic coordinate frame**

A coordinate frame in the context of the terrain.

**trajectory smoothing**

A method used by to smooth positional discontinuities that could occur when new state updates arrive.

**U****UDP port**

A network channel through which an application sends and receives data for DIS exercises.

**Universal Transverse Mercator**

In general, a non-cartesian coordinate system in which the X, Y, and Z correspond to easting (nearly east), northing (nearly north), and height above an ellipsoid that approximates the surface of the earth.

## UTM

See Universal Transverse Mercator.



## view control messages

A set of programmatic messages that let you control the view in VR-Vantage applications remotely.



# Index

## -

- command-line option, 100
- a command-line option, 71, 102
- A command-line option, 72, 102

## A

- acceleration scaling, 52

### Access

- configuring data source for, 180
- exporting to, 180
- importing data to Excel, 190

- AddCustomPDU command, 211

### adding

- annotation, 138
- command to lgrConfig.xml, 98
- instant annotation, 139
- variable to lgrConfig.xml, 98

### address

- multicast, 102

### advisory message

- configuring, 210
- ignoring, 63

## -

- allowAllRemoteControl command-line option, 100
- allowPlaybackWithoutRegions parameter, 90, 208
- analyzing
  - data, 157

- annotation, 138

- bounding playback to, 144
- converting type, 141
- creating, 138
- deleting, 142
- editing, 141
- file, 138
- importing annotation file, 141
- instant
  - adding, 139
  - jumping, 142
- loading automatically, 124
- opening annotation file, 140
- saving file, 140
- selecting, 141
- updating, 140
- zooming timeline to, 142

- AppendFileToEnd command, 213

### appending

- file, 170, 213-214

### application

- number, 71, 212
- specifying, 102

## -

- appNumber command-line option, 71, 102
- argument type, 196
- array, 160, 162
- arrayBracketMap parameter, 166
- asynchronous I/O, 212
  - configuring, 72
- attribute
  - annotation, 141

- class, 159
- connection, 57
- list
  - hiding, 157
- object, 160
- scaling
  - enabling or disabling, 204
- updating, 160
- viewing object, 159
- attribute value update
  - requesting, 69
  - sending, 69
- attributeMap parameter, 166
- automatic
  - playback, 124
  - recording, 117

## B

- backup
  - enabling or disabling, 199
  - file, 121, 199
- bak file, 121, 199
- beginning
  - moving to, 130
- bracket
  - array elements
    - Traffic Analyzer, 165
- broadcast address, 72, 226
- buffer
  - send and receive, 73
- button bar, 105

## -

- c command-line option, 100

## C

- callstack.log file, 35
- canceling
  - recording, 200
- CancelRecording command, 200
- changing
  - connection settings, 57
  - data delimiter, 163
  - datatype mapping, 163
  - delimiter, 158
  - timebar color, 222
  - traffic analyzer coordinate system, 164

- check box
  - Construct File Name, 219
- checkpoint
  - skipping to, 127
- checkpoint policy, 78, 201
- class
  - filtering by (HLA), 152
  - interaction, 159
  - object, 159
- classes
  - subscribing to, 66
- clearing
  - file segment, 168
  - packets from file, 213
- ClearSection command, 213
- ClosePlaybackFile command, 198
- CloseRecordFile command, 200
- closing
  - file, 110, 198
  - recording, 200
- color
  - timebar
    - changing, 222
- command, 78
  - AddCustomPDU, 211
  - adding to lgrConfig.xml, 98
  - AppendFileToEnd, 213
  - CancelRecording, 200
  - ClearSection, 213
  - ClosePlaybackFile, 198
  - CloseRecordFile, 200
  - CommonEntityIds, 211
  - CommonObjectNames, 205
  - Connect, 202
  - ConvertFile, 213
  - CutSection, 213
  - DeleteFile, 197
  - Disconnect, 202
  - Editor domain, 212
  - EnableRequestUpdates, 69, 205
  - Exit, 197
  - ExportFile, 213
  - ExportSection, 213
  - FilterEntityIds, 211
  - FilterEntityTypeTypes, 147, 202
  - FilterObjectNames, 205
  - Help, 197
  - HLA simulation domain, 205
  - in configuration file, 97
  - list of, 214
  - LoadPlugin, 197
  - LoadSubscriptionListFile, 68, 86, 205
  - MergeInFile, 213

---

NewFile, 200  
 OffsetTime, 214  
 OpenFile, 198  
 Pause, 198  
 PauseRecording, 200  
 Play, 198  
 Player domain, 198  
 PlayPause, 198  
 PrefixFileToStart, 214  
 Record, 200  
 Recorder domain, 200  
 RecordToMultipleFiles, 200  
 Restart, 198  
 RevertFile, 199  
 running at startup, 100  
 SaveFile, 199  
 SaveFileAs, 199  
 SaveSubscriptionListFile, 67, 205  
 SetBackChannelConnection, 202  
 SetBackupOnSave, 121, 199  
 SetCheckpointParameters, 79, 201  
 SetConnectionParameters, 59, 70, 202, 206, 212  
 SetCurrentTime, 199  
 SetDdmParameters, 85, 89, 208  
 SetDefaultTapeDirectory, 197  
 SetDisableTimeManagementTest, 210  
 SetDrainInput, 210, 212  
 SetDynamicNamePrefix, 49, 210  
 SetEntityTracking, 80, 197  
 SetFastJumpsWithoutDiff, 80-81, 197  
 SetFollowingExportInterval, 199  
 SetFollowingInterval, 199  
 SetGuiConfigFilename, 108, 197  
 SetHeartbeatIntervals, 80, 82, 210  
 SetHeartbeatRate, 212  
 SetIgnoreAdvisories, 63, 210  
 SetListenWhenIdle, 202  
 SetLoopAtEnd, 199  
 SetNotifyLevel, 91, 198  
 SetPacketViewInterval, 199  
 SetPassiveSubscription, 68, 210  
 SetPauseOnRecordAs, 201  
 SetPlaybackReadTimeLimit, 80-81, 198  
 SetPlaybackSpeed, 199  
 SetPlayOnLoad, 199  
 SetRecordToMultipleFilesSettings, 201  
 SetRemoteControlId, 202-203  
 SetRemoteControlSettings, 203  
 SetSaveConnectionConfiguration, 204  
 SetScaleAttributes, 204  
 SetSendOnlyUpdatedValues, 69, 205  
 SetSkippingPlaybackThreshold, 199  
 SetStartStopTimes, 200  
 SetStopCondition, 201  
 SetStopDuration, 201  
 SetStopSize, 201  
 SetSubscriptionLists, 67, 98, 211  
 SetTempDir, 198  
 SetTimeManagement, 65, 211  
 SetTimeoutIntervals, 80, 83, 211  
 SetTimeoutRate, 212  
 SetVRFFiltering, 205  
 SkipTime, 200  
 StopPlayback, 200  
 StopRecording, 202  
 syntax in lgrConfig.xml, 97  
 System domain, 197  
 TrimStart, 214  
 Unpause, 200  
 UnpauseRecording, 202  
 command-line  
     Logger Remote Control, 223  
 command-line interface, 195  
     domains, 196  
 command-line option, 78, 194  
     --, 100  
     -a, 71, 102  
     -A, 72, 102  
     --allowAllRemoteControl, 100  
     --appNumber, 71, 102  
     -c, 100  
     --configFile, 95, 100  
     -D, 102  
     --defaultTapeDir, 100  
     --destAddrString, 72, 102  
     --deviceAddrString, 102  
     --disableTMTTesting, 101  
     --disPort, 70, 102  
     --disVersion, 102  
     -e, 71, 102  
     --enableTrafficAnalyzer, 101  
     --execName, 60, 101  
     --exercisId, 71, 102  
     -F, 61-62, 101  
     -f, 63, 101  
     --federateName, 59, 101  
     --federateType, 60, 101  
     --fedFileName, 61  
     filename, 100  
     --filterEntityIds, 102  
     --filterEntityTypes, 100  
     --filterObjectNames, 101  
     --fomMapperData, 64, 101  
     --fomMapperLib, 63, 101  
     --fomModules, 61, 101  
     -G, 100

- h, 100
- ignoreAdvisories, 63, 101
- l, 92, 100
- locale, 100
- logFileName, 100
- loggerTickRate, 100
- m, 91, 100
- maxDrainInputTime, 101
- mcastAddresses, 75, 102
- mcastTtl, 102
- messageLevel, 100
- MIM, 61, 101
- N, 59, 101
- n, 91, 100
- notifyLevel, 100
- P, 70, 102
- r, 100
- recvBufferSize, 102
- rprFomRevision, 62, 101
- rprFomVersion, 62, 101
- runCommand, 100
- s, 71, 102
- S, 75, 102
- sendBufferSize, 102
- showConsole, 100
- siteId, 71, 102
- table of, 99
- timeConstrainingRecording, 101
- timeRegulatingPlayback, 101
- useEmptyFomMapper, 63, 101
- v, 100
- version, 100
- x, 60, 101
- CommonEntityIds command, 211
- commonEntityTypes parameter, 147
- CommonObjectNames command, 205
- complex datatype, 158
- component files, 38
- concatenating
  - files, 170, 214
- 
- configFile command-line option, 95, 100
- configuration
  - MAK RTI file, 42
  - window
    - saving and restoring, 105
- configuration file, 95
  - adding string list, 98
  - datatypeDefault.mtl, 158
  - entity-type-dict.csv, 165
  - GUI, 107
  - SISO-REF-010.xml, 165
  - specifying, 100
  - trafficAnalyzerConfig.mtl, 165
- configuration parameter, 78
  - useAsyncIO, 72
- configuring
  - advisory messages, 210
  - application number, 71
  - asynchronous I/O, 72
  - data source for Microsoft Access, 180
  - data source for MySQL, 183
  - DDM, 91
  - DIS, 72
    - heartbeat, 212
    - timeout, 212
  - FED file, 101
  - filtering, 205
  - GStreamer pipeline, 94
  - high speed playback, 127
  - HLA connection, 206
  - indexing, 78
  - list of common entity types, 147
  - Logger, 78
    - for HLA, 58
    - Logger Remote Control, 218
  - network read time, 84
  - passive subscription, 210
  - performance, 84
  - playback
    - fast, 80
  - Record As, 201
  - recording, 201
  - response to Logger Control messages, 203
  - site ID, 71
  - time management, 211
  - video playback, 93
  - video recording, 92
- Connect command, 202
- connecting, 202
  - to exercise, 57
  - to network, 57, 108
- connection
  - changing settings, 57
  - configuring DIS, 212
  - configuring HLA, 206
  - editing, 57
  - Logger Remote Control, 221
  - properties
    - saving, 57
  - settings, 57
  - status, 57
- console
  - displaying, 104

- console window, 195
  - displaying, 100
- Construct File Name
  - check box, 219
- control
  - Logger, 105
  - remote, 28, 218
- controlling multiple Loggers, 28, 218
- ConvertFile command, 213
- converting
  - annotation type, 141
- conveyed region, 88
- coordinate system
  - traffic analyzer
    - changing, 164
- crash, application, 36
- creating
  - annotation, 138
  - database
    - MySQL, 184
  - subscription control list, 66
- CSV file, 165
- cursor
  - setting to time, 199
  - timeline, 130-131
- custom PDU
  - filtering, 148
- customPdus parameter, 148
- CutSection command, 213
- cutting
  - file segment, 168
  - packets, 213



-D command-line option, 102



- dark mode, enabling and disabling, 95
- data
  - analyzing, 157
  - delimiter
    - changing, 163
  - exporting, 174-175
    - database, 176
    - Linux, 186
    - spreadsheet, 187
  - importing
    - Excel, 190
  - install, 34
- Data Distribution Management, 85

- data representation, 157
- data source
  - Access, 180
  - configuring for MySQL, 184
  - configuring for ODBC, 179
  - MySQL, 183
- data type
  - HLA, 180
- Data View, 131
- database
  - configuring MySQL data source, 184
  - configuring ODBC data source, 179
  - exporting data to, 176
  - exporting HLA data to, 180
  - importing to Excel, 190
  - MySQL
    - creating, 184
    - schema, 176
- database format
  - exported data, 175
- datatype, 158, 160, 162
  - complex, 158
  - mapping
    - changing, 163
  - supported, 158
- datatypeDefault.mtl
  - configuration file, 158
- DDM, 85
  - configuring, 91
  - conveyed region, 88
  - playback, 89
  - subscription list
    - programming, 88
- dead reckoning
  - acceleration scaling, 52
  - velocity scaling, 52
- dead space
  - removing, 214
- dead-reckoning, 83, 124
- debugging
  - callstack.log file, 35
  - dmp file, 35
  - file location, 36



- defaultTapeDir command-line option, 100
- DeleteFile command, 197
- deleting
  - file segment, 168
  - packets, 213
- delimiter
  - changing, 158

- changing data, 163
- delimiter editor, 158
- description
  - file
    - when recording, 113
    - when saving, 113
- descriptor
  - region, 86



- destAddrString command-line option, 72, 102
- destination address, 72, 212
- device address, 212



- deviceAddrString command-line option, 102
- directory
  - ./bin, 38
  - ./doc, 38
  - ./logger\_tapes, 38
  - Windows default install, 34
- DIS, 30
  - application number, 71
  - asynchronous I/O, 72
  - configuring, 72
  - configuring connection, 70, 212
  - exercise ID, 49, 71
  - export to database, 179
  - filtering
    - entity types, 202
    - PDU's, 211
  - heartbeat, 74, 212
  - port
    - Logger default, 226
    - specifying, 102, 226
  - protocol version, 102
  - site ID, 71
  - timeout, 75, 212
  - version, 75
  - VR-Forces embarkation, 227



- disableTMTesting command-line option, 101
- disabling
  - attribute scaling, 204
  - backup, 199
  - entity tracking, 197
  - GUI, 104

- high speed playback, 127
- looping playback, 199
- Pause on Record As, 117
- Play On Load, 124
- time management, 210
- video recording, 92
- Disconnect command, 202
- disconnecting, 202
  - from exercise, 108
- displaying
  - console, 104
  - console window, 100
  - file information, 111
  - FOM tab, 159
  - object statistics, 132
  - version information, 100



- disPort command-line option, 70, 102



- disVersion command-line option, 102
- dmp file
  - debugging, 35
  - location, 36
- docking
  - toolbars and plug-in views, 107
- documentation
  - help, 15
- domain, 98
  - associated with command, 214
  - command, 196
- drain input
  - maximum, 101



- e command-line option, 71, 102



- editing
  - annotation, 141
  - connection, 57
  - file, 168
  - file information, 112
  - lgrConfig.xml, 95
  - point annotation, 141
  - range annotation, 141

- undoing changes, 168
- Editor domain
  - commands, 212
- empty space
  - trimming, 170
- enableDdm parameter, 89
- EnableRequestUpdates
  - command, 69, 205
- 
- enableTrafficAnalyzer command-line option, 101
- enabling
  - attribute scaling, 204
  - backup, 199
  - entity tracking, 197
  - high speed playback, 127
  - looping playback, 199
  - Pause on Record As, 117
  - Play On Load, 124
  - time management, 210
  - video recording, 92
- end
  - jumping to range annotation, 142
  - moving to, 130
- end time
  - setting dynamically, 140
  - setting for instant range annotation, 140
- ending
  - recording, 119
- end-of-file
  - setting, 124
- entity
  - common types, 147
  - filtering
    - entity tracking, 80
  - filtering by type, 202
  - maintenance, 52
- entity ID
  - filtering, 102
  - filtering by, 149
- entity tracking, 80
  - enabling or disabling, 197
- entity type
  - filtering, 202
  - filtering by, 146
  - mapping to string, 165
  - mapping type to string, 165
  - removing from filtering list, 147
- entity-type-dict.csv
  - configuration file, 165
- entity-type-map-file parameter, 165
- enumeration, 160-161
- environment variable
  - MAK\_INSTALL\_DIR, 34
  - MAKLMGRD\_LICENSE\_FILE, 40
  - RTI\_CONFIG, 42
- example
  - lgrControl, 30
  - lgrModSqlExporter, 30
  - loggerApp, 30
  - matrexTspiFomMapper, 30
  - plug-in, 30
  - programs, 30
  - sampleFilter, 30
  - stateObserver, 30
- Excel, 187
  - importing Access data to, 190
- 
- execName command-line option, 60, 101
- executable
  - installation location
    - Windows, 34
- exercise
  - connecting to, 57
  - connection, 57
    - configuring DIS, 212
  - disconnecting from, 108
  - ID, 49, 71, 212
    - playback, 49
  - playing
    - Logger Remote Control, 220
  - recording, 116
    - Logger Remote Control, 219
- 
- exerciseld command-line option, 71, 102
- Exit command, 197
- exiting
  - Logger Remote Control, 223
- expanding
  - playback segment, 126
- export
  - log file, 180
- exported data
  - understanding, 175
- ExportFile command, 213
- exporting
  - Access to, 180

- data
    - naming convention, 118
    - data to database, 176
    - file, 174, 213
  - ExportSection command, 213
  - 
  - F command-line option, 61-62, 101
  - 
  - f command-line option, 63, 101
  - 
  - FDD file, 42
  - features, 26
  - FED file, 30, 42, 61
    - changing, 53
    - specifying, 61, 64, 101
  - federate
    - specifying Logger federate name, 59
  - federate type
    - specifying, 60, 101
  - 
  - federateName command-line option, 59, 101
  - 
  - federateType command-line option, 60, 101
  - federation execution, 30
    - name, 60, 101
  - 
  - fedFileName command-line option, 61
  - file
    - annotating, 138
    - appending, 170, 213-214
    - backup, 121, 199
    - clearing
      - packets, 213
    - clearing segment, 168
    - closing, 110, 198
    - configuration, 95
    - CSV, 165
  - deleting
    - packet, 213
    - segment, 168
  - description
    - when recording, 113
    - when saving, 113
  - editing, 168
  - exporting, 174, 213
    - to database, 176
  - FDD, 42
  - FED, 42, 64
  - information
    - displaying, 111
    - editing, 112
  - jumping to beginning, 130
  - jumping to end, 130
  - lgrConfig.xml, 78
  - loading, 108
  - Logger
    - information, 111
  - merging, 170, 213
  - offsetting, 171
  - opening, 198
  - opening, annotation, 140
  - pausing, 124
  - playing, 124
  - playing HLA 1.3 in HLA 1516, 135
  - playing while recording, 128
  - rclgr, 219-220
  - recording to multiple, 117
  - repairing, 110
  - reverting to saved version, 168, 199
  - RID, 42
  - saving, 121, 199
    - segment to new file, 122
    - to new name, 122
  - starting, 116
  - trimming, 214
    - empty space, 170
  - upgrading format, 110
  - VR-Link.fed, 61
- filename
  - logger.log, 92
- filename command-line option, 100
- filter
  - entity ID, 149
  - HLA object name, 150
  - marking text, 152
  - message, 27
- FilterEntityIds command, 211



--filterEntityIds command-line option, 102  
FilterEntityTypes command, 147, 202



--filterEntityTypes command-line option, 100  
filterEntityTypes parameter, 147  
filtering  
    by entity type, 202  
    by PDU kind, 211  
    classes (HLA), 152  
    configuring, 205  
    configuring common entity types, 147  
    custom PDUs, 148  
    entities, 80  
    entity ID, 102  
    entity type, 146, 202  
    input and output, 146  
    object names, 101  
    PDU kind, 147  
    PDUs, 211  
    VR-Forces messages, 153  
FilterObjectNames command, 205



--filterObjectNames command-line option, 101  
FLEXIm, 39  
FOM, 41  
    database export, 180  
    flexibility, 53  
    primary, 61  
    supported, 30  
FOM Mapper, 31, 63, 101  
    initialization data, 101  
    specifying, 64  
    specifying at startup, 62  
FOM module  
    specifying, 61, 101  
FOM tab  
    displaying or hiding, 159



--fomMapperData command-line option, 64, 101



--fomMapperLib command-line option, 63, 101



--fomModules command-line option, 61, 101  
format  
    upgrading, 110  
frequency  
    packets for indexing, 78  
Frozen bit, 83  
full timeline, 106



-G command-line option, 100



GStreamer  
    configuring pipeline, 94  
GUI  
    configuration file, 107  
    disabling, 104  
    localizing, 43  
    modes, light and dark, 95



-h command-line option, 100



handle  
    start and end time, 125  
heartbeat, 212  
    defined, 51  
    HLA, 82, 210  
    setting, 74  
help  
    HTML5, 15  
Help command, 197  
hiding  
    attributes list, 157  
    FOM tab, 159  
high speed  
    playback, 127

histogram, 104, 131  
HLA, 30  
    1516  
        HLA 1.3 logger tapes, 226  
        playback, 50  
    advisory messages, 63, 210  
    commands, 205  
    configuring connection, 206  
    configuring for, 58  
    configuring time management, 65  
    database schema, 180  
    DDM, 85  
    Evolved  
        playback, 50  
    exporting to database, 180  
    FOM flexibility, 53  
    heartbeat, 82, 210  
    object name  
        filtering by, 150  
    passive subscription, 68, 210  
    specifications supported, 30  
    subscription control list, 66  
    subscription list, 211  
    support for, 53  
    time management, 92  
    timeout, 83, 211  
    traffic  
        interactions, 161  
        object instances, 160  
    traffic analyzer, 156  
HLA Configuration page, 65  
HLA Evolved  
    exporting to database, 180  
    federate type, 59  
    FOM, 61  
    FOM module, 61  
    MIM, 61  
HLA Traffic Analyzer  
    enabling and disabling, 101  
    options, 162  
hostname  
    license server, 39

## I

ID  
    entity  
        filtering by, 149  
IEEE 1516, 30

## -

--ignoreAdvisories command-line option, 63, 101  
ignoring  
    advisory messages, 63  
immediate  
    playback, 124  
    recording, 116-117  
importing  
    annotation file, 141  
incomplete file  
    repairing, 110  
indexing  
    configuring, 78  
information  
    file  
        displaying, 111  
        editing, 112  
        Logger file, 111  
informational message, 91  
input  
    filtering, 146  
inserting  
    file, 214  
installation, 34  
    default directory, Windows, 34  
    Linux, 35  
    RTI, 42  
    Windows, 34  
installing  
    MySQL, 183  
instant annotation, 139  
interaction  
    class, 159  
    parameter, 159, 161  
    viewing, 159  
    passive subscription, 68  
    subscribing to, 66  
interactions  
    HLA traffic, 161  
interface, 26  
    text, 195  
interim PDU, 51-52  
IP address, 102

## J

jumping  
    range annotation end, 142  
    range annotation start, 142  
    to beginning of file, 130

to end of file, 130  
to specific time, 130

## K

keyboard  
setting annotation times from, 140

## -

-l command-line option, 92, 100

## L

latency  
video stream  
reducing, 133  
layout  
window  
saving, 107  
lgrConfig.xml, 57  
configuration file, 78  
configuring high speed playback, 127  
enabling console for text interface, 195  
syntax and editing, 95  
versions for DIS and HLA, 48  
lgrControl example, 30  
lgrDump, 30  
lgrModSqlExporter example, 30  
license manager, 39  
license server  
hostname, 39  
light mode, enabling and disabling, 95  
Linux  
product installation, 35  
loading  
annotation file automatically, 124  
configuration file, 100  
file, 108, 198  
subscription list, 68, 205  
LoadPlugin command, 197  
LoadSubscriptionListFile command, 68, 86, 205

## -

--locale command-line option, 100  
localization, 27  
Logger GUI, 43  
log file, 92, 100  
callstack, 35  
sql\_export.txt, 180

## -

--logFileName command-line option, 100  
logFileName parameter, 92

Logger  
controlling multiple, 28, 218  
recording  
samples, 28  
viewing with Stealth, 28  
start, 104  
window, 104

Logger command, 78

Logger Control  
configuring, 203  
message  
configuring response to, 203

Logger Remote Control, 218  
command-line options, 223  
configuring Logger for, 218  
connection, 221  
exiting, 223  
playing file, 220  
rclgr file extension, 219-220  
recording exercise, 219  
refresh rate, 222  
starting, 218

logger.log, 100

loggerApp example, 30

logger-gui.conf, 107

## -

--loggerTickRate command-line option, 100  
loop

enabling or disabling, 199

looping

playback, 124

## -

-m command-line option, 91, 100

## M

macro

file naming convention, 118

MAK RTI

configuring for name reservation, 50

HLA 1516, 227

MAK RTI configuration, 42

- MAK\_INSTALL\_DIR environment variable, 34
- MAKLMGRD\_LICENSE\_FILE environment variable, 40
- MAK-RPR2-1-1.fed file, 30
- mapping
  - datatype
    - changing, 163
  - enumeration to string, 165
- marking text
  - filtering by, 152
- matrexTspiFomMapper example, 30
- Max Read Time, 84



- maxDrainInputTime command-line option, 101
- max-interaction-count parameter, 161



- mcastAddresses command-line option, 75, 102



- mcastTtl command-line option, 102
- MergeInFile command, 213
- merging
  - files, 170, 213
- message, 203
  - advisory, 63
  - filtering, 27
  - filtering by object name, 150
  - filtering VR-Forces, 153
  - informational, 91
  - log file, 100
  - maximum to read per tick, 84
  - VR-Link, 91



- messageLevel command-line option, 100
- Microsoft Access
  - configuring data source for, 180
- Microsoft Excel, 187, 190
- MIM
  - specifying, 61, 101



- MIM command-line option, 61, 101

- Min Read Time, 84
- MOM and Initialization Module
  - specifying, 61
- moving
  - to beginning of file, 130
  - to beginning or end of playback range, 130
  - to end of file, 130
  - to specific time, 130
- multicast address, 75, 102, 212
- multicast time-to-live, 73, 212
  - specifying, 102
- multiple
  - files
    - recording to, 117
  - network card, 73, 102
- multiple Logger
  - controlling, 28, 218
- MySQL, 187
  - configuring data source, 184
  - configuring data source for, 183
  - creating database, 184
  - installing, 183



- N command-line option, 59, 101



- n command-line option, 91, 100



- name
  - Logger federate, 59
  - object, 160
- name reservation, 50
  - configuring MAK RTI, 50
- naming
  - partial files, 118
- naming convention
  - for database tables and rows, 176
- NETN FOM, 31
- network
  - connection, 57
  - listening to, 111
  - read time
    - configuring, 84
  - requirements for Logger, 226
- network card
  - multiple, 73, 102

- network device, 212
- network interface address, 72
  - specifying, 73
- new file, 200
- NewFile command, 200
- notification level
  - setting, 91



- notifyLevel command-line option, 100
- Num PDUs Per Check, 84



- object
  - attribute
    - viewing, 159
  - class, 159
  - displaying statistics, 132
  - name, 160, 210
  - passive subscription, 68
  - subscribing to, 66
- object instances
  - HLA traffic, 160
- object name
  - filtering, 101
  - filtering by, 150
- Objects list, 165
- ODBC
  - configuring data source, 179
  - drivers, 174
- offset
  - video playback, 93
- OffsetTime command, 214
- offsetting
  - file, 171
  - packets, 214
- OMT file, 180
- OpenFile command, 198
- opening
  - file, 108, 198
  - incomplete file, 110
- option
  - HLA Traffic Analyzer, 162
- output
  - filtering, 146



- P command-line option, 70, 102



- packet
  - clearing, 168
  - count, 131
  - deleting, 168
    - from file, 213
  - dumping to text, 174
  - offsetting, 171
    - time, 214
  - preventing dropped, 72
  - removing
    - empty, 170
    - from file, 213
  - skipping, 127
- Packet Count View
  - scaling, 132
- parameter
  - allowPlaybackWithoutRegions, 90, 208
  - arrayBracketMap, 166
  - attributeMap, 166
  - commonEntityTypes, 147
  - customPdus, 148
  - enableDdm, 89
  - entity-type-map-file, 165
  - filterEntityTypes, 147
  - interaction, 161
  - logFileName, 92
  - max-interaction-count, 161
  - playbackDynamicAssociation, 90
  - playbackDynamicExtents, 90
  - recordConveyedRegions, 90
  - requestUpdates, 90
  - showConsole, 195
  - subscribeMode, 85
  - SubscribeRegionsAreGlobal, 85
  - SubscribeRegionsAreSpecified, 85, 90, 209
  - subscribeUnspecifiedAttributes, 88, 90, 209
  - useAsyncIO, 72
  - viewing interaction, 159
- partial file
  - naming convention, 118
- passive subscription, 68
  - configuring, 210
- path
  - default Windows install, 34
  - MAK RTI, 42
- Pause command, 198
- Pause on Record As, 117
- PauseRecording command, 200
- pausing
  - playback, 83, 124, 198

- recording, 119, 200
  - PDB files
    - Linux, 36
    - Windows, 36
  - PDU
    - filtering, 211
    - filtering by, 147, 211
    - filtering custom, 148
    - maximum to read per tick, 84
    - supported for database export, 179
  - performance
    - configuring, 84
  - pipeline
    - GStreamer
      - configuring, 94
  - Play command, 198
  - Play On Load, 124
  - playback, 48-49, 108
    - automatic, 124
    - bounding to annotation, 144
    - DDM, 89
    - described, 49
    - exercise ID, 49
    - fast, 80
    - faster
      - configuring, 197
    - high speed, 127
    - HLA 1516, 50
    - HLA Evolved, 50
    - loading file, 108
    - looping, 124, 199
    - mode, 49
    - moving to beginning, 130
    - moving to end, 130
    - pausing, 83, 124, 198
    - range
      - moving to beginning or end, 130
    - segment, 125-126
      - expanding, 126
    - setting speed, 126, 199
    - starting, 198
    - stopping, 124, 200
    - time regulating, 101
    - time-managed, 92
    - unpausing, 200
    - while recording, 128
  - playbackDynamicAssociation parameter, 90
  - playbackDynamicExtents parameter, 90
  - playbackMode, 89, 208
  - PlaybackRegionNotEnabled, 89
  - PlaybackRegionsUseConveyedExtents, 89
  - PlaybackRegionsUseData, 89, 208
  - Player domain
    - commands, 198
  - playing
    - file, 124
    - HLA 1.3 file in HLA 1516, 135
    - part of a file, 125-126
  - PlayPause command, 198
  - plug-in, 104
    - docking and undocking views, 107
    - example, 30
    - object statistics, 132
    - view, 106
  - point annotation
    - adding instantly, 139
    - converting to range, 141
    - editing, 141
  - port, 212
    - specifying UDP, 70
    - video playback, 93
  - preferences
    - setting, 78
  - PrefixFileToStart command, 214
  - prefixing
    - file, 214
  - product installation, 34
    - Linux, 35
    - Windows, 34
  - property
    - annotation, 141
    - connection, 57
  - protocol
    - supported, 30
      - HLA, 53
    - version
      - DIS, 102
- Q
- Qt Linguist, 43
- -
- r command-line option, 100
- R
- range annotation
    - adding instantly, 139
    - bounding playback to, 144
    - converting to point, 141
    - editing, 141
- 258
- MAK Technologies

- jumping to end, 142
- jumping to start, 142
- setting end time, 140
- rcmgr file extension, 219-220
- receive buffer, 73, 212
  - size
    - specifying, 102
- record, 48
  - mode, 48
- Record As
  - configuring, 201
- Record command, 200
- recordConveyedRegions parameter, 90
- Recorder domain
  - commands, 200
- recording, 48
  - and playing, 128
  - automatically, 117
  - canceling, 200
  - closing, 200
  - configuring, 201
  - described, 49
  - exercise, 116
    - ID, 49
    - Logger Remote Control, 219
  - immediately, 116
  - multiple files, 117
  - pausing, 119, 200
  - play, 124
  - repairing, 110
  - resuming, 119
  - saving, 121
  - starting, 116
  - stopping, 119
  - time constrained, 101
  - time-managed, 92
- RecordToMultipleFiles command, 200



--recvBufferSize command-line option, 102

refresh rate

Logger Remote Control, 222

region

conveyed, 88

subscription, 85

region descriptor, 86

region set, 86

remote

control, 28, 218

remote control ID, 219

specifying, 100, 202

Remote Control Logger, 28

removing

dead space, 214

empty packets, 170

packets from file, 213

repairing

incomplete file, 110

requesting

attribute value updates, 69

requestUpdates parameter, 90

resetting

annotation time point, 140

Restart command, 198

restoring

window configuration, 105

resuming

recording, 119

RevertFile command, 199

reverting

file, 199

to saved file, 168

RID file, 42

rid.mtl file, 42

row

naming conventions, 176

RPR FOM, 53, 62

revision

specifying at startup, 62

version, 62



--rprFomRevision command-line option, 62, 101



--rprFomVersion command-line option, 62, 101

RTI, 41

HLA 1516, 227

specifications supported, 30

RTI\_CONFIG environment variable, 42



--runCommand command-line option, 100



-s command-line option, 71, 102



-S command-line option, 75, 102



sample recording, 28  
 sampleFilter example, 30  
 Save, 121  
 Save As, 122  
 SaveFile command, 199  
 SaveFileAs command, 199  
 SaveSubscriptionListFile command, 67, 205  
 saving  
   annotation file, 140  
   connection properties, 57  
   file, 199  
     to new name, 122  
   files, 121  
   segment as new file, 122  
   subscription list, 67, 205  
   window layout, 107  
 scaling  
   Packet Count View, 132  
   time, 52  
 schema  
   database, 176  
 segment  
   playing, 125-126  
   saving as new file, 122  
   setting playback to annotation, 144  
 selecting  
   annotation, 141  
 send buffer, 73, 212  
   size, specifying, 102



--sendBufferSize command-line option, 102  
 sending  
   attribute value update, 69  
 set  
   region, 86  
 Set Time, 52, 130  
 SetBackChannelConnection command, 202  
 SetBackupOnSave command, 121, 199  
 SetCheckpointParameters command, 79, 201  
 SetCommonEntityTypes command  
   command  
     SetCommonEntityTypes, 202

SetConnectionParameters command, 59, 70, 202,  
   206, 212  
 SetCurrentTime command, 199  
 SetDdmParameters  
   command, 208  
 SetDdmParameters command, 85, 89  
 SetDefaultTapeDirectory command, 197  
 SetDisableTimeManagementTest command, 210  
 SetDrainInput command, 210, 212  
 SetDynamicNamePrefix command, 49, 210  
 SetEntityTracking command, 80, 197  
 SetFastJumpsWithoutDiff command, 80-81, 197  
 SetFollowingExportInterval  
   command, 199  
 SetFollowingInterval  
   command, 199  
 SetGuiConfigFilename command, 108, 197  
 SetHeartbeatIntervals  
   command, 80, 82, 210  
 SetHeartbeatRate command, 212  
 SetIgnoreAdvisories command, 63, 210  
 SetListenWhenIdle  
   command, 202  
 SetLoopAtEnd command, 199  
 SetNotifyLevel command, 91, 198  
 SetPacketViewInterval  
   command, 199  
 SetPassiveSubscription command, 68, 210  
 SetPauseOnRecordAs command, 201  
 SetPlaybackReadTimeLimit command, 80-81, 198  
 SetPlaybackSpeed command, 199  
 SetPlayOnLoad command, 199  
 SetRecordToMultipleFilesSettings command, 201  
 SetRemoteControlId command, 202-203  
 SetRemoteControlSettings command, 203  
 SetSaveConnectionConfiguration  
   command, 204  
 SetScaleAttributes command, 204  
 SetSendOnlyUpdatedValues  
   command, 69, 205  
 SetSkippingPlaybackThreshold command, 199  
 SetStartStopTimes command, 200  
 SetStopCondition command, 201  
 SetStopDuration command, 201  
 SetStopSize command, 201  
 SetSubscriptionLists command, 67, 98, 211  
 SetTempDir command, 198  
 SetTimeManagement command, 65, 211  
 SetTimeoutIntervals  
   command, 80, 83, 211  
 SetTimeoutRate command, 212  
 setting  
   checkpoint policy, 201

- cursor to time, 199
- DIS heartbeat, 74
- DIS timeout, 75
- end-of-file action, 124
- notification level, 91
- playback segment to annotation, 144
- playback speed, 126, 199
- preferences, 78
- SetVRFFiltering command, 205
- 
- showConsole command-line option, 100
- showConsole parameter, 195
- simulation
  - connecting, 108
  - recording, 116
  - standard
    - supported, 30
- Simulation domain
  - commands, 202
- SISO 1516 API, 30
- SISO enumeration XML document, 165
- SISO-REF-010.xml
  - configuration file, 165
- site ID, 71, 100, 202, 212
  - specifying, 102
- 
- siteId command-line option, 71, 102
- size
  - indexing, 78
- skip command
  - entity maintenance, 52
- Skip Time, 52
- skipping
  - packets, 127
- skippingPlaybackThreshold, 127
- SkipTime command, 200
- slider
  - start and end time, 125
  - zoom, 125
- slow-speed playback, 51
- specifying
  - application number, 102
  - configuration file, 100
  - FED file, 61, 64, 101
  - federate type, 60, 101
  - federation execution name, 60
  - FOM Mapper, 64
  - FOM modules, 61, 101
  - MIM, 61, 101
  - MOM and Initialization Module, 61
  - multicast time-to-live, 102
  - network interface address, 73
  - receive buffer size, 102
  - remote control ID, 100, 202
  - send buffer size, 102
  - site ID, 102
  - subscription list, 211
  - subscription region, 86
  - time management, 92
  - UDP port, 70
- speed
  - control, 105
  - setting for playback, 126
  - setting playback, 199
- speed factor
  - video playback, 93
- spreadsheet
  - exporting data to, 187
- SQL
  - exporting data to, 176
- sql\_export.txt log file, 180
- start
  - jumping to range annotation, 142
  - moving to, 130
- start time
  - setting dynamically, 140
- starting
  - Logger, 104
  - Logger Remote Control, 218
  - playback, 198
- startup
  - playback mode, 49
  - record mode, 48
  - running commands, 100
  - UNIX, 104
  - Windows, 104
- stateObserver example, 30
- status
  - field, 116
- stopping
  - playback, 124, 200
  - recording, 119
- StopPlayback command, 200
- StopRecording command, 202
- string list, 67
  - adding to configuration file, 98
- subnet mask, 72, 212
- subscribeMode, 90
- subscribeMode parameter, 85
- SubscribeRegionNotEnabled, 90, 208
- SubscribeRegionsAreGlobal, 90

- SubscribeRegionsAreGlobal parameter, 85
- SubscribeRegionsAreSpecified, 90
- SubscribeRegionsAreSpecified parameter, 85, 90, 209
- subscribeUnspecifiedAttributes parameter, 88, 90, 209
- subscribing
  - passively, 68
- subscription
  - region, 85
- subscription control list
  - creating, 66
- subscription list
  - DDM
    - setting programmatically, 88
  - loading, 68, 205
  - saving, 67, 205
  - specifying, 211
- subscription region
  - specifying, 86
- syntax
  - lgrConfig.xml, 95
- System domain
  - commands, 197

## T

- table
  - naming conventions, 176
- tape
  - annotating, 138
  - editing, 168
  - loading, 108
  - play, 124
- TCP, 102
- temporary file
  - recording to, 116
- text
  - dumping file to, 174
- text interface, 195
- time
  - command
    - entity maintenance, 52
  - indexing, 78
  - jumping to, 130
  - navigating during playback, 130
  - navigation, 130
  - offsetting packet, 214
  - setting, 131
  - setting cursor to, 199
  - sliders, 125

- time constrained
  - recording, 101
- time jump, updating entities after, 52
- time management
  - configuring, 211
  - in GUI, 65
  - enabling or disabling, 210
  - specifying use of, 92
- time regulating
  - playback, 101
- time scale
  - described, 50-51
  - during recording, 116
  - effects, 51
- timebar
  - color
    - changing, 222
- time-constrained
  - setting, 65

-

- timeConstrainingRecording command-line
  - option, 101

- timeline, 106
  - cursor, 131
  - moving, 130
  - zooming, 128
  - to annotation, 142

- timeout, 212
  - defined, 51
  - HLA, 83, 211
  - setting, 75

- timepoint
  - setting, 130

- time-regulating
  - setting, 65

-

- timeRegulatingPlayback command-line option,
  - 101

- timestamp
  - offsetting, 171

- toolbar, 105
  - docking and undocking, 107

- traffic analyzer, 156
  - array elements

- brackets, 165

- data views, 156

- trafficAnalyzerConfig.mtl
  - configuration file, 165

translation, 27  
 translation, Logger GUI text, 43  
 trimming  
   file, 170, 214  
 TrimStart command, 214  
 type  
   object, 160

## U

UDP port, 102  
   specifying, 70, 102  
 undo  
   edits, 168  
 undocking  
   toolbars and plug-in views, 107  
 UNIX  
   starting  
     Logger, 104  
 Unpause command, 200  
 UnpauseRecording command, 202  
 unpausing, 200  
 Update Annotation, 140  
 updating  
   annotation, 140  
 upgrading  
   file format, 110  
 useAsyncIO parameter, 72

## -

--useEmptyFomMapper command-line option, 63, 101

## -

-v command-line option, 100

## V

variable  
   adding to lgrConfig.xml, 98  
   syntax in lgrConfig.xml, 97  
 variable, environment, 40  
 variant, 160, 162  
 VCR controls, 105  
 velocity  
   scaling, 52  
 version  
   displaying, 100

## -

--version command-line option, 100

## video

  configuring GStreamer pipeline, 94  
   offset for playback, 93  
   playback  
     configuring, 93  
   port  
     playback, 93  
   recording  
     enable or disable, 92, 119  
   speed factor, 93  
   viewing, 125

## video stream

  configuration, 92  
   overview, 27  
   recording  
     VR-Vantage, 120  
     webcam, 120  
   reducing latency, 133  
   VLC, 133

## view control PDUs, 29

## viewing

  connection properties, 57  
   interaction parameter, 159  
   object attribute, 159  
   object statistics, 132  
   video, 125

## VLC

  reducing latency, 133  
   viewing streaming video in, 125

## VR-Forces message, 153

## VR-Link

  messages, 91

## VR-Link.fed file, 61

## VR-TheWorld\_FirstExperienceDIS, 29

## W

## webcam, 120

## window

  configuration, 105  
   layout  
     saving, 107  
   Logger, 104

## Windows

  default install directory, 34  
   product installation, 34  
   starting Logger, 104



-x command-line option, 60, 101



XML

RTI configuration file, 42

XML file, 180



zoom area, 125

zoom timeline, 106

zooming

Packet Count View, 132

timeline, 128

timeline to annotation, 142

zooming timeline, 129-130



# MAK Data Logger Quick Reference Card

Table 47. Logger commands

Command	Description
<b>System domain commands</b>	
DeleteFile <i>filename</i> (string)	Deletes the specified file.
Exit	Shuts down the Logger.
Help	Displays a list of available commands.
LoadPlugin <i>pluginName</i> (string)	Loads the specified plug-in.
SetDefaultTapeDirectory <i>defaultTapeDir</i> (string)	Sets the directory where the Logger creates and loads files.
SetEntityTracking <i>entityTracking</i> (bool)	Allows entity tracking to be processed.
SetFastJumpsWithoutDiff <i>fastJumpsWithoutDiff</i> (bool)	Uses checkpoints to establish the relative state of objects, but the packets between the checkpoint and jump time are not processed
SetGuiConfigFilename <i>filename</i> (string)	Specifies the name of the GUI layout configuration file. Default: <i>logger-gui.conf</i> .
SetNotifyLevel <i>v1Level</i> (int) <i>lgrLevel</i> (int)	Sets the notification level of VR-Link and the Logger.
SetPlaybackReadTimeLimit <i>playbackReadTimeLimit</i> (double)	Limits how long the Logger can spend reading packets during playback.
SetTempDir <i>directory</i> (string)	Sets the directory in which the Logger stores temporary Logger files.
<b>Player domain commands</b>	
ClosePlaybackFile	Closes the current playback file.

Table 47. Logger commands (continued)

Command	Description
OpenFile <i>filename</i> (string) <i>constructFilename</i> (bool)	Opens the specified file for playback.
Pause	Pauses playback.
Play	Starts playback. If the Logger is already playing this command has no effect.
PlayPause	Toggles between the paused and play state.
Restart	Starts playing from the beginning of the file.
RevertFile	Reverts a previously saved, but currently unsaved file to the previously saved state.
SaveFile <i>reopenAfterSave</i> (bool)	Saves a previously saved, but currently unsaved file to its current file name.
SaveFileAs <i>filename</i> (string) <i>description</i> (string) <i>writeDescription</i> (bool) <i>reopenAfterSave</i> (bool)	Saves the current file to new file.
SetBackupOnSave <i>backup</i> (bool)	Enables or disables automatic backup of previously saved files when saving edited files.
SetCurrentTime <i>time</i> (time)	Moves the timeline cursor to the specified time.
SetFollowingInterval	Specifies the default length of the zoom timeline, in seconds
SetFollowingExportInterval	Specifies the length of timeline data export frequency when playing Logger data from an active recording.
SetLoopAtEnd <i>value</i> (bool)	Enables or disables looping to start at the end of playback.
SetPacketViewInterval <i>interval</i> (double)	Sets the interval between tick marks in the Packet Count View and Packet Size View.
SetPlaybackSpeed <i>speed</i> (double) <i>skippingPlayback</i> (bool)	Sets the playback speed of the Logger.
SetPlayOnLoad <i>value</i> (bool)	Enables starting playback immediately after opening a file.
SetSkippingPlaybackThreshold <i>skippingPlaybackThreshold</i> (double)	

Table 47. Logger commands (continued)

Command	Description
	Set the playback speed above which skipping playback mode is used automatically.
SetStartStopTimes <i>startTime</i> (time) <i>stopTime</i> (time)	
	Sets the start and stop time of the Logger.
SkipTime	Move the timeline cursor (forward or backward) relative to current time.
StopPlayback	Stops playback. This command has no effect if the Logger is not in the playback state.
Unpause	Resumes playback. This command has no effect if the Logger is not paused.
<b>Recorder domain commands</b>	
CancelRecording	Cancels the current recording.
CloseRecordFile	Closes the file currently recording.
NewFile <i>filename</i> (string) <i>description</i> (string) <i>constructFilePathAndName</i> (bool) <i>overwrite</i> (bool)	
	Opens a new file with the given name and description for recording.
PauseRecording	Pauses the recording process.
Record	Starts recording to a new file.
RecordToMultipleFiles <i>fileName</i> (string)	Starts recording to new files.
SetCheckpointParameters <i>policy</i> (int) { <i>size</i> (int)   <i>count</i> (int)   <i>time</i> (time)}	
	Sets the checkpoint policy parameters for generating checkpoints. 0 — count, in number of packets. 1 — size of packets, in bytes. 2 — time, in seconds between checkpoints.
SetPauseOnRecordAs <i>record</i> (bool)	Determines how the Logger behaves when given the Record As command.
SetRecordToMultipleFilesSettings <i>duration</i> (double) <i>namingConvention</i> (string)	
	Set the multiple file recording parameters.

Table 47. Logger commands (continued)

Command	Description
SetStopCondition <i>condition</i> (int)	Specifies the stop condition for recording: 0 — no condition. 1 — duration (enables SetStopDuration). 2 — file size (enables SetStopSize).
SetStopDuration <i>duration</i> (time)	Stops recording at the specified time if SetStopCondition is set to 1.
SetStopSize <i>filesize</i> (int64)	Stops recording when the file reaches <i>filesize</i> if SetStopCondition is 2.
StopRecording <i>closeAndOpenForPlayback</i> (bool)	Stops recording and ends.
UnpauseRecording	Resume a paused recording.
<b>Simulation domain commands (protocol-independent commands)</b>	
Connect	Connects to the network simulation using the previously set parameters.
Disconnect	Disconnects from the network simulation.
FilterEntityTypes <i>entityType1</i> ... <i>entityTypeN</i> (string)	Specifies a list of entity types to list in the Filter by Entity Type dialog box and enables filtering for these entity types.
SetBackChannelConnection <i>useBackChannel</i> (bool) <i>address</i> (string) <i>port</i> (int) <i>interface</i> (string)	Set the parameters for the back channel connection configuration.
SetCommonEntityTypes <i>entityType1</i> ... <i>entityTypeN</i> (string)	Specifies a list of entity types to list in the Filter by Entity Type dialog box.
SetListenWhenIdle <i>state</i> (bool)	Enable or disable listening to the network when not recording or playing.
SetRemoteControlSettings <i>process</i> (bool) <i>process</i> (bool) <i>recordskippingPlayback</i> (bool) <i>allowDelete</i> (bool) <i>allowAll</i> (bool) <i>sendResponses</i> (bool) <i>crippleGui</i> (bool) <i>useLegacyPdu</i> (bool) <i>connectSendInterval</i> (double) <i>heartbeatSendInterval</i> (double)	Specifies how the Logger responds to Logger Control messages.
SetSaveConnectionConfiguration <i>saveConnectionConfiguration</i> (bool)	

Table 47. Logger commands (continued)

Command	Description
	Enables or disables saving of connection information to <i>lgrConfig.xml</i> .
setScaleAttributes <i>scale</i> (bool)	Enables or disables attribute scaling due to changes in playback speed.
setSendOnlyUpdatedValues <i>state</i> (bool)	If true, when the Logger receives attribute value update requests, only send updates for values that have been updated in the Logger file. Do not send default values.
setVRFFiltering <i>filter</i> (bool) <i>loId</i> (int) <i>hiId</i> (int)	Configures VR-Forces message filtering.
<b>HLA-specific commands</b>	
CommonObjectNames <i>objectName1</i> ... <i>objectNameN</i> (string)	Specifies a list of object names to list in the Filter by Object Names dialog box. Does not enable filtering of these object names.
EnableRequestUpdates <i>state</i> (bool)	Enable or disable whether request updates is invoked when an object is discovered. Default: true.
FilterObjectNames <i>objectName1</i> ... <i>objectNameN</i> (string)	Specifies a list of object names to list in the Filter by Object Names dialog box and enables filtering for these entity object names.
LoadSubscriptionListFile <i>filename</i> (string)	Loads a subscription list file.
SaveSubscriptionListFile <i>filename</i> (string)	Saves the subscription settings to an XML file with the specified name.
SetConnectionParametersHLA <i>federateType</i> (string) <i>federationName</i> (string) <i>fedFile</i> (string) <i>ignoreAdvisories</i> (bool) <i>fomVersion</i> (double) <i>fomRevision</i> (int) <i>fomMapper</i> (string) <i>fomMapperData</i> (base64) <i>useEmptyFomMapper</i> (bool) <i>useMatrexFomMapper</i> (bool) <i>matrexFomMapperData</i> (string)	
SetConnectionParametersHLAe <i>federateName</i> (string) <i>federateType</i> (string) <i>federationName</i> (string) <i>fedFile</i> (string) <i>fomModules</i> (string) <i>MIM</i> (string) <i>ignoreAdvisories</i> (bool) <i>fomVersion</i> (double) <i>fomRevision</i> (int) <i>fomMapper</i> (string) <i>fomMapperData</i> (base64) <i>useEmptyFomMapper</i> (bool) <i>useMatrexFomMapper</i> (bool) <i>matrexFomMapperData</i> (string)	

Table 47. Logger commands (continued)

Command	Description
	Specifies HLA (1.3 and 1516) or HLA Evolved connection parameters.
SetDdmParameters <i>enableDdm</i> <i>playbackMode</i> <i>subscribeMode</i> <i>playbackDynamicAssociation</i> <i>playbackDynamicExtents</i> <i>allowPlaybackWithoutRegions</i> <i>recordConveyedRegionsrequestUpdatessubscribeUnspecifiedAttributes</i>	Specifies DDM parameters.
SetDisableTimeManagementTest <i>disableTesting</i> (bool)	
	Disables time management testing if it causes the Logger to misbehave.
SetDrainInput <i>maxTime</i> (double), <i>minTime</i> (double)	
	Specifies the minimum and maximum amount of time, in seconds, to spend reading messages from the network each tick.
SetDynamicNamePrefix <i>prefix</i> (string)	Specifies the prefix that the Logger attaches to the beginning of object names that begin with HLA_ when it is recording exercises.
SetHeartbeatIntervals " <i>className</i> (string): <i>interval</i> (float): <i>inheritable</i> (bool) ..."	
	Specifies a heartbeat interval for playback. You can specify multiple classes.
SetIgnoreAdvisories <i>mode</i> (bool)	Specifies the Logger's response to HLA advisory messages. Default: false.
SetPassiveSubscription <i>mode</i> (bool)	Configures passive subscription for HLA. Default: false.
SetSubscriptionLists <i>objectClasses</i> (stringList) <i>interactionClasses</i> (stringList)	
	Sets the class subscription list.
SetTimeManagement <i>timeConstrainedRecording</i> (bool) <i>timeConstrainedPlayback</i> (bool) <i>timeRegulatingRecording</i> (bool) <i>timeRegulatingPlayback</i> (bool) <i>lookahead</i> (double)	
	Configures time management options.

Table 47. Logger commands (continued)

Command	Description
<code>SetTimeoutIntervals "className(string):interval(float):inheritable(bool) ..."</code>	Specifies an object timeout for recording. You can specify multiple classes.
<b>DIS-specific commands</b>	
<code>AddCustomPDU pduName(string) pdukind(string) entityIdOffset(string) entityTypeOffset(string)</code>	Specifies a PDU to add to the Filter by PDU Kind dialog box.
<code>CommonEntityIds id1 ... idN(string)</code>	Specifies a list of entity IDs to list in the Filter by Entity IDs dialog box. Does not enable filtering of these entity IDs.
<code>FilterEntityIds id1 ... idN(string)</code>	Specifies a list of entity IDs to list in the Filter by Entity IDs dialog box and enables filtering for these entity IDs.
<code>SetConnectionParameters port(int) exerciseId(int) siteId(int) appNumber(int) useAsynchIO(bool) sendBufferSize(int) recvBufferSize(int) multicastTtl(int) destAddr(string) subnetMask(string) deviceAddr(string) mcastAddresses(stringList)</code>	Specifies parameters for the DIS exercise connection.
<code>SetDrainInput maxTime(double), numPdusToRead(int)</code>	Specifies the maximum amount of time, in seconds, to spend reading messages from the network and the number of PDUs to read between each check of the maximum time.
<code>SetHeartbeatRate rate(double)</code>	Specifies the DIS heartbeat rate.
<code>SetTimeoutRate rate(double)</code>	Specifies the DIS timeout rate.
<b>Editor domain commands</b>	
<code>AppendFileToEnd filename(string)</code>	Appends the file <i>filename</i> to the end of the open file.
<code>ClearSection start(time) end(time)</code>	Removes all packets between the <i>start</i> and <i>end</i> times in a file.
<code>ConvertFile</code>	Converts the current file to the latest file format.

Table 47. Logger commands (continued)

Command	Description
CutSection <i>start</i> (time) <i>end</i> (time)	Removes all packets between the <i>start</i> and <i>end</i> times in a file.
ExportFile <i>exportFormat</i> (string) <i>destination</i> (string) <i>checkpoint</i> (bool) <i>openAfterExport</i> (bool)	Exports a file using a given <i>exportFormat</i> to a <i>destination</i> .
ExportSection <i>exportFormat</i> (string) <i>destination</i> (string) <i>start</i> (time) <i>end</i> (time) <i>offset</i> (double) <i>checkpoint</i> (bool) <i>openAfterExport</i> (bool)	Exports a section of a file using a given <i>exportFormat</i> to a <i>destination</i> .
MergeInFile <i>filename</i> (string) <i>offset</i> (double)	Merges the Logger file <i>filename</i> into the open file.
offsetTime <i>offset</i> (double)	Offsets the time of the packets in the open file by the <i>offset</i> value.
PrefixFileToStart <i>filename</i> (string)	Inserts the file named <i>filename</i> at the start of the open file.
TrimStart	Removes any dead time from the start of the file and offsets all packets so that the first packet timestamp is 0.0.

Table 48. Keyboard Shortcuts

Action	Key	Action	Key
Annotations	Shift+A	Open	Ctrl+O
Append to End	Ctrl+Shift+E	Pause	Ctrl+P
Clear Section	Ctrl+Shift+Delete	Packet Count View	Shift+C
Close	Ctrl+W	Packet Size View	Shift+S
Connection	Ctrl+Shift+C	Play	Ctrl+P
Create Instant Point Annotation	\	Preferences	Ctrl+Shift+P
Create Instant Range Annotation	[	Prefix to Start	Ctrl+Shift+W
Create Point Annotation	Ctrl+\	Properties	Enter
Create Range Annotation	Ctrl+[	Record	Ctrl+R
Decrease Speed	Ctrl+Down	Record As	Ctrl+N
Delete Annotation	Delete	Record To Multiple Files	Ctrl+M
Delete Section	Ctrl+X	Revert	Ctrl+Shift+R

Table 48. Keyboard Shortcuts (continued)

Action	Key	Action	Key
Disconnect	Ctrl+D	Save	Ctrl+Shift+S
Exit	Ctrl+Q	Save As	Ctrl+Shift+A
Increase Speed	Ctrl+Up	Save Recorded Data	Ctrl+Shift+S
Jump to End	End	Set Start and End Times	Ctrl+B
Jump to Start	Home	Set Zoom	Ctrl+I
Jump to Time	Ctrl+T	Stop	Ctrl+S
Merge In File	Ctrl+Shift+I	Toggle Loop at End	Ctrl+L
Modify Annotation	Enter	Trim Start	Ctrl+Shift+T
Object Statistics	Shift + O	Update Annotation	]
Offset Time	Ctrl+Shift+O	Upgrade File Format	Ctrl+Shift+U

Table 49. Command-line Options

Option	Description
<code>--allowAllRemoteControl mode</code>	Allow (1) or do not allow (0) remote control PDUs.
<code>-c mode</code>	If <i>mode</i> = 1, show the Logger console.
<code>--configFile filename</code>	Specifies the configuration file to load.
<code>--defaultTapeDir directory</code>	Specifies the default directory for Logger files.
<code>--filterEntityTypes</code>	Adds entity types to Filter by Entity Type dialog box and selects them.
<code>--ignore_rest</code>	Ignore all arguments after this one.
<code>-h</code>	Displays a brief summary of Logger command-line arguments.
<code>-l logfile</code>	Specifies a file to send notification messages to. Default: <i>logger.log</i> .
<code>--loggerTickRate rate</code>	The interval for the Logger tick rate, in milliseconds.
<code>-m level</code>	Specifies the notification level for Logger messages. Range 0-4.
<code>-n level</code>	Specifies the notification level for VR-Link messages. Range 0-4.
<code>-r command</code>	Specifies a Logger command to run. Can be used multiple times.
<code>--remoteControlId ID</code>	Specifies the Logger's remote control ID. Default: site ID.
<code>-v</code>	Displays version information and exits.

Table 49. Command-line Options (continued)

Option	Description
<b>HLA Only</b>	
<code>--disableTMTTesting mode</code>	Disable time management for testing.
<code>--enableTrafficAnalyzer mode</code>	Enable (1) or disable (0) the HLA Traffic Analyzer.
<code>-f libname</code>	Specifies the FOM Mapper to use if you are not using the default FOM.
<code>--federateType type</code>	Specifies the federate type for the Logger federate.
<code>--filterObjectNames names</code>	Filter the listed object names. Accepted multiple times.
<code>--fomMapperData data</code>	Specifies FOM Mapper initialization data, if required.
<code>--fomModules module</code>	Specifies a FOM module for the exercise. (accepted multiple times, HLA Evolved only)
<code>-F fedfile</code>	Specifies the FED file for the exercise.
<code>--ignoreAdvisories mode</code>	If 1, ignore HLA advisory messages. If 0, do not ignore.
<code>--maxDrainInputTime time</code>	Specifies the maximum time to drain input.
<code>--MIM MIM_file</code>	Specifies the MIM for the exercise. (HLA Evolved only)
<code>-N federate_name</code>	Specifies the federate name for the Logger federate. (HLA Evolved only)
<code>--rprFomVersion version</code>	Specifies the version of the RPR FOM to use.
<code>--rprFomRevision revision</code>	Specifies the FOM revision to use.
<code>--ignoreAdvisories {0 1}</code>	Specifies whether (1) or not (0) the Logger ignores advisory messages.
<code>--timeConstrainingRecording mode</code>	Use time constrained for recording.
<code>--timeRegulatingPlayback mode</code>	Use time regulating for playback
<code>--useEmptyFomMapper {0 1}</code>	Specifies whether (1) or not (0) the Logger uses an empty FOM Mapper.
<code>-x ExName</code>	Specifies the federation execution name. Default: VR-Link.
<b>DIS Only</b>	
<code>-A address</code>	Specifies the default IP address to which the Logger sends PDUs. If this option is not used, the Logger uses the computer's broadcast address.

Table 49. Command-line Options (continued)

Option	Description
-a <i>appnumber</i>	Specifies the application number.
(-D   --deviceAddString) <i>address</i>	Specifies the network interface address.
--disVersion <i>num</i>	Sets the DIS protocol version for PDUs sent onto the network. <i>num</i> can be 4 (DIS 2.0.4), 5 (IEEE 1278.1), or 6 (DIS 2.1.4, IEEE 1278.1a).
(-e   --exerciseId) <i>ID</i>	Sets the exercise ID.
--filterEntityIds <i>IDs</i>	Filter the specified entity IDs. Acceptable multiple times.
--mcastTtl <i>ttl</i>	Specifies the multicast time-to-live.
-P <i>port</i>	Specifies which DIS port (UDP port if -A not specified, otherwise, TCP) the Logger uses to send or receive data. Default: 3000.
--recvBufferSize <i>size</i>	Specifies the receive buffer size.
--sendBufferSize <i>size</i>	Specifies the send buffer size.
-s <i>ID</i>	Specifies the site ID.





