



# SensorFX

---

First Experience

Copyright © 2018 VT MAK  
All rights Reserved. Printed in the United States.

Under copyright laws, no part of this document may be copied or reproduced in any form without prior written consent of VT MAK.

VR-Exchange™, VR-TheWorld™, VR-Vantage™, DI-Guy™, and DI-Guy Scenario™ are trademarks of VT MAK. MAK Technologies®, VR-Forces®, RTIspy®, B-HAVE®, and VR-Link® are registered trademarks of VT MAK.

GL Studio® is a registered trademark of The DiSTI® Corporation.

Portions of this software utilize SpeedTree® technology (©2008 Interactive Data Visualization, Inc.). SpeedTree is a registered trademark of Interactive Data Visualization, Inc. All rights reserved.

SilverLining™ is a trademark of Sundog Software.

Terrain Profiles are based in part on the work of the Qwt project (<http://qwt.sourceforge.net>).

3ds Max® is a registered trademark of Autodesk, Inc.

All other trademarks are owned by their respective companies.

VT MAK  
150 Cambridge Park Drive, 3rd Floor  
Cambridge, MA 02140 USA

Voice: 617-876-8085  
Fax: 617-876-9208

[info@mak.com](mailto:info@mak.com)  
[www.mak.com](http://www.mak.com)

Revision VRV-2.3.1-13-180716



# 1. SensorFX First Experience

Thank you for deciding to try out VR-Vantage and the SensorFX plug-in. VR-Vantage is MAK's line of visualization products. It includes VR-Vantage Stealth, a 3D and 2D visualization tool with a focus on information about your virtual battlefield, VR-Vantage IG, which provides realistic 3D scenes of your virtual simulation environment, VR-Vantage PVD, a 2D plan view display, and the VR-Vantage Toolkit, which gives you the power to customize and build VR-Vantage-based applications.

The SensorFX plug-in was created by JRM Technologies. It provides sensor views for infrared (IR) and night vision goggles (NVG). SensorFX requires that terrain and simulation objects be materially classified so that they can be properly represented. Material classifications have been provided for the VR-Village terrain database. Vantage IG 2.3.1 also supports material classification on demand for terrains configured using an osgEarth *.earth* file. For details, please see *SensorFX Users Guide*.

This first experience guide provides a quick guided tour of the SensorFX plug-in. It assumes that you have previously installed VR-Vantage and are already familiar with VR-Vantage Stealth. It also assumes that you are running on Microsoft Windows. If you have not used VR-Vantage Stealth, please read *VR-Vantage Stealth First Experience Guide* before trying this guide.

To get the full experience you will need:

- ♦ VR-Vantage 2.3.1
- ♦ SensorFX
- ♦ MAK Data Logger
- ♦ The *Raid-SFX-ViewControl-DIS.lgr* logger file.

## **1.1. Install SensorFX**

SensorFX is provided as a standard Windows installer and a data package. To install it, just run the installer. Be sure to install it into the version of VR-Vantage for which it was compiled, for example, VR-Vantage 2.3.1, VC 12. If you are going to use the MAK Data Logger to stimulate VR-Vantage with SensorFX, install it also.

## **1.2. Start VR-Vantage with SensorFX**

1. On the Start menu, choose **All Programs → MAK Technologies → VR-Vantage 2.3.1 → VR-Vantage with SensorFX**. VR-Vantage Stealth starts up. The Load Terrain dialog box opens. (On Windows 10, use **MAK Technologies → VR-Vantage with SensorFX**.) The Load Terrain dialog box opens.
2. Select the Load Terrain option.
3. In the Load Terrain list, select *VR-Village.mtf*.
4. Click OK. The terrain is loaded.



Figure 1-1. VR-Village terrain, Stealth observer mode

### **1.3. Explore the SensorFX Plug-in**

Vantage IG installs four sensors:

- ♦ Visual. The Visual sensor displays objects using the naked-eye visual light spectrum.
- ♦ MWIR. The Midwave Infrared (MWIR) sensor displays objects using the intermediate infrared spectrum. In guided missile technology this is the atmospheric window in which the homing heads of passive IR heat seeking missiles are designed to work. It can be white hot or black hot.
- ♦ LWIR. The Long Wave Infrared (LWIR) sensor displays objects using the long wave infrared spectrum. This is the thermal imaging region, in which sensors can obtain a completely passive picture of the outside world based on thermal emissions only and requiring no external light or thermal source such as the sun, moon or infrared illuminator. It can be white hot or black hot.
- ♦ NVG. The NVG sensor simulates night vision goggles, which allow images to be produced in levels of light approaching total darkness.

Sensor settings are observer-specific. The default observers have the following sensors:

- ♦ Stealth and Out-the-Window: Visual sensor.
- ♦ MWIR (SensorFX): MWIR white hot.
- ♦ LWIR (SensorFX): LWIR white hot.
- ♦ NVG (SensorFX): NVG.

SensorFX starts up with the Stealth observer mode, which uses the Visual sensor ([Figure 1-1](#)). Notice that it is visually richer than the lighting in VR-Vantage without SensorFX.

In the Observer Settings Toolbar, select MWIR (SensorFX) observer mode. The scene changes to show IR (white hot) ([Figure 1-2](#)). (The first time you select a SensorFX observer mode, it may take a few seconds for the view to change.)



Figure 1-2. VR-Village-SensorFX terrain, MWIR observer mode

In the Observer Settings Toolbar, select LWIR (SensorFX) observer mode. See if you can tell the difference from MWIR.

In the Observer Settings Toolbar, select Stealth. In the Scene Settings dialog box, change the time to 10:00 PM. You cannot see much, can you?

Select the NVG observer mode.

Now you can see the village ([Figure 1-3](#)). Try the LWIR and MWIR observer modes also.



Figure 1-3. VR-Village-SensorFX terrain, NVG observer mode

### 1.3.1. View a Simulation

Now let's run the MAK Logger and add some action to the scene. You will have to start the Logger. Then you will have to connect to the network. We will assume that you are using the default port for the Logger and VR-Vantage Stealth (3000).

1. On the Start Menu, choose **Programs** → **MAK Technologies** → **Logger X.X** → **Logger DIS**. The Logger starts.
2. Choose **File** → **Open**. The Open File dialog box opens.
3. Load *Raid-SFX-ViewControl-DIS.lgr*.
4. Click Open.
5. Choose **Play** → **Toggle Loop at End**. This will cause the recording to continuously loop back to the beginning when it reaches the end.
6. Choose **Play** → **Play/Pause**, or click the Play button.

### Connect to the Simulation Network

1. In VR-Vantage, open the terrain *MAK Earth - MCOD (online).mtf*.
2. Set the time back to 10:00 AM and select the Stealth observer mode.
3. Choose **Settings** → **Connection**. The Simulation Connections dialog box opens.
4. Select the DIS Connections page. The default connection is DIS (7) localhost (Figure 1-4).

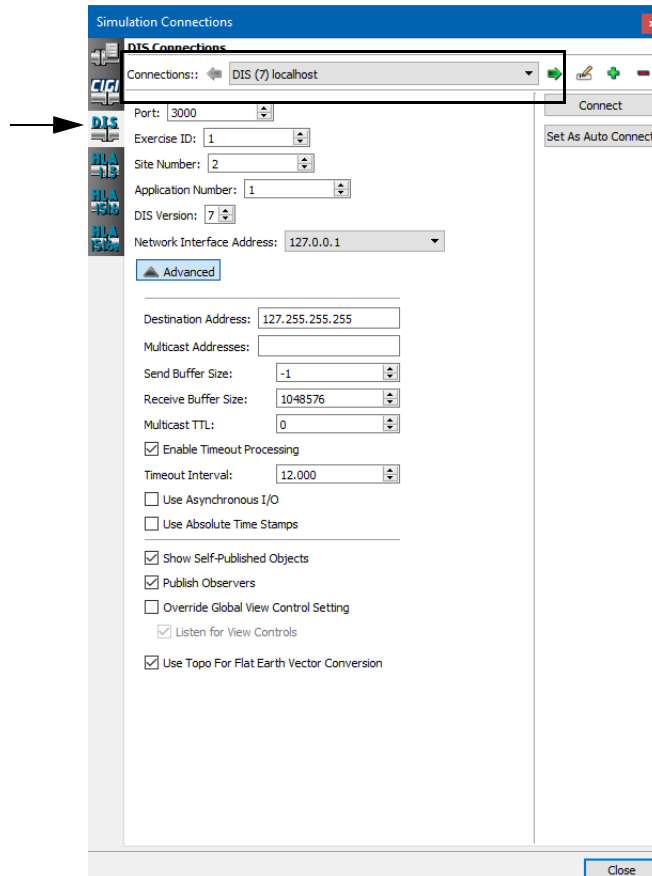


Figure 1-4. DIS Connection

5. In the Connections drop-down list, select DIS (7).
6. Click Connect.
7. Click Close.

## **View the Simulation**

VR-Vantage will take a few seconds to load model files. Then it will start to display the action in this simulation. The Logger file sends view control messages to VR-Vantage to control the observer. The initial view controls place the observer over the Ala Moana section of Honolulu, Hawaii. We want to turn off view controls so that we can focus on specific locations.

### ***Disable View Controls***

1. Choose **Settings** → **View Controls**.
2. If the observer is attached to an entity, press **z**. The observer stops following the entity to which it was attached.

## **1.3.2. View Thermal Effects at Different Times of Day**

In this exercise, you will change the time so that you can see how thermal effects change based on the time of day.

Two common characteristics of thermal sensor simulations are diurnal cycle effects and thermal cross-over. This can be illustrated by changing the time-of-day from daytime to night-time, and observing the changes in the scene intensities. During the day, vegetation like trees and grass appears to be cooler than soils, rocks, and man-made construction materials like asphalt, rooftops, and concrete. Deep into the night, vegetation appears warmer than those other materials. Near sunrise and sunset, scene elements demonstrate a thermal convergence. As a result their apparent temperatures are about the same, and the scene appears to wash out. However, the vehicle hot spots still stand out.

1. Select the LWIR (SensorFX) observer mode. After a few seconds, the scene changes to LWIR. (If you have not done so, turn off view controls and press **z**.)
2. Choose **Settings** → **Scene**. The Scene Settings dialog box opens to the Date and Time page.
3. Move the observer to view the warehouse area where the entities in this scenario are located.
4. Change the time to different times throughout the day and night. You will see how the “hot spots” stand out at different times of day.

The following illustrations show the same scene captured at noon ([Figure 1-5](#)) and 2 AM ([Figure 1-6](#)). Notice how at noon, the hottest part of the scene (in white) is the pavement and the building in the upper left corner. At 1 AM, the hottest part of the scene is the building.



Figure 1-5. LWIR, white hot, noon



Figure 1-6. LWIR, white hot, 2 AM

### 1.3.3. Change Sensor Effects

The IR and NVG sensors let you adjust and turn on and off the following effects:

- ♦ Blur. The sharpness of the scene.
- ♦ Noise. The graininess of the scene.
- ♦ Gain. The contrast in the scene.
- ♦ Level. The brightness of the scene.

**To change the sensor effects:**

1. Choose **Settings** → **Display**. The Display Settings dialog box opens.
2. Select the Sensor Settings page. (Figure 1-7 shows the settings for the NVG sensor. The settings for LWIR and MWIR are slightly different.)

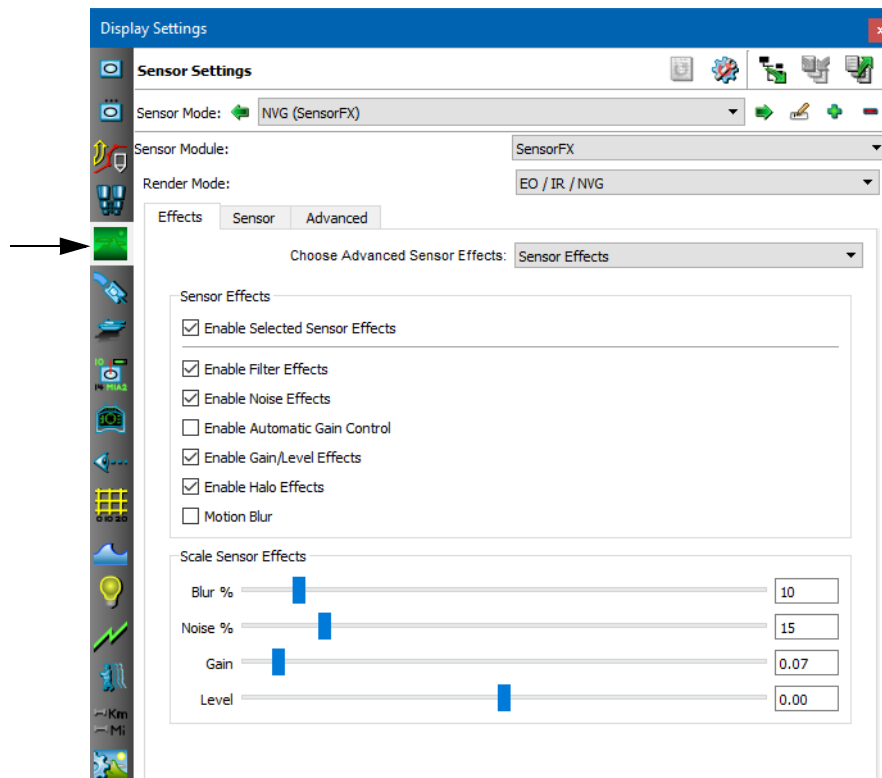


Figure 1-7. Sensor Settings page, NVG sensor

3. In the VR-Vantage window, change the observer to NVG (Out-the-Window). (Turn off view controls.)
4. On the Effects tab or the Sensor Settings page, in the Scale Sensor Effects group box, move the sliders for the different effects. Observe the changes to the scene.

Figure 1-8 shows a scene in NVG (Out-the-Window) observer mode with different sensor effect settings.

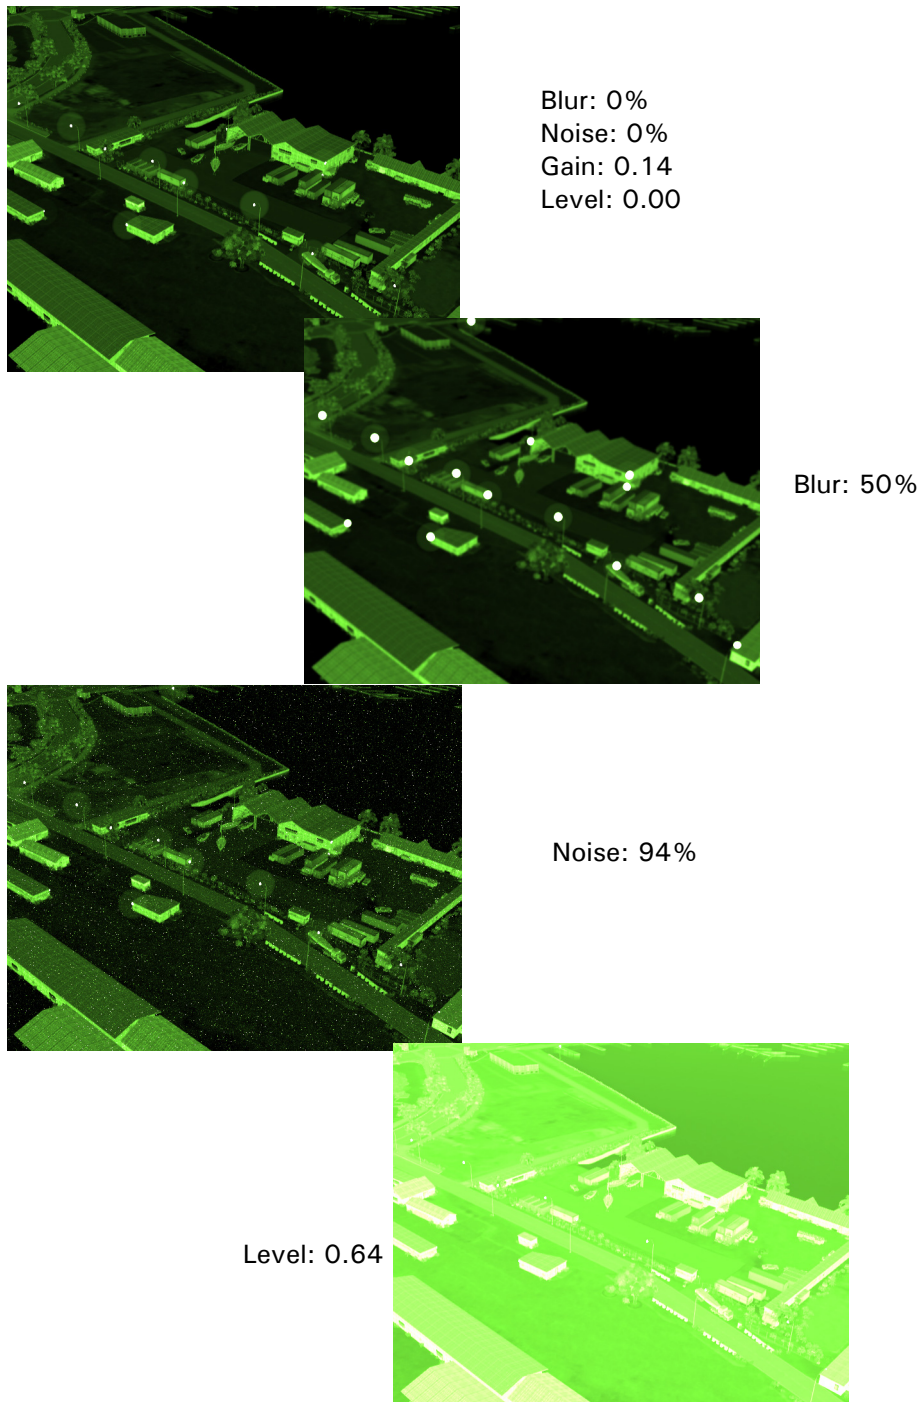


Figure 1-8. NVG observer mode

### **White Hot versus Black Hot**

So far when we selected an IR observer mode, we have just used the default sensor, which is white hot. Black hot inverts the view and all hot spots are black instead of white. Compare [Figure 1-9](#) to [Figure 1-5](#).

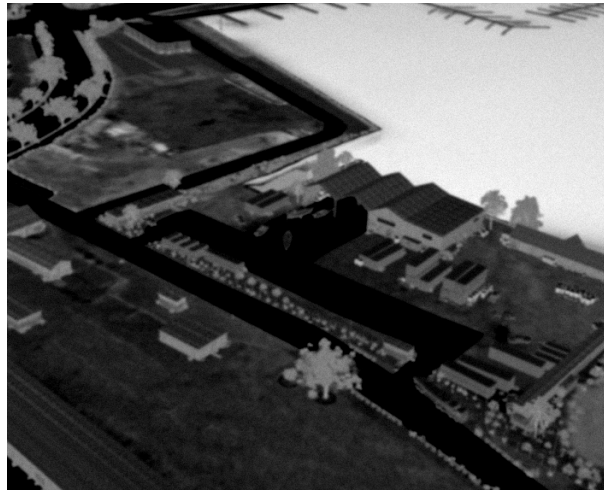


Figure 1-9. LWIR, black hot, noon

#### **To switch an IR sensor to black hot:**

1. Select LWIR (SensorFX) observer mode.
2. Choose **Settings** → **Display**. The Display Settings dialog box opens.
3. Select the Sensor Settings page ([Figure 1-7](#)).
4. In the Sensors list, select the LWIR.
5. On the Effects tab, in the Sensor Effects group box, select Enable Blackhot.

## **1.4. Learn More**

For more information about Vantage IG, please see *SensorFX Users Guide*.

